STARTEK
ARCHITECTURAL LIGHTING

Rep/Agent		Type	
Project			
Order No.		Date	

Shallow Beam Shape
Suspended
Direct



Key Features

- Extruded aluminum single piece housing
- Continuous lensing standard – runs up to 100'
- Light levels can be factory set
- 0-10V dimming to 1% is standard
- 120-277V for power enclosure
- Three power choices of Hyper Drive remote power system

5 Year Warranty | BABA Compliant | BAA Compliant | Intertek | RoHS Compliant | Declare.

Specifications

Construction

- Continuous extruded 6063 T5 aluminum
- Mechanically attached end caps with no exposed fasteners enhance architectural aesthetic and prevent light leak.

Dimensions

- Nominal dimensions: 3.5" x 1.5"
- Nominal thickness: 0.08"

Finish

- Powder coated
- Colors: White, Black, Silver or Premium Finishes
- End Caps: Color-matched to housing
- Custom colors available. Consult factory for more information.

Luminaire Length

- Standard individual lengths: 2', 4', 6' or 8'
- Fixture and run lengths are available in 1/16" increments.
- Using internal joiners, sections can be joined to form longer, continuous rows.

Source

- CCT options: 2700K, 3000K, 3500K, 4000K, or 5000K
- All within 3 MacAdam ellipses
- 90 CRI (R9 50 min) available

Lensing

- 0.060" thick impact resistant acrylic lens
- Soft diffuse direct lighting

Operating Temperature

- -40°C to 50°C (-40°F to 122°F)

Lithium Ion Battery

- Provides up to 660 lm (6W) or up to 1100 lm (10W) for 90 minutes.
- Certifications: UL924 listed, Class 2 compliant, and Title 20 CEC (California Energy Commission) compliant

Dimming (Integral) Driver

- Constant current programmable LED driver
- Output current: 0-10V, dim to 1% (UL listed, Class P)
- Ring wave surge protection: 2.5KV ring
- Power factor: >0.90

Certifications

- Build America Buy America compliant
- Buy American Act compliant
- Intertek cETLus Listed
- RoHS (Restriction of Hazardous Substances)
- JA8 compliant
- Suitable for dry and damp locations

Packaging

- Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Warranty

- 5-year limited warranty.

The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

Ordering Logic

SHAL-4X6RECT-750-SD-35K-90-PW-CRW-1C-E1-HD01

Series	Length[1]	Direct Output[2]	Direct Distribution	CCT	CRI
SHAL					
	_X_RECT - Rectangle	**250 -** 250 LPF	**SD -** SatinIce Diffuse	**27K -** 2700K	**80 -** 80 CRI
	_X_L - L-Shape	**500 -** 500 LPF	**Drop Lens w/ Lit Ends[3]**	**30K -** 3000K	**90 -** 90 CRI (R9 50 min)
	_X_X_U - U-Shape	**750 -** 750 LPF	**DLE05 -** 0.5"	**35K -** 3500K	
		1000 - 1000 LPF	**DLE10 -** 1.0"	**40K -** 4000K	
		XXX - Custom LPF		**50K -** 5000K	
				TW - Tunable White[4] (2700K-6500K)	

Finish[5]	Mounting	Circuiting	Remote Option[8]	Hyper Drive Circuit[9, 10]
		1C		
Standard Powder Coat	**Powered Canopy[6]**	**1C -** Single Circuit	**EX -** EM Battery Designated Fixture	**HDXX -** Hyper Drive Circuit
PW - White	**PCW -** Powered Canopy White			
PB - Black	**PCB -** Powered Canopy Black			
PS - Silver	**Canopy Recessed[7]**			
Premium	**CRW -** Canopy Recessed White			
RALXXXX - Powder Coat Gloss Finish	**CRB -** Canopy Recessed Black			
PSFX - Premium Stock Finish	**Canopy T-Grid[7]**			
Custom Powder Coat	**CTW -** Canopy T-Grid White			
PO - Powder Other	**CTB -** Canopy T-Grid Black			
	Canopy Surface[7]			
	CSW - Canopy Surface White			
	CSB - Canopy Surface Black			

Ordering Notes

1. Replace underscore (_) with fixture leg length. See page 10.
2. 200 LPF min. output / 1000 LPF max. output.
3. Seamless continuous lens unavailable for Drop Lens options.
4. Tunable White Driver must be specified in options.
5. See page 5 for standard and premium options.
6. 120-277V driver included.
7. Must be ordered with Hyper Drive Remote Driver.
8. Specify quantity in 'X'. (ex: 3 batteries = 'E3')
9. Not required with the Powered Canopy mounting.
10. See pages 3-4 for more information.

The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

Hyper Drive Remote Power System

Ordering Logic

HYPD-L8-NB-PW-U-DTZ-HD01

Series	Size & Quantity[1, 2, 3]	Optional Emergency Battery[4, 5]	Finish	Voltage
HYPD				U
	SX - 190W Small (2 max.)	**NB -** No EM Battery	**Standard Powder Coat**	**U -** 120-277V
	MX - 300W Medium (4 max.)	**#EMB6 -** 6W EM Battery (Provided by IOTA/Bodine)	**PW -** White	
	LX - 600W Large (8 max.)	**#EMB10 -** 10W EM Battery (Provided by IOTA/Bodine)	**PB -** Black	
		#FCEMB10 - 10W EM Battery (Factory Choice)	**Premium**	
			RALXXXX - Powder Coat Gloss Finish	

Options		Hyper Drive Circuit
Specialty Drivers[6, 7]	**Sensors**	**HDXX -** Hyper Drive Circuit
DT1 - eldoLED EcoDrive Dim to 1% (0-10V)	Consult factory	
DTZ - eldoLED SoloDrive Dim to 0.1% (0-10V)	**Others**	
PSRD - Philips Sensor Ready (DALI) Driver	**CP -** Chicago Plenum (CCEA)	
LDE1 - Lutron Hi-Lume EcoSystem LED Driver w/ Soft-on, Fade-to-Black	**RTS -** Remote Test Switch for Battery	
TW-A - Tunable White, 0-10V		
TW-EL - eldoLED DUALdrive Tunable White (DALI)		

Ordering Notes

1. Replace 'X' with driver quantity.
2. One driver is required per direct only fixture (8' maximum length).
3. Consult factory for custom configurations and drivers not listed.
4. Replace '#' with battery quantity.
5. Each emergency battery reduces the driver quantity of the Hyper Drive.
6. Standard driver is 0-10V, dim to 1% output current.
7. Consult factory for additional driver options.

Limitations


Reference chart for recommended maximum lengths of low voltage cable ran from Hyper Drive to fixture.

Wire Gauge (AWG)	18G	35'
	16G	60'
	14G	100'
	12G	150'

Configurations


M4 Configuration *(Shown without front cover)*

Each driver is provided with a terminal block on both input and output side for ease of wiring and installation.

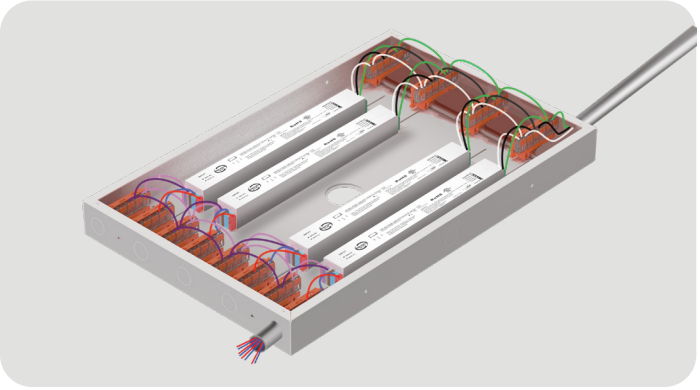

L8 Configuration *(Shown with front cover)*

Each driver is provided with a terminal block on both input and output side for ease of wiring and installation.

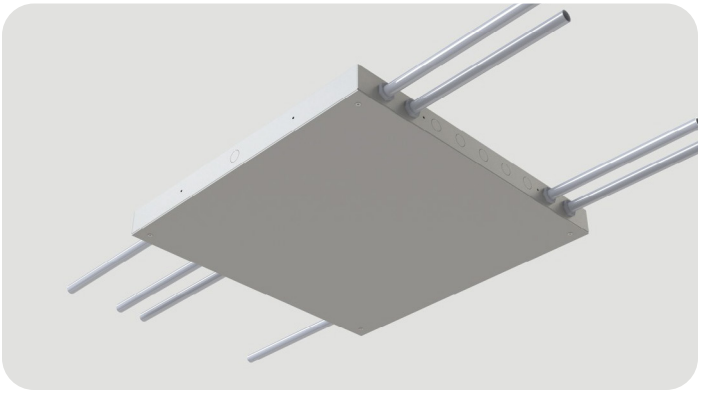


Hyper Drive Remote Power System

SX (Small Hyper Drive Remote Canopy)

190W / 2 Drivers Max.


Driver Form Factor	Linear
Input Rating	120-277V
Outputs	Up to 2 (190W max)
Max. Remote Distance	Up to 150' (45m)
Knockouts	0.5" (x6)
Battery	Available

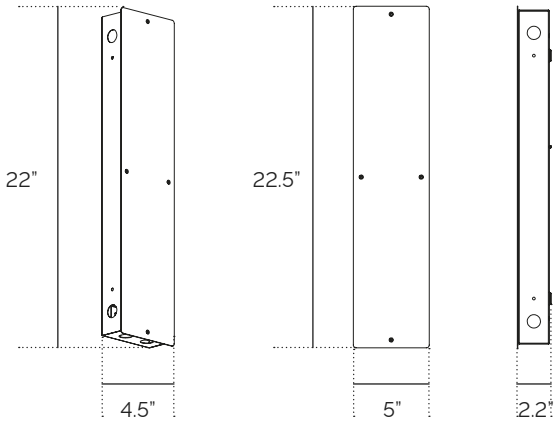

MX (Medium Hyper Drive Remote Canopy)

300W / 4 Drivers Max.


Driver Form Factor	Linear
Input Rating	120-277V
Outputs	Up to 4 (300W max)
Max. Remote Distance	Up to 150' (45m)
Knockouts	0.5" (x12)
Battery	Available

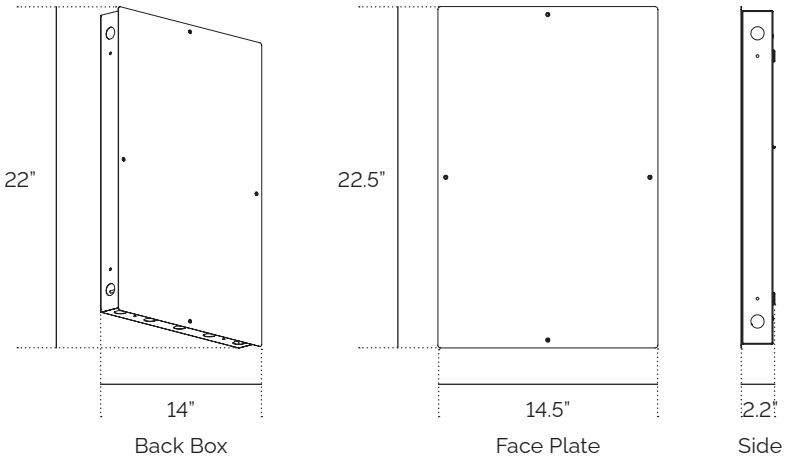

LX (Large Hyper Drive Remote Canopy)

600W / 8 Drivers Max.

Driver Form Factor	Linear
Input Rating	120-277V
Outputs	Up to 8 (600W max)
Max. Remote Distance	Up to 150' (45m)
Knockouts	0.5" (x20)
Battery	Available

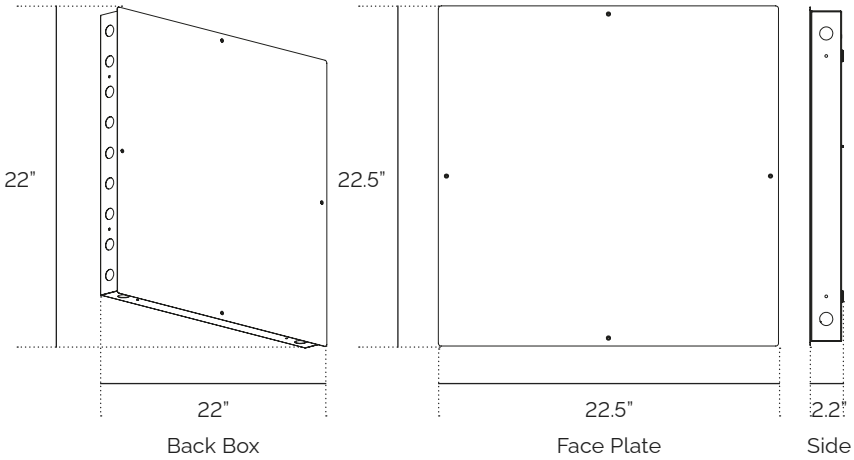


The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

Shallow Beam Shape Suspended

Direct


Dimensions

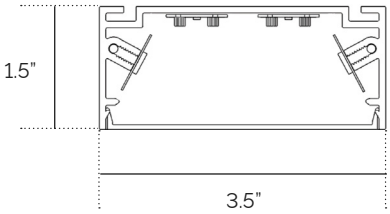

Diffusing



FL
Flush



DLE05
0.5" Height



DLE10
1.0" Height

Finishes

Standard



PW: White



PB: Black



PS: Silver

Premium Stock




PSF001: Wood 1




PSF002: Wood 2



PSF003: Wood 3




PSF004: Wood 4



PSF005: Wood 5



PSF006: Wood 6



PSF007: Stone 1



PSF008: Stone 2




PSF009: Stone 3

NOTE: A minimal impact to lead times will apply to products specified with Premium Stock Finishes (PSF). It is not to be assumed that these finishes are stocked in our warehouse, but rather, are readily available to us for your project.

All other custom finishes (PO) will incur a set up fee and will add an extended lead time to your project.


Distribution

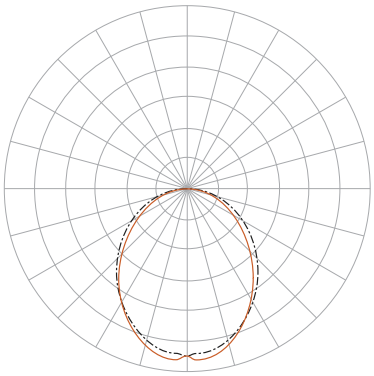

Direct: SatinIce Diffuse (SD)

Performance

SHAL-X-1000-SD (80+ CRI)

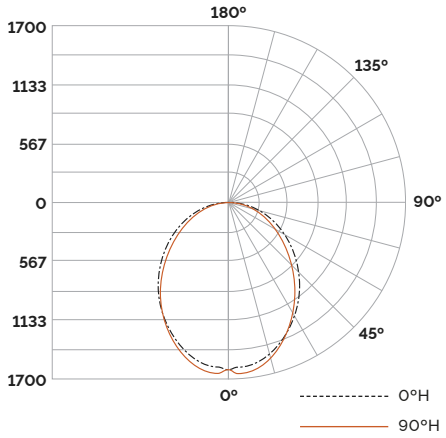

CCT	Length	Lumens	Wattage	LPW
2700K	4'	4000	45	88
	8'	8000	86	92
3000K	4'	4000	43	93
	8'	8000	82	97
3500K	4'	4000	40	98
	8'	8000	78	102
4000K	4'	4000	40	100
	8'	8000	76	104
5000K	4'	4000	39	101
	8'	8000	76	105

Luminance Data (cd/sq.m)

Angles	Avg. 0°	Avg. 45°	Avg. 90°
45	38908	37508	36548
55	37012	35568	34838
65	34443	32866	31959
75	31102	29125	26942
85	27230	23857	19189

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1227.4	28.3%
0-40	1984.3	45.8%
0-60	3435.2	79.3%
60-90	898.1	20.7%
70-100	382.5	8.8%
90-120	0	0%
0-90	4333.3	100%
90-180	0	0%
0-180	4333.3	100%

Candela Table


Vertical Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1615	1615	1615	1615	1615
5	1649	1617	1598	1589	1595
10	1626	1592	1573	1561	1565
15	1584	1549	1529	1515	1518
20	1524	1486	1470	1452	1453
25	1448	1413	1398	1377	1375
30	1361	1325	1312	1290	1285
35	1261	1227	1217	1194	1187
40	1152	1121	1113	1092	1086
45	1039	1008	1001	984	976
50	920	892	886	871	865
55	801	777	770	760	754
60	677	655	647	640	634
65	550	532	524	517	510
70	425	411	402	393	385
75	304	294	285	274	263
80	190	184	176	164	155
85	90	83	78	69	63
90	0	0	0	0	0

The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.


Mounting

2' - 6' Fixtures require one (1) Non-Feed Mount. Fixtures larger than 6' require two (2) Non-Feed Mount.

PCX (Powered Canopy with Included Driver)

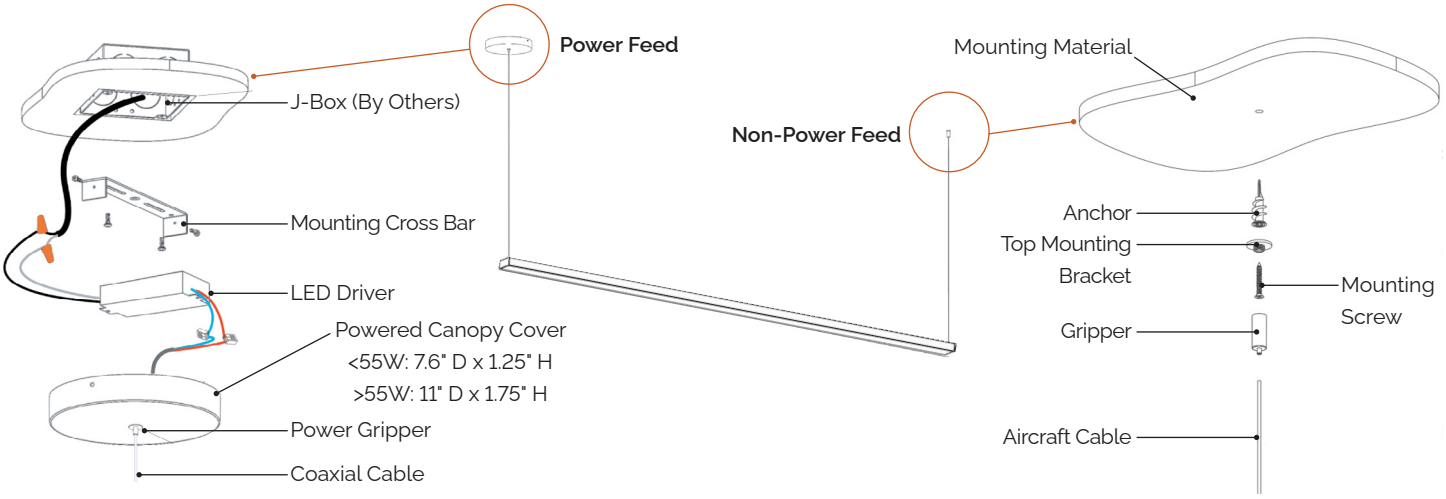

CRX (Canopy Recessed) Requires Hyper Drive

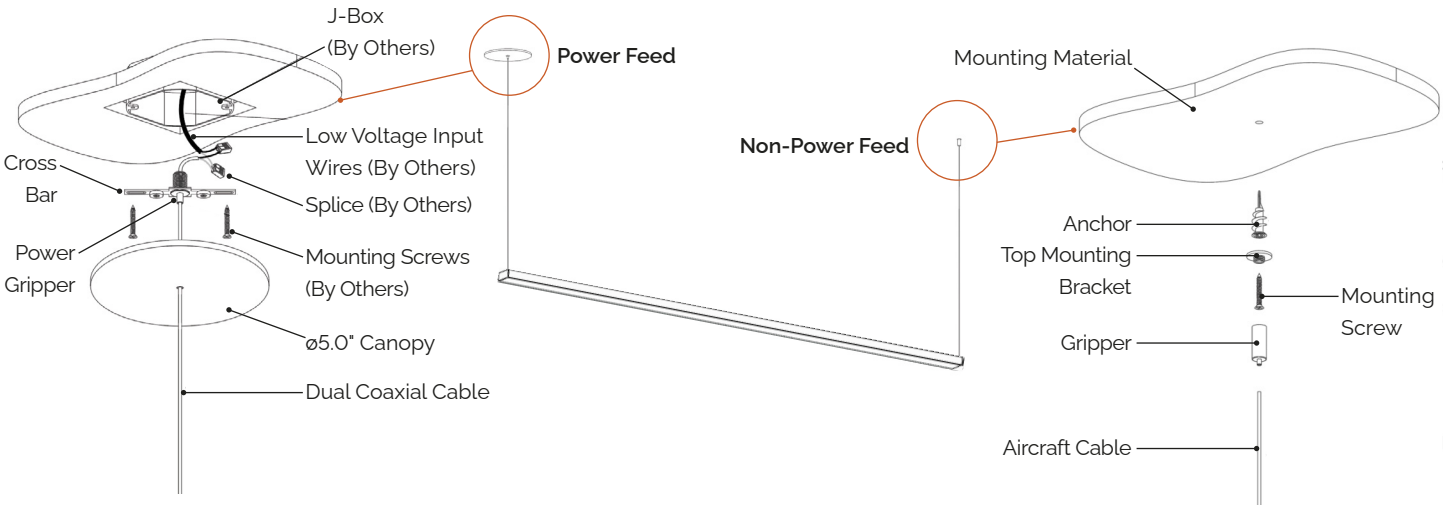


The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.


Mounting

2' - 6' Fixtures require one (1) Non-Feed Mount. Fixtures larger than 6' require two (2) Non-Feed Mount.

CTX (Canopy T-Grid) Requires Hyper Drive

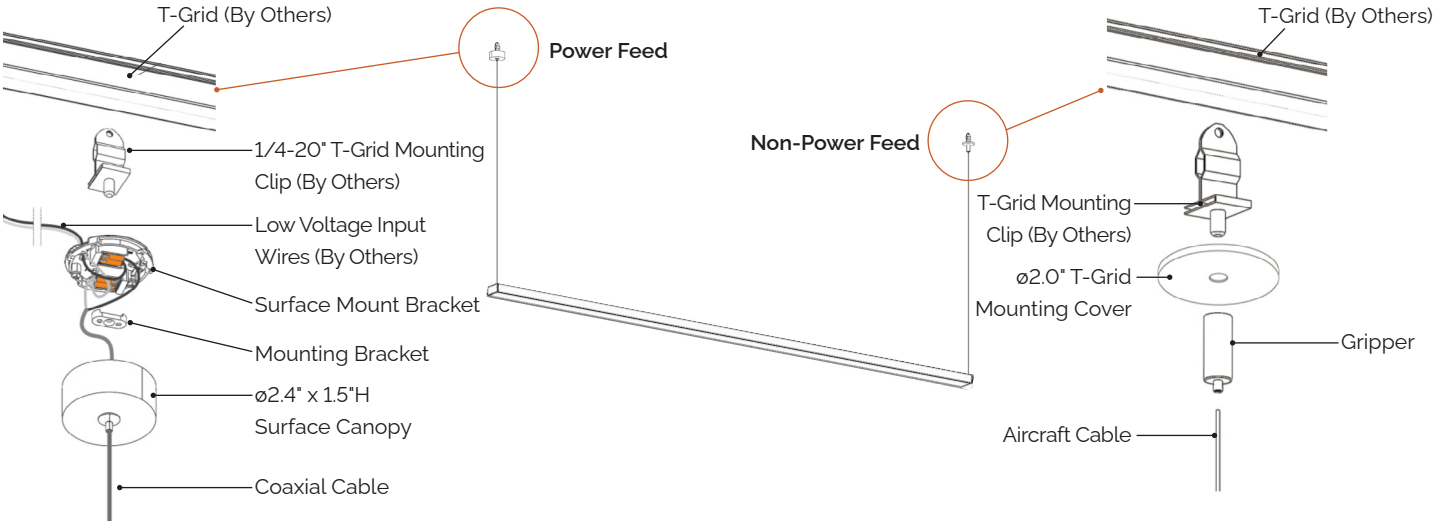


CSX (Canopy Surface) Requires Hyper Drive

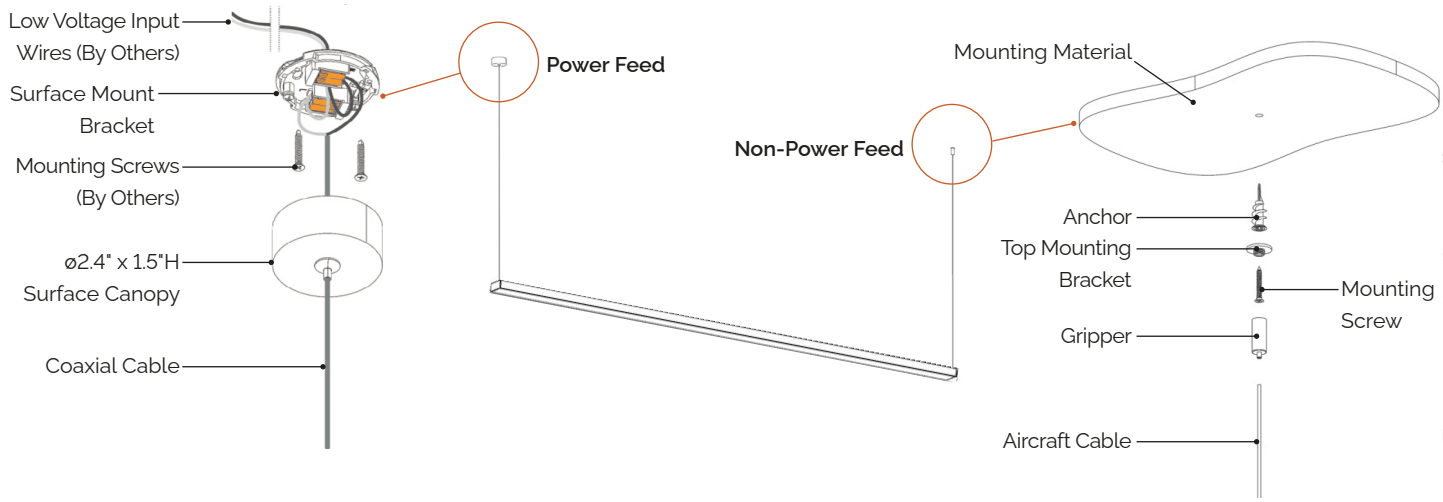

Shape Configuration


Joint Shape Configuration with Miter Cuts

Example: Standard stock 24" x 24" joint configurations are provided as shown below.

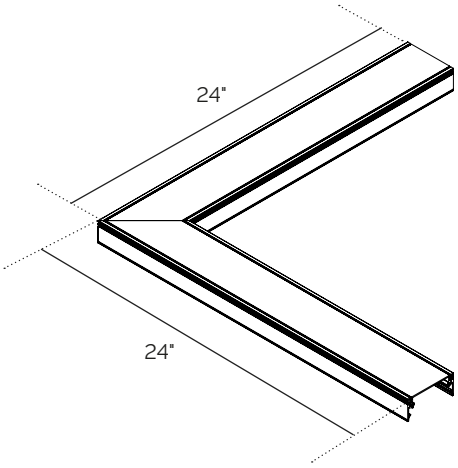


Rectangle (_X_RECT)

Provide AxB dimensions

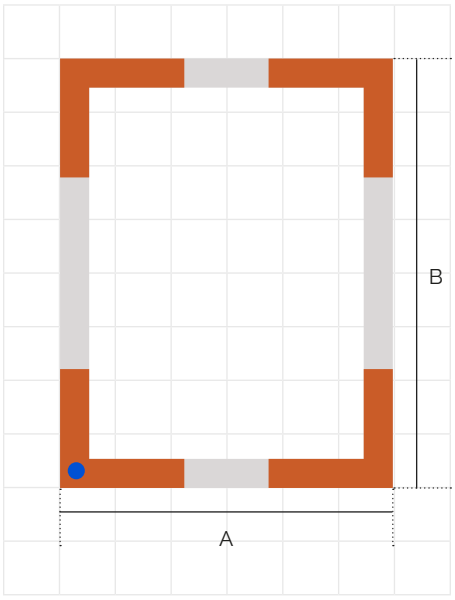


L-Shape (_X_L)

Provide AxB dimensions

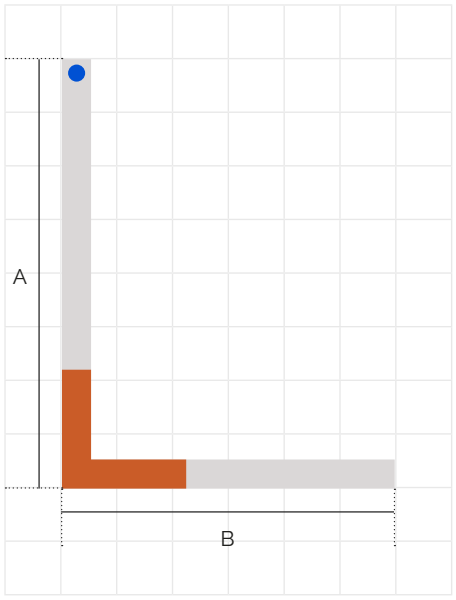

U-Shape (_X_X_U)

Provide AxBxC dimensions

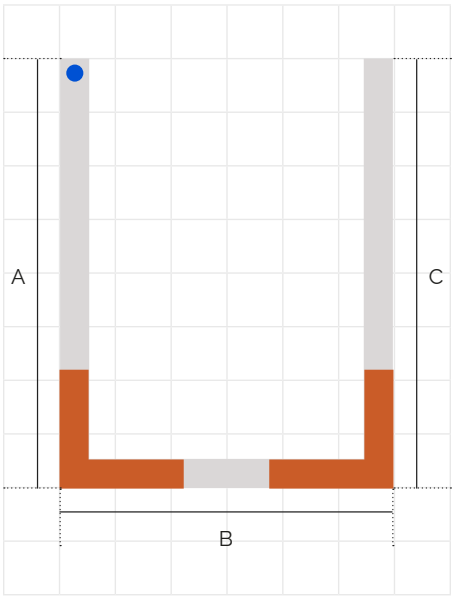

● Power Location

The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

Submit With Order

Bill of Materials Guide

How to use: Fill out the worksheet to specify your requirements for your configurations.
Be sure to call out battery and sensor locations.

Refer to the run chart for standard run configurations on linear lengths. Consult factory for custom configurations.
Use the order guide to create your BOM for you configuration.

Submit this worksheet along with your order.

Order Guide

Qty.	Type


Configuration

NOTE: Low voltage power transfer wire between fixture and Hyper Drive Remote Power System provided by others.

Example

Qty.	Type
1	SHAL-8X4RECT-750-SD-35K-90-PW-CRW-1C-HD01
1	SHAL-10X6L-750-SD-35K-90-PW-CRW-1C-HD01
1	SHAL-14X8X6U-750-SD-35K-90-PW-CRW-1C-E1-HD01
1	HYPD-M4-NB-PW-DTZ-HD01
1	HYPD-L7-1EMB6-PW-DTZ-HD02

Example Configuration

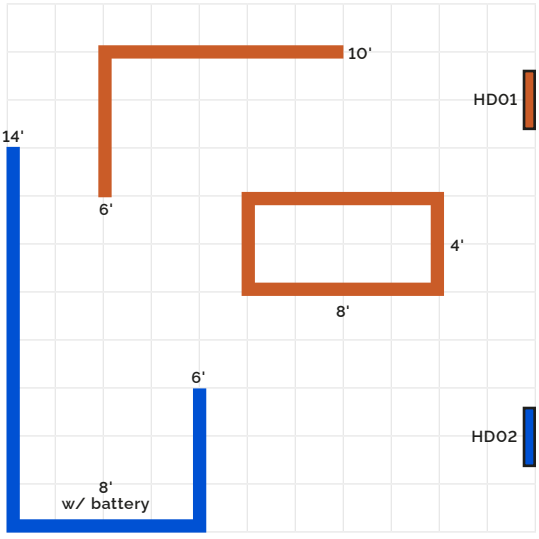

The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.