


Shallow Beam Shape Suspended Direct

Key Features

- Extruded aluminum single piece housing
- Soft diffuse direct lighting
- Continuous lensing standard – runs up to 100'
- Light levels can be factory set
- 0-10V dimming to 1% is standard

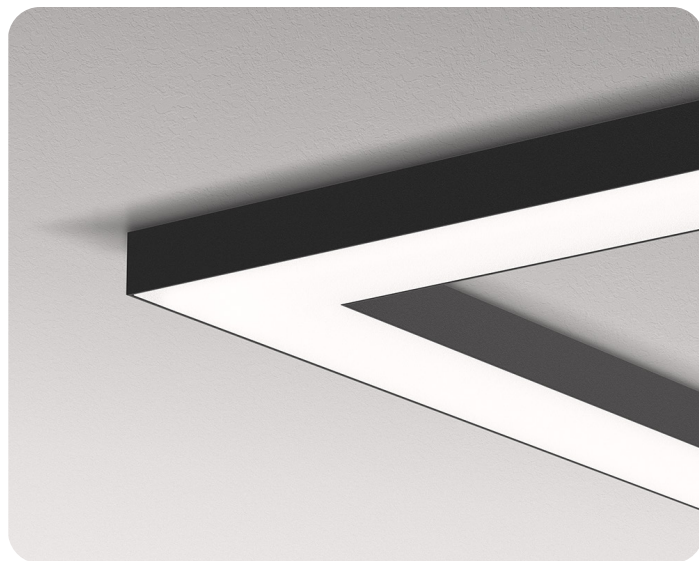

Specifications

Construction

- Continuous extruded 6063 T5 aluminum
- Mechanically attached end caps with no exposed fasteners enhance architectural aesthetic and prevent light leak.

Dimensions

- Nominal dimensions: 1.5" x 3.0"
- Nominal thickness: 0.06"

Finish

- Powder coated
- Colors: White, Black, Silver or Premium Finishes
- End Caps: Color-matched to housing
- Custom colors available. Consult factory for more information.

Luminaire Length

- Standard individual lengths: 2', 4', 6' or 8'
- Fixture and run lengths are available in 1/8" increments.
- Using internal joiners, sections can be joined to form longer, continuous rows.

Source

- CCT options: 2700K, 3000K, 3500K, 4000K, or 5000K
- All within 3 MacAdam ellipses
- 90 CRI (R9 50 min) available

Lensing

- 0.080" thick impact resistant acrylic lens
- Soft diffuse direct lighting

Operating Temperature

- -40°C to 50°C (-40°F to 122°F)

Lithium Ion Battery

- Provides up to 780 lm (6W) or up to 1300 lm (10W) for 90 minutes.
- Certifications: UL924 listed, Class 2 compliant, and Title 20 CEC (California Energy Commission) compliant

Dimming (Integral) Driver

- Constant current programmable LED driver
- Output current: 0-10V, dim to 1% (UL listed, Class P)
- Ring wave surge protection: 2.5KV ring
- Power factor: >0.90

Certifications

- Build America Buy America compliant
- Buy American Act compliant
- Intertek cETLus Listed
- DLC listed
- RoHS (Restriction of Hazardous Substances)
- JA8 compliant
- Suitable for dry and damp locations

Packaging

- Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Warranty

- 5-year limited warranty.

Ordering Logic

SHAL-4X6RECT-750-SD-35K-90-PW-CRW-1C-E1-HD01

Series	Length ¹	Direct Output ²	Direct Distribution	CCT	CRI
SHAL					
	_X_RECT - Rectangle	250 - 250 LPF	SD - SatinIce Diffuse	27K - 2700K	80 - 80 CRI
	_X_L - L-Shape	500 - 500 LPF	Drop Lens w/ Lit Ends³	30K - 3000K	90 - 90 CRI (R9 50 min)
	_X_X_U - U-Shape	750 - 750 LPF	DLE05 - 0.5"	35K - 3500K	
		1000 - 1000 LPF	DLE10 - 1.0"	40K - 4000K	
		XXX - Custom LPF		50K - 5000K	
				TW - Tunable White ⁴ (2700K-6500K)	
Finish ⁵	Mounting	Circuiting	Emergency	Remote Option ⁸	Hyper Drive Circuit ^{9, 10}
Standard Powder Coat	Powered Canopy⁶	1C - Single Circuit	BLANK - None	EX - EM Battery Designated Fixture	HDXX - Hyper Drive Circuit
PW - White	PCW - Powered Canopy White	MC - Multiple Circuits	EC - Emergency Circuit		
PB - Black	PCB - Powered Canopy Black				
PS - Silver	Canopy Recessed⁷				
Premium	CRW - Canopy Recessed White				
RALXXXX - Powder Coat Gloss Finish	CRB - Canopy Recessed Black				
PSFX - Premium Stock Finish	Canopy T-Grid⁷				
Custom Powder Coat	CTW - Canopy T-Grid White				
PO - Powder Other	CTB - Canopy T-Grid Black				
	Canopy Surface⁷				
	CSW - Canopy Surface White				
	CSB - Canopy Surface Black				

Ordering Notes

1. Replace underscore (_) with fixture leg length. See page 10.
2. 200 LPF min. output / 1500 LPF max. output.
3. Seamless continuous lens unavailable for Drop Lens options.
4. Tunable White Driver must be specified in options.
5. See page 5 for standard and premium options.
6. 120-277V driver included. 50W max. dual driver required.
7. Must be ordered with Hyper Drive Remote Driver.
8. Specify quantity in 'X'. (ex: 3 batteries = 'E3')
9. Not required with the Powered Canopy mounting.
10. See pages 3-4 for more information.

Hyper Drive Remote Power System

Ordering Logic

HYPD-L8-NB-PW-U-DTZ-HD01

Series	Size & Quantity ^{1, 2, 3}	Optional Emergency Battery ^{4, 5}	Finish	Voltage
HYPD				U
	SX - 190W Small (2 max.)	NB - No EM Battery	Standard Powder Coat	U - 120-277V
	MX - 300W Medium (4 max.)	#EMB6 - 6W EM Battery (Provided by IOTA/Bodine)	PW - White	
	LX - 600W Large (8 max.)	#EMB10 - 10W EM Battery (Provided by IOTA/Bodine)	PB - Black	
		#FCEMB10 - 10W EM Battery (Factory Choice)	Premium	
			RALXXXX - Powder Coat Gloss Finish	

Options	Hyper Drive Circuit
Specialty Drivers^{6, 7} DT1 - eldoLED EcoDrive Dim to 1% (0-10V) DTZ - eldoLED SoloDrive Dim to 0.1% (0-10V) PSRD - Philips Sensor Ready (DALI) Driver LDE1 - Lutron Hi-Lume EcoSystem LED Driver w/ Soft-on, Fade-to-Black TW-A - Tunable White, 0-10V TW-EL - eldoLED DUALdrive Tunable White (DALI)	Sensors Consult factory Others CP - Chicago Plenum (CCEA) RTS - Remote Test Switch for Battery
	HDXX - Hyper Drive Circuit

Ordering Notes

1. Replace 'X' with driver quantity.
2. One driver is required per direct only fixture (8' maximum length).
3. Consult factory for custom configurations and drivers not listed.
4. Replace '#' with battery quantity.

5. Each emergency battery reduces the driver quantity of the Hyper Drive.
6. Standard driver is 0-10V, dim to 1% output current.
7. Consult factory for additional driver options.

Limitations


Reference chart for recommended maximum lengths of low voltage cable ran from Hyper Drive to fixture.

Wire Gauge (AWG)	18G	35'
	16G	60'
	14G	100'
	12G	150'

Configurations


M4 Configuration (Shown without front cover)

Each driver is provided with a terminal block on both input and output side for ease of wiring and installation.

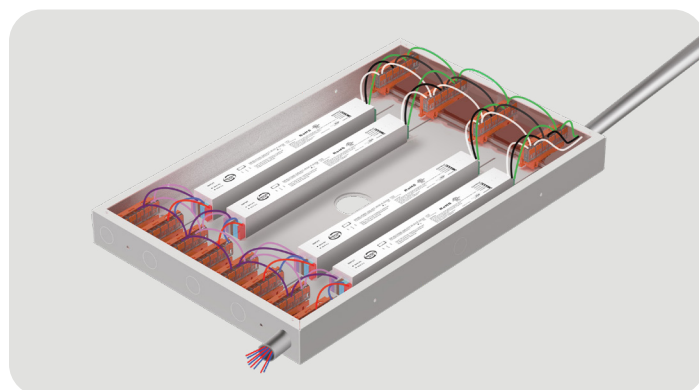

L8 Configuration (Shown with front cover)

Each driver is provided with a terminal block on both input and output side for ease of wiring and installation.

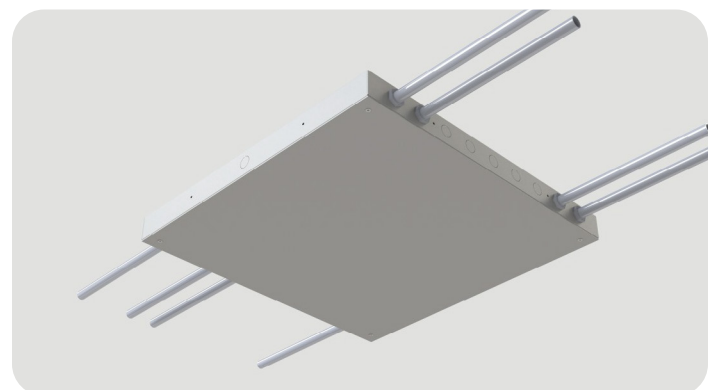


Hyper Drive Remote Power System

SX (Small Hyper Drive Remote Canopy)

190W / 2 Drivers Max.


Driver Form Factor	Linear
Input Rating	120-277V
Outputs	Up to 2 (190W max)
Max. Remote Distance	Up to 150' (45m)
Knockouts	0.5" (x6)
Battery	Available

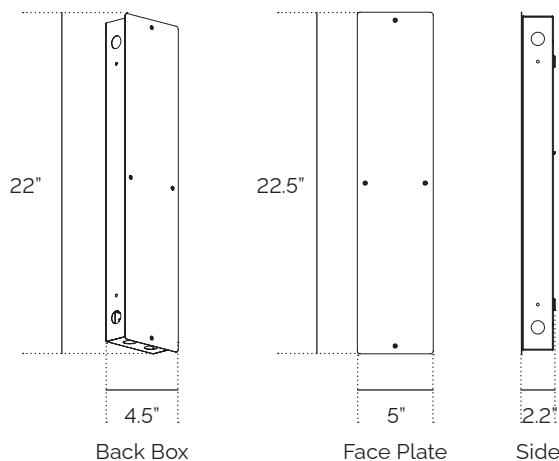

MX (Medium Hyper Drive Remote Canopy)

300W / 4 Drivers Max.


Driver Form Factor	Linear
Input Rating	120-277V
Outputs	Up to 4 (300W max)
Max. Remote Distance	Up to 150' (45m)
Knockouts	0.5" (x12)
Battery	Available

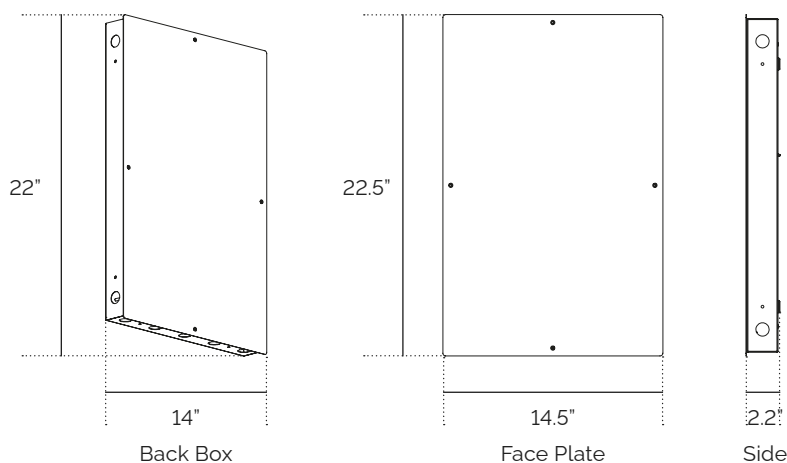


LX (Large Hyper Drive Remote Canopy)

600W / 8 Drivers Max.

Driver Form Factor	Linear
Input Rating	120-277V
Outputs	Up to 8 (600W max)
Max. Remote Distance	Up to 150' (45m)
Knockouts	0.5" (x20)
Battery	Available

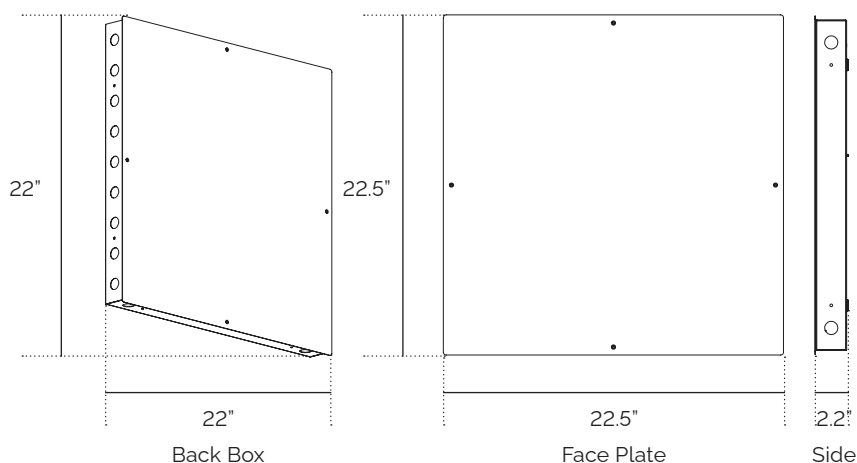

Dimensions

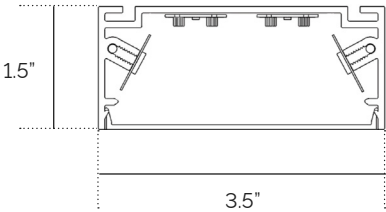

Diffusing



Finishes

Standard



PW: White



PB: Black



PS: Silver

Premium Stock




PSF001: Wood 1




PSF002: Wood 2



PSF003: Wood 3




PSF004: Wood 4



PSF005: Wood 5



PSF006: Wood 6



PSF007: Stone 1



PSF008: Stone 2




PSF009: Stone 3

NOTE: A minimal impact to lead times will apply to products specified with Premium Stock Finishes (PSF). It is not to be assumed that these finishes are stocked in our warehouse, but rather, are readily available to us for your project.

All other custom finishes (PO) will incur a set up fee and will add an extended lead time to your project.


Distribution

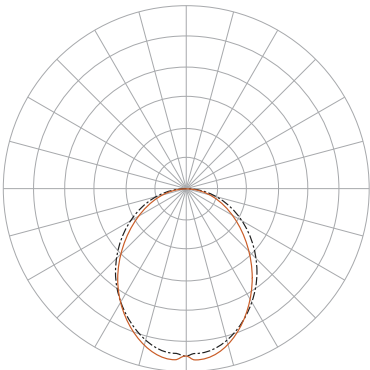

Direct: SatinIce Diffuse (SD)

Performance

SHAL-X-1000-SD (80+ CRI)

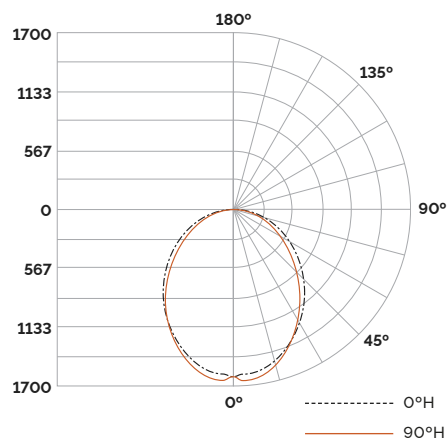

Luminance Data (cd/sq.m)

Angles	Avg. 0°	Avg. 45°	Avg. 90°
45	38908	37508	36548
55	37012	35568	34838
65	34443	32866	31959
75	31102	29125	26942
85	27230	23857	19189

CCT	Length	Lumens	Wattage	LPW
2700K	4'	4000	45	88
	8'	8000	86	92
3000K	4'	4000	43	93
	8'	8000	82	97
3500K	4'	4000	40	98
	8'	8000	78	102
4000K	4'	4000	40	100
	8'	8000	76	104
5000K	4'	4000	39	101
	8'	8000	76	105

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1227.4	28.3%
0-40	1984.3	45.8%
0-60	3435.2	79.3%
60-90	898.1	20.7%
70-100	382.5	8.8%
90-120	0	0%
0-90	4333.3	100%
90-180	0	0%
0-180	4333.3	100%

Candela Table

Vertical Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1615	1615	1615	1615	1615
5	1649	1617	1598	1589	1595
10	1626	1592	1573	1561	1565
15	1584	1549	1529	1515	1518
20	1524	1486	1470	1452	1453
25	1448	1413	1398	1377	1375
30	1361	1325	1312	1290	1285
35	1261	1227	1217	1194	1187
40	1152	1121	1113	1092	1086
45	1039	1008	1001	984	976
50	920	892	886	871	865
55	801	777	770	760	754
60	677	655	647	640	634
65	550	532	524	517	510
70	425	411	402	393	385
75	304	294	285	274	263
80	190	184	176	164	155
85	90	83	78	69	63
90	0	0	0	0	0

Row Configurations

XX (Run Length)

The standard construction of run lengths follows the logic of the table below. Consult factory for additional information. Run lengths always start with the longest fixture and receives the power feed.

NOTE: Fixtures in continuous runs are available in 6" increments. Consult factory for smaller increments.

Total Length (Feet)	# of Sections						
	2	3	4	5	6	7	8
2	1						
3		1					
4			1				
5				1			
6					1		
7						1	
8							1
9			1	1			
10			1		1		
11		1					1
12			1				1
13				1			1
14					1		1
15						1	1
16							2
17			1	1			1
18			1		1		1
19		1					2
20			1				2
21				1			2
22					1		2
23						1	2
24							3
25			1	1			2
26			1		1		2
27		1					3
28			1				3
29				1			3
30					1		3
31						1	3
32							4
33			1	1			3
34			1		1		3
35		1					4
36			1				4
37				1			4
38					1		4
39						1	4
40							5

SXX (Symmetric Run)


The construction of SXX (y') is to build with equal length fixtures. The xx indicates the run length. The y' indicates the fixture length used to create the run. Please indicate this on your P.O. when placing your order.

S12' (2')	2'	2'	2'	2'	2'	2'
S12' (3')	3'	3'	3'	3'		
S12' (4')	4'	4'	4'			
S12' (6')	6'	6'				


Mounting

2' - 6' Fixtures require one (1) Non-Feed Mount. Fixtures larger than 6' require two (2) Non-Feed Mount.

PCX (Powered Canopy with Included Driver)

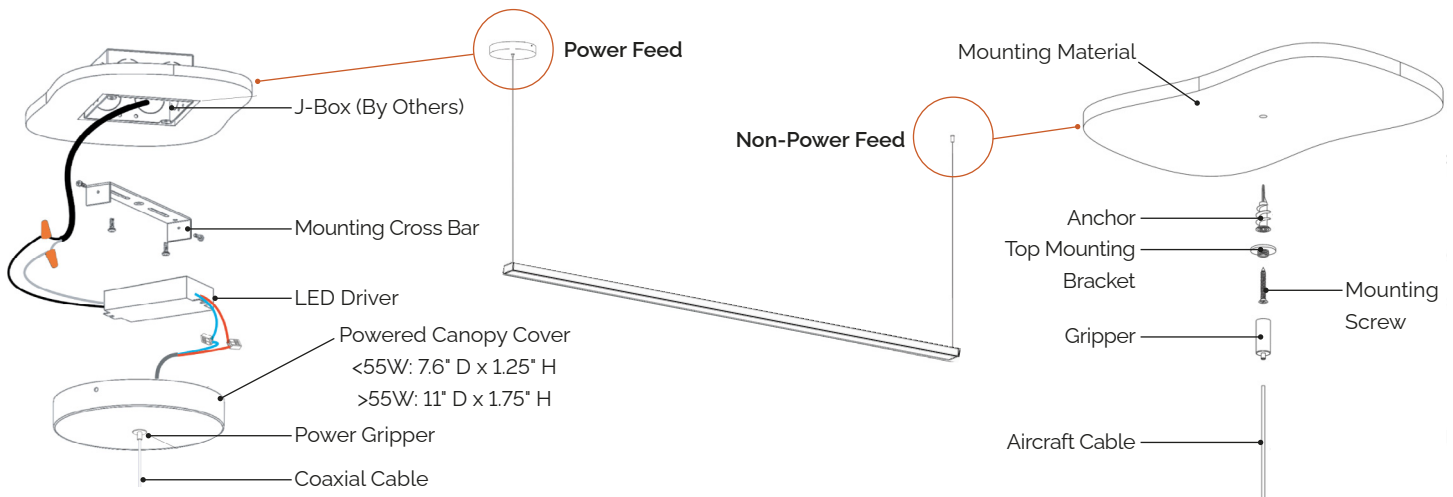


CRX (Canopy Recessed) Requires Hyper Drive

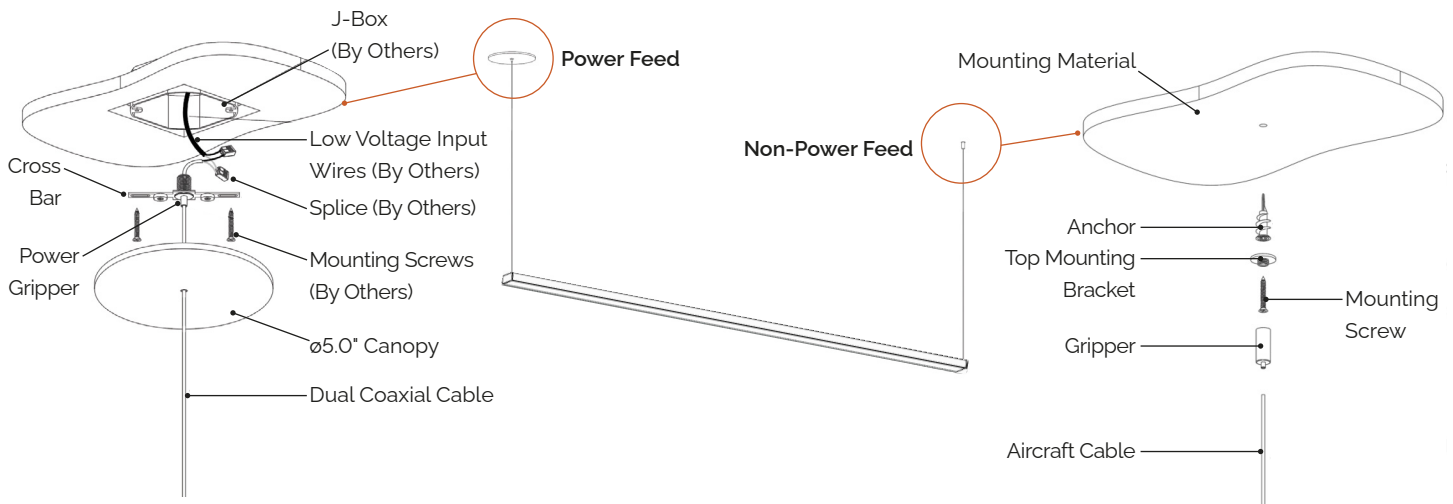


Mounting

2' - 6' Fixtures require one (1) Non-Food Mount. Fixtures larger than 6' require two (2) Non-Food Mount.

CTX (Canopy T-Grid) Requires Hyper Drive

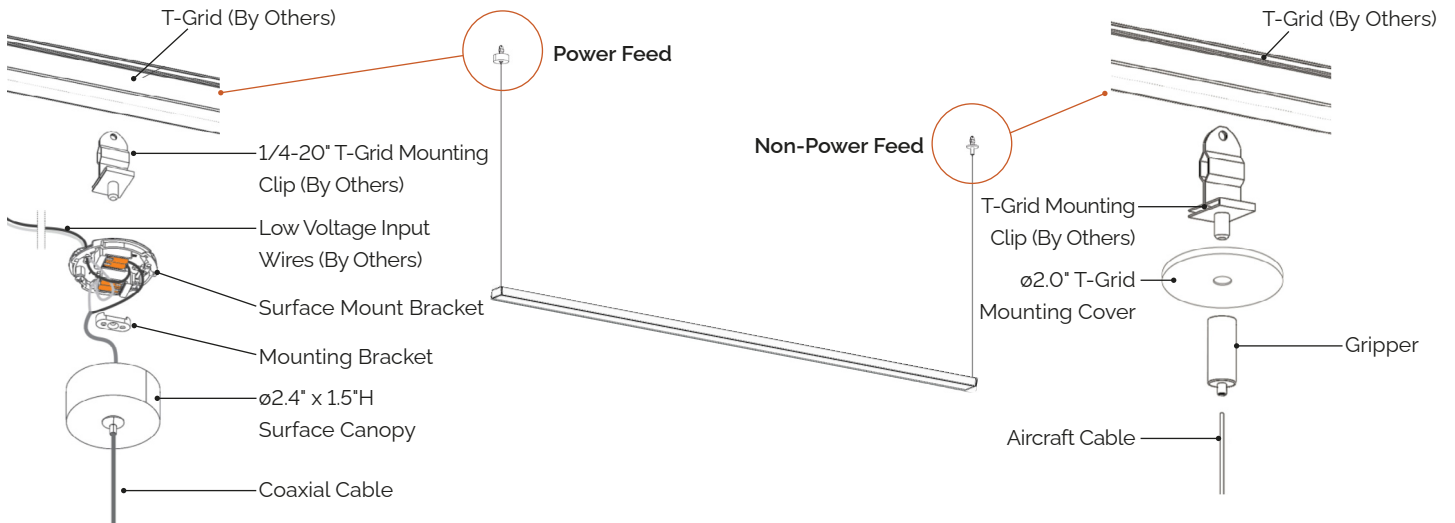


CSX (Canopy Surface) Requires Hyper Drive

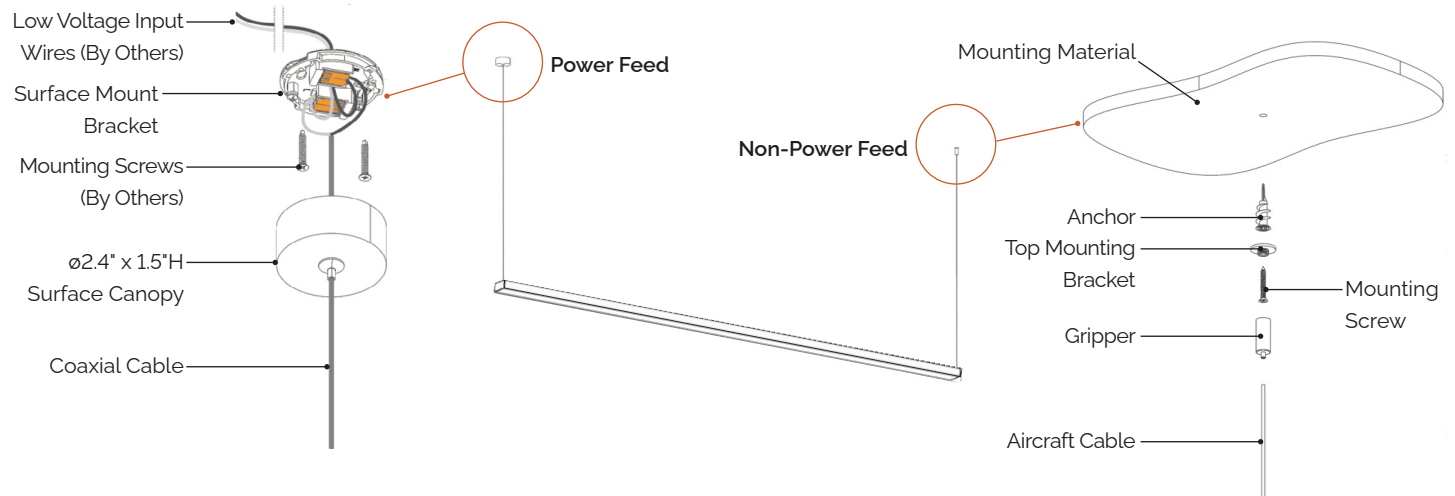

Shape Configuration


Joint Shape Configuration with Miter Cuts

Example: Standard stock 24" x 24" joint configurations are provided as shown below.

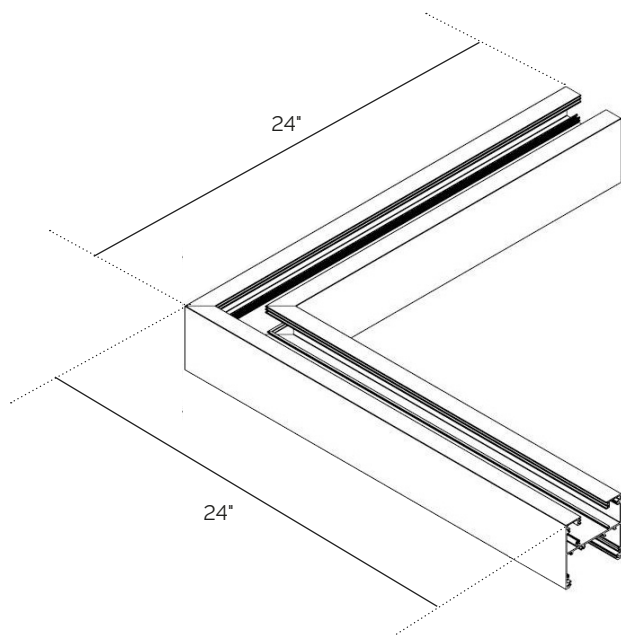


Rectangle (_X_RECT)

Provide AxB dimensions

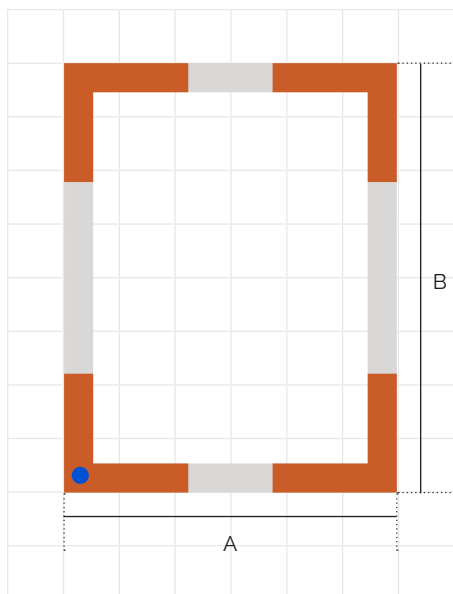


L-Shape (_X_L)

Provide AxB dimensions

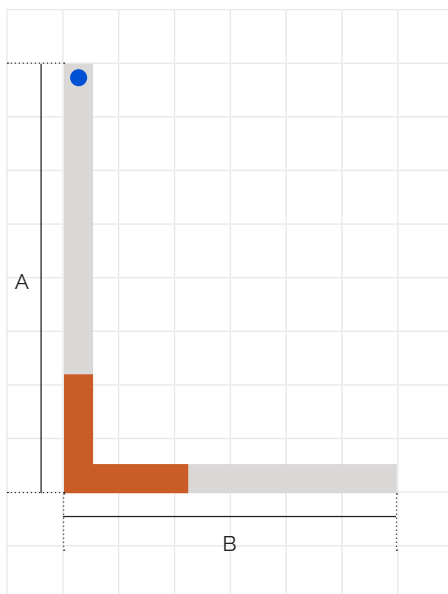

U-Shape (_X_X_U)

Provide AxBxC dimensions

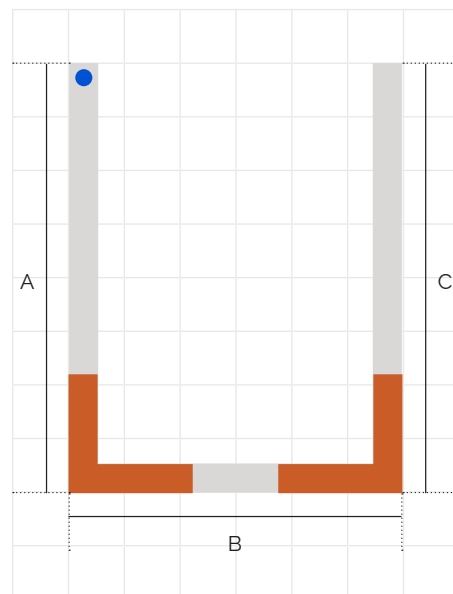

● Power Location



Submit With Order

Bill of Materials Guide

How to use: Fill out the worksheet to specify your requirements for your configurations.
Be sure to call out battery and sensor locations.


Refer to the run chart for standard run configurations on linear lengths. Consult factory for custom configurations.
Use the order guide to create your BOM for you configuration.

Submit this worksheet along with your order.

Order Guide

Qty.	Type	

Configuration

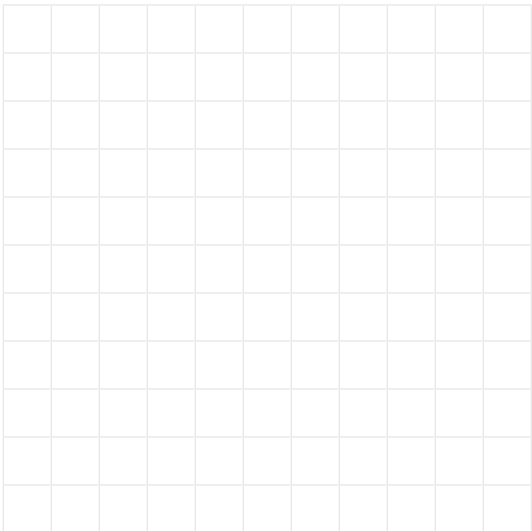

NOTE: Low voltage power transfer wire between fixture and Hyper Drive Remote Power System provided by others.

Example

Qty.	Type	
3	MBEAMDI-8-750-750-SD-SD-35K-80-PW-CSW-HD01	
1	MBEAMDI-6-750-750-SD-SD-35K-80-PW-CSW-HD01	
1	MBEAMDI-2-750-750-SD-SD-35K-80-PW-CSW-HD01	
1	MBEAMDI-6-750-750-SD-SD-35K-80-PW-CSW-E1-HD02	
1	HYPD-L8-NB-R-PW-DTZ-HD01	
1	HYPD-L6-1EMB6-R-PW-DTZ-HD01	

Example Configuration

