STARTEK
ARCHITECTURAL LIGHTING

Rep/Agent		Type	
Project			
Order No.		Date	

Starpower Wide Surface



Key Features

- Extruded aluminum housing
- Soft diffuse direct lighting
- Available in 4' and 8' individual fixture lengths
- Two standard lumen packages
- 0-10V dimming to 1% is standard
- Efficacy up to 155 lm/W

5 Year Warranty · BABA Compliant · BAA Compliant · Intertek · RoHS Compliant

Specifications

Construction

- Continuous extruded 6063 T5 aluminum

Dimensions

- Nominal dimensions: 2.9" x 3.0"

Finish

- Colors: Clear or Black anodized finishes
- End Caps: Color-matched to housing
- Custom colors available. Consult factory for more information.

Luminaire Length

- Standard individual lengths: 4' and 8'

Source

- CCT: 3000K, 3500K, 4000K, or 5000K
- All within 3 MacAdam ellipses
- 90 CRI (R9 50 min) available

Operating Temperature

- -40°C to 50°C (-40°F to 122°F)

Lithium Ion Battery

- Provides up to 780 lm (6W) or up to 1300 lm (10W) for 90 minutes.
- Certifications: UL924 listed, Class 2 compliant, and Title 20 CEC (California Energy Commission) compliant

Dimming Driver

- Constant current programmable LED driver
- Output current: 0-10V, dim to 1% (UL listed, Class P)
- Surge protection: 2.5KV ring and wave
- Power factor: >0.93

Certifications

- Build America Buy America compliant
- Buy American Act compliant
- Intertek cETLus Listed
- DLC listed
- RoHS (Restriction of Hazardous Substances)
- JA8 compliant
- Suitable for dry and damp locations

Packaging

- Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Warranty


- 5-year limited warranty.

Finishes

Standard

CA: Clear Anodize

Distribution

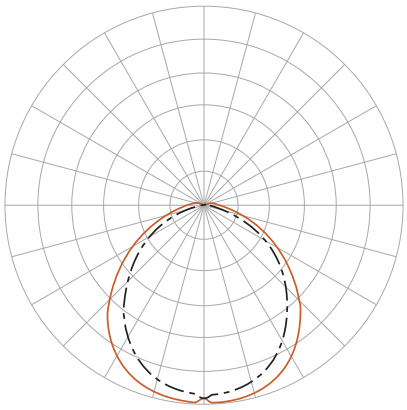

Direct: SatinIce Diffuse (SD)

STARTEK Architectural Lighting
899 E. Park Avenue, Libertyville, Illinois 60048
877-782-7835

The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

Ordering Logic

SPW-4-L-SD-35K-CA-SMW-U-1EMB10


Series	Length	Direct Output[1]	Direct Distribution	CCT	CRI
SPW			SD		
	4 - 4'	**L -** Low	**SD -** SatinIce Diffuse	**30K -** 3000K	**80 -** 80 CRI
	8 - 8'	**M -** Medium		**35K -** 3500K	**90 -** 90 CRI (R9 50 Min)
		H - High		**40K -** 4000K	
		XXX - Custom LPF		**50K -** 5000K	

Finish	Mounting	Voltage	Options	
Standard[2]	**Surface Mount**	**U -** 120-277V	**Specialty Drivers[3]**	**Battery**
CA - Clear Anodize	**SMW -** 10' White Cord	**C -** 347V	**DT1 -** eldoLED EcoDrive Dim to 1% (0-10V)	**#EMB6 -** 6W EM Battery[4, 5]
Custom Powder Coat	**SMB -** 10' White Cord		**DTZ -** eldoLED SoloDrive Dim to 0.1% (0-10V)	**#EMB10 -** 10W EM Battery[4, 5]
PO - Powder Other	**Rotational Mount**		**PSRD -** Philips Sensor Ready (DALI) Driver	**Other**
	RMW - 10' White Cord		**LDE1 -** Lutron Hi-Lume EcoSystem LED Driver w/ Soft-on, Fade-to-Black	**CFT -** Conduit Feed Through[6]
	RMB - 10' Black Cord		**Sensors**	
			DM - Daylight/Motion Sensor	

Ordering Notes

1. 200 LPF minimum output.
2. See page 1 for standard option.
3. Standard driver is 0-10V, dim to 1% output current.
4. '#' indicates number per run.
5. Provided by Iota/Bodine.
6. See page 3 for Conduit Feed Through information.

Dimensions



Nominal Length	Luminaire Length	Raceway Length	Weight
4'	48"	45.6"	8 lbs
8'	96"	93.6"	16 lbs

Lumen Packages

Output	Length	Lumens	Input Wattage	LPW
Low	8'	12540	87	144
Medium	8'	19130	132	144
High	8'	25080	174	144

NOTE: Based on 3500K CCT. Other CCT available.

Wattage Multiplier

CRI	CCT	4' Length	8' Length
80 CRI	3000K	1.11	1.05
	3500K	1.05	1.00
	4000K	1.03	0.98
	5000K	1.02	0.97
90 CRI	3000K	1.17	1.11
	3500K	1.11	1.05
	4000K	1.08	1.03
	5000K	1.07	1.02

Multiplier How-To


To determine CRI/CCT configuration wattage:
Choose wattage from Power matrix for desired optic and lumen output for 8' fixture length.

Wattage x Multiplier = New Configuration Wattage


The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

Mounting

SMX (Surface Mount)

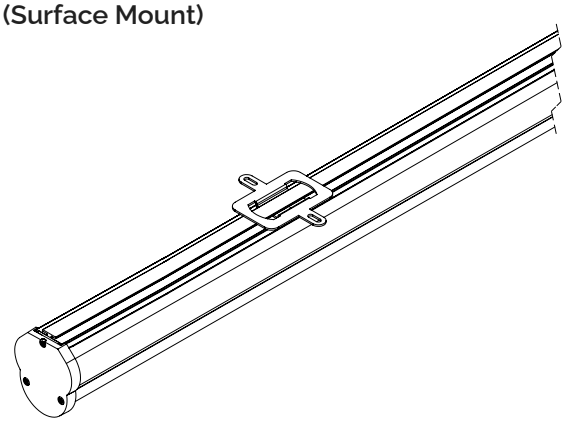

RMX (Rotational Mount)

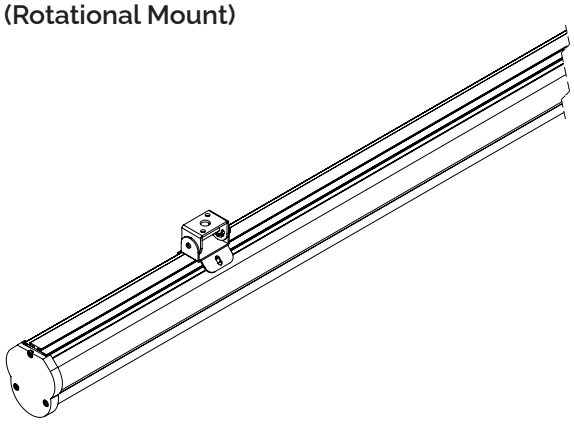

Surface Mount Options

When fixtures are ordered with the Surface Mount (SM) option, the fixture will manufactured with an end plate that has an opening for a 1/2" connector on the feed end, and a full end cap on the other end.



If the Conduit Feed Through (CFT) is specified, the fixture will be manufactured with an additional end plate that has an opening for a 1/2" connector on the opposite end of the fixture. Thru wires will be provided from one end of the fixture to the other. Conduit can then be run to another fixture.



NOTE: The Conduit Feed Through (CFT) option should not be used to link fixtures together in continuous lengths over 4' or 8'. For that application, the StarLink series should be used.