
STARTEK
ARCHITECTURAL LIGHTING

Rep/Agent		Type	
Project			
Order No.		Date	

Slim Beam Hub
Suspended
Direct / Indirect

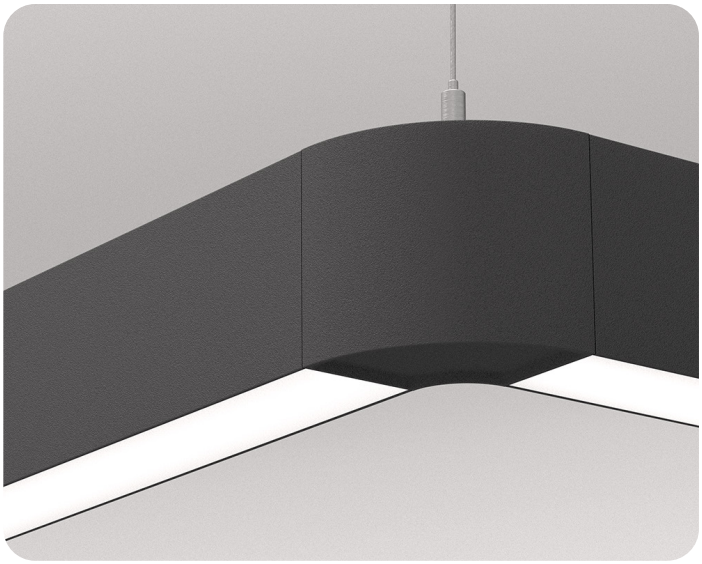

Key Features

- Extruded aluminum single piece housing
- Continuous lensing standard – runs up to 100'
- Any direct and indirect light combinations can be factory set
- 0-10V dimming to 1% is standard
- Efficacy up to 140 lm/W
- Consult factory for TM21, TM30, LM79 and LM80

5 Year Warranty · BABA Compliant · BAA Compliant · Intertek · RoHS Compliant · Declare.

Specifications

Construction

- Continuous extruded 6063 T5 aluminum
- Mechanically attached end caps with no exposed fasteners enhance architectural aesthetic and prevent light leak.

Dimensions

- Nominal dimensions: 2.1" x 3.5"
- Nominal thickness: 0.075"

Finish

- Powder coated
- Colors: White, Black, Silver or Premium Finishes
- End Caps: Color-matched to housing
- Custom colors available. Consult factory for more information.

Luminaire Length

- Standard individual lengths: 2', 4', 6' or 8'
- Fixture and run lengths are available in $\frac{1}{16}$" increments.
- Using internal joiners, sections can be joined to form longer, continuous rows.

Source

- CCT options: 2700K, 3000K, 3500K, 4000K, or 5000K
- All within 3 MacAdam ellipses
- 90 CRI (R9 50 min) available

Lensing

- 0.060" thick impact resistant acrylic lens
- Soft diffuse direct lighting

Operating Temperature

- -40°C to 50°C (-40°F to 122°F)

Lithium Ion Battery

- Provides up to 780 lm (6W) or up to 1300 lm (10W) for 90 minutes.
- Certifications: UL924 listed, Class 2 compliant, and Title 20 CEC (California Energy Commission) compliant

Dimming (Integral) Driver

- Constant current programmable LED driver
- Output current: 0-10V, dim to 1% (UL listed, Class P)
- Ring wave surge protection: 2.5KV ring
- Power factor: >0.90

Generator Transfer Device

- Luminaires with GTD option provides a UL924 shunt relay to bypass normal power, switches, and 0–10V dimming.

Certifications

- Build America Buy America compliant
- Buy American Act compliant
- Intertek cETLus Listed
- RoHS (Restriction of Hazardous Substances)
- JA8 compliant
- Suitable for dry and damp locations

Packaging

- Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Warranty

- 5-year limited warranty.

Ordering Logic

SLIMDIH-13-500-500-SD-BW-30K-90-PW-ACW05-U-1C-S

Series	Length	Direct Output[1]	Indirect Output[1]	Direct Distribution	Indirect Distribution
SLIMDIH					
	XX - Run Length	**250 -** 250 LPF	**250 -** 250 LPF	**SD -** SatinIce Diffuse	**CL -** Clear Lens
		500 - 500 LPF	**500 -** 500 LPF	**WD -** Wide Diffuse	**BW -** Batwing
		750 - 750 LPF	**750 -** 750 LPF	**WW -** Wall Wash	
		1000 - 1000 LPF	**1000 -** 1000 LPF		
		XXX - Custom LPF	**XXX -** Custom LPF		

CCT	CRI	Finish[2]	Mounting	Voltage	Circuiting
27K - 2700K	**80 -** 80 CRI	**Standard Powder Coat**	**Cables w/ Canopy Kits**	**U -** 120-277V	**1C -** Single Circuit
30K - 3000K	**90 -** 90 CRI (R9 50 min)	**PW -** White	**ACW05 -** 5' White Cord	**C -** 347V	**2C -** Separate D/I Circuits[3]
35K - 3500K		**PB -** Black	**ACW10 -** 10' White Cord		**MC -** Multiple Circuits[4, 5]
40K - 4000K		**PS -** Silver	**ACB05 -** 5' Black Cord		**DL -** Daylight Control[4, 6]
50K - 5000K		**Premium**	**ACB10 -** 10' Black Cord		**NL -** Night Lights[4, 7]
		RALXXXX - Powder Coat Gloss Finish	**Cables w/ Loops**		
		PSFX - Premium Stock Finish	**ALW10 -** 10' White Cord		
		Custom Powder Coat	**ALB10 -** 10' Black Cord		
		PO - Powder Other			

Emergency	Fixture Type	Options
BLANK - None	**S -** Start	**Sensors**
EC - Emergency Circuit[8]	**M -** Middle	**DMXX% -** Daylight/Motion Sensor (XX%=% Min. Dimming)
#EMB6 - 6W EM Battery[9, 10]	**E -** End	**VDO -** Lutron Vive Integral Fixture Control (RF w/ Daylight and Occupancy)
#EMB10 - 10W EM Battery[9, 10]		**AWNR -** Lutron Athena Wireless Node (RF Only)[13]
#FCEMB10 - 10W EM Battery[9, 11]		**AWNS -** Lutron Athena Wireless Node w/ Sensor[13]
#FCEMB14 - 14W EM Battery[9, 11]		**NLA -** Acuity nLight Air[14]
#GTD - Generator Transfer Device w/ ALCR[12]		**NLW -** Acuity nLight Wired[14]
		WVL - Cooper Wavelinx[14]

Ordering Notes

1. 200 LPF min. output / 1500 LPF max. output.
2. See page 3 for standard and premium options.
3. Separate D/I switched power and dimming (shared neutral).
4. Customer to specify number of zones and locations through factory submittal drawings.
5. Multiple low and line control zones.
6. Multiple low voltage control zones for daylight control.
7. Multiple unswitched wires for night light control zones.
8. Separate power, transfer devices provided by others.
9. '#' indicates number per run.
10. Provided by Iota/Bodine.
11. EM battery is factory choice.
12. Iota EDS-DR Emergency Control Device
13. Athena sensor matches finish for white and black fixtures.
14. Consult factory.

Hub Ordering Logic

SHUB-SL-PW

Series	Shape[1, 2, 3]		Finish[4]	
SHUB				
	Sharp Hubs	**Curved Hubs**	**Standard Powder Coat**	**Premium**
	SL - 'L' Hub	**CL -** 'L' Hub	**PW -** White	**RALXXXX -** Powder Coat Gloss Finish
	ST - 'T' Hub	**CT -** 'T' Hub	**PB -** Black	**Custom Powder Coat**
	SX - 'X' Hub	**CX -** 'X' Hub	**PS -** Silver	**PO -** Powder Other
	SI - 'I' Hub	**CI -** 'I' Hub		
	SE - 'E' Hub	**CE -** 'E' Hub		

Ordering Notes

1. Custom configurations available. Consult factory for more information.
2. If no 'E' hubs are selected, a regular flat end cap will be provided by default.
3. See page 4 for Hub configurations.
4. See page 3 for standard and premium options.


The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

STARTEK
ARCHITECTURAL LIGHTING


Slim Beam Hub Suspended

Direct / Indirect


Dimensions

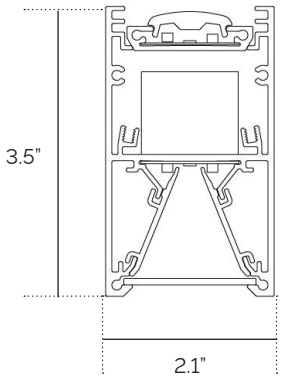


End Caps



Flat



Sharp



Curved

Finishes

Standard



PW: White



PB: Black



PS: Silver

Premium Stock




PSF001: Wood 1




PSF002: Wood 2



PSF003: Wood 3




PSF004: Wood 4



PSF005: Wood 5



PSF006: Wood 6



PSF007: Stone 1



PSF008: Stone 2




PSF009: Stone 3


NOTE: A minimal impact to lead times will apply to products specified with Premium Stock Finishes (PSF). It is not to be assumed that these finishes are stocked in our warehouse, but rather, are readily available to us for your project.

All other custom finishes (PO) will incur a set up fee and will add an extended lead time to your project.


Distribution




Indirect: Clear (CL)
Direct: SatinIce Diffuse (SD)




Indirect: Batwing (BW)
Direct: SatinIce Diffuse (SD)




Indirect: Clear (CL)
Direct: Wide Diffuse (WD)



Indirect: Batwing (BW)
Direct: Wide Diffuse (WD)



Indirect: Clear (CL)
Direct: Wall Wash (WW)



Indirect: Batwing (BW)
Direct: Wall Wash (WW)

STARTEK Architectural Lighting
899 E. Park Avenue, Libertyville, Illinois 60048
877-782-7835


The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

Hub Configurations


Sharp



'L' Sharp (SL)




'T' Sharp (ST)



'X' Sharp (SX)



'I' Sharp (SI)




'E' Sharp (SE)


Curved



'L' Curved (CL)




'T' Curved (CT)



'X' Curved (CX)




'I' Curved (CI)



'E' Curved (CE)


Performance

SLIMDIH-X-325-750-WD-BW (80+ CRI)

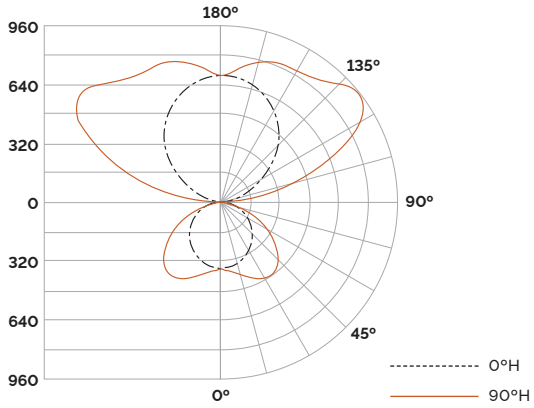

CCT	Length	Lumens	Wattage	LPW
3000K	4'	4300	37	116
	8'	8600	72	119
3500K	4'	4300	36	120
	8'	8600	71	121
4000K	4'	4300	35	124
	8'	8600	68	127
5000K	4'	4300	34	126
	8'	8600	67	128

SLIMDI-X-400-375-SD-CL (80+ CRI)

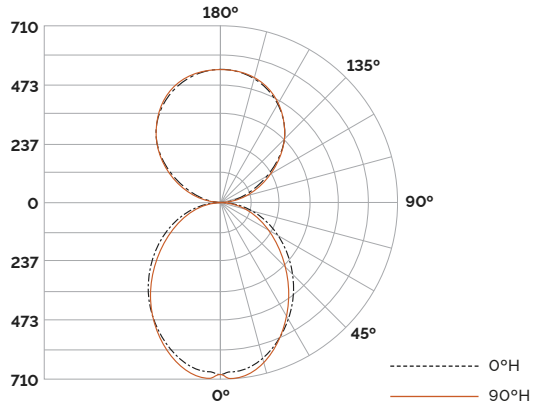

CCT	Length	Lumens	Wattage	LPW
3000K	4'	3025	25	122
	8'	6050	47	128
3500K	4'	3025	24	128
	8'	6050	45	134
4000K	4'	3025	23	132
	8'	6050	44	138
5000K	4'	3025	23	134
	8'	6050	43	141

Row Configurations

XX (Run Length)

The standard construction of run lengths follows the logic of the table below. Consult factory for additional information. Run lengths always start with the longest fixture and receives the power feed.


NOTE: Fixtures in continuous runs are available in 6" increments. Consult factory for smaller increments.


Total Length (Feet)	# of Sections						
	2	3	4	5	6	7	8
2	1						
3		1					
4			1				
5				1			
6					1		
7						1	
8							1
9			1	1			
10			1		1		
11		1					1
12			1				1
13				1			1
14					1		1
15						1	1
16							2
17			1	1			1
18			1		1		1
19		1					2
20			1				2
21				1			2
22					1		2
23						1	2
24							3
25			1	1			2
26			1		1		2
27		1					3
28			1				3
29				1			3
30					1		3
31						1	3
32							4
33			1	1			3
34			1		1		3
35		1					4
36			1				4
37				1			4
38					1		4
39						1	4
40							5


Mounting

ACXXX (Aircraft Cable with Canopy)


Drywall, Solid, Tile (On-Grid), and Tile (Off-Grid)

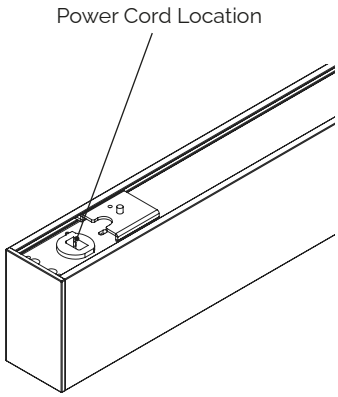


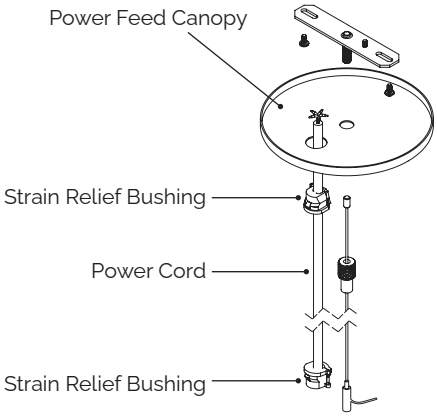

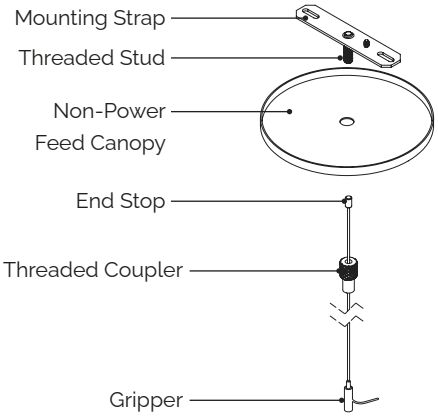


ALXXX (Aircraft Cable with Loops)

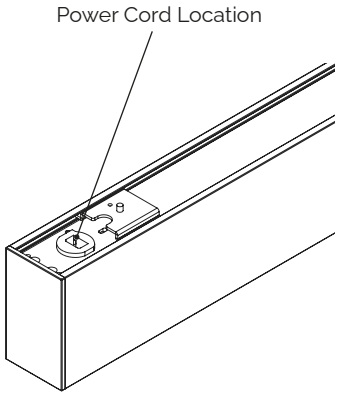

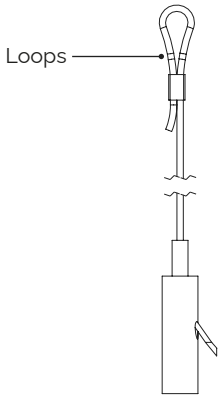

Power Cord & First Mount Details

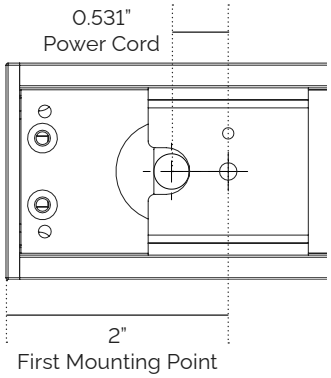

The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

Submit With Order

Bill of Materials Guide

How to use: Fill out the worksheet to specify your requirements for your configurations.
Be sure to call out battery and sensor locations.


Refer to the run chart for standard run configurations on linear lengths. Consult factory for custom configurations.
Use the order guide to create your BOM for you configuration.

Submit this worksheet along with your order.

Example 1

Qty.	Type
1	SLIMDIH-10-500-SD-30K-90-PW-ACW05-U-1C-S
3	SLIMDIH-10-500-SD-30K-90-PW-ACW05-U-1C-M
4	SHUB-SL-PB


Example 1 Configuration

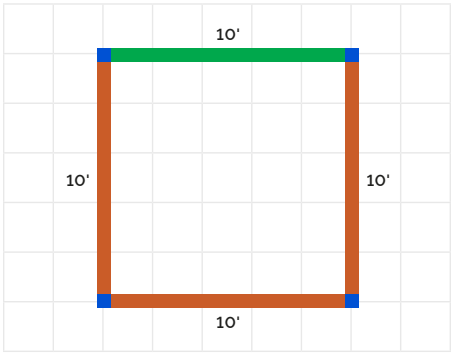

Example 2

Qty.	Type
1	SLIMDIH-8-500-SD-30K-90-PW-ACW05-U-1C-S
3	SLIMDIH-8-500-SD-30K-90-PW-ACW05-U-1C-M
4	SHUB-SI-PB
1	SHUB-SX-PB


Example 2 Configuration

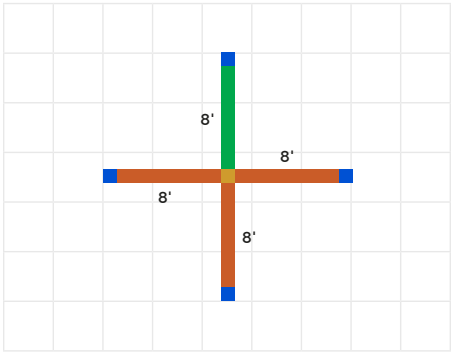

Example 3

Qty.	Type
1	SLIMDIH-13-500-SD-30K-90-PW-ACW05-U-1C-S
2	SLIMDIH-4-500-SD-30K-90-PW-ACW05-U-1C-M
1	SLIMDIH-8-500-SD-30K-90-PW-ACW05-U-1C-M
1	SLIMDIH-8-500-SD-30K-90-PW-ACW05-U-1C-M-1EMB6
1	SLIMDIH-6-500-SD-30K-90-PW-ACW05-U-1C-E
2	SHUB-SL-PB
2	SHUB-ST-PB
2	SHUB-SE-PB

Example 3 Configuration

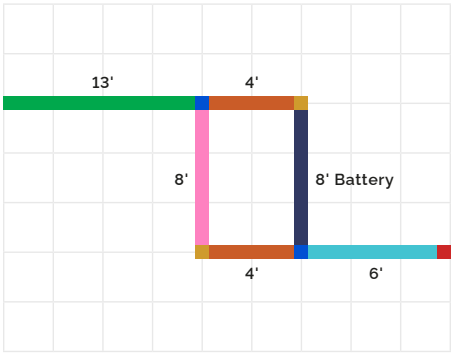

The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.

Submit With Order

Bill of Materials Guide

Order Guide


Qty.	Type

Qty.	Type

Mounting Locations

Each starter or individual fixture will be provided with (2) mounting supports (●). Each additional fixture will be provided with (1) support which can be located anywhere along the second half of the fixture (highlighted below):


Examples of continuous run mounting locations are as follows:

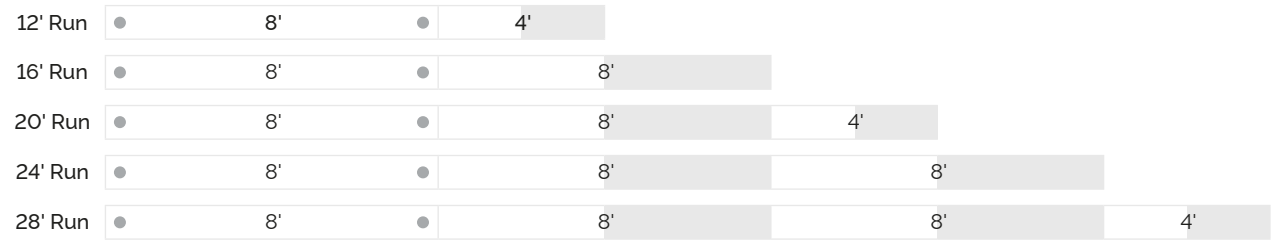


Controls

Sensor

Wattstopper FS-205 v2 Low Voltage PIR. Integrated photosensor for hold-off daylighting control. 24VDC operating voltage. Adjustable time delay (30 seconds to 30 minutes).

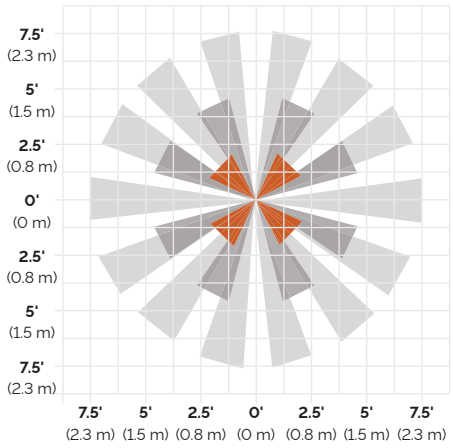


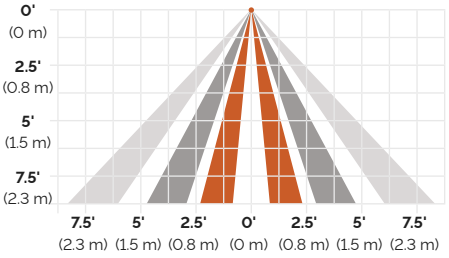





Wireless Node

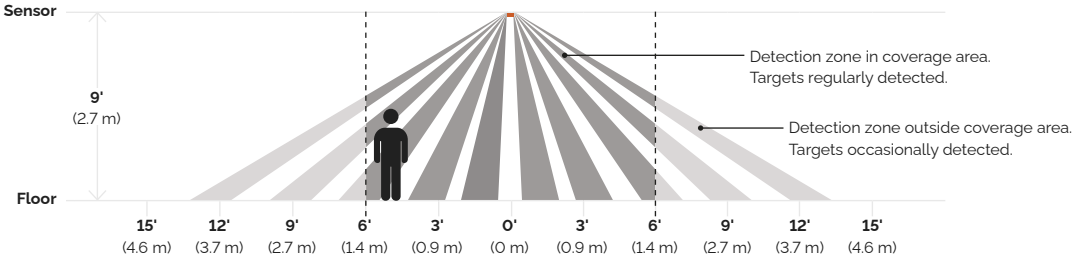



The information in this document is subject to change without notice.
Contact STARTEK for most up to date product details.