

Warp Speed 

Beam Suspended

Direct / Indirect

Warp Speed Features

- Ship up to 500' in 5 working day
- Standard individual lengths: 2', 4', 6' or 8'
- Continuous lensing standard – runs up to 200'
- Light levels can be factory set
- Efficacy up to 138 lm/W

5 Year
Warranty


BABA
Compliant

BAA
Compliant



RoHS
Compliant

Declare.

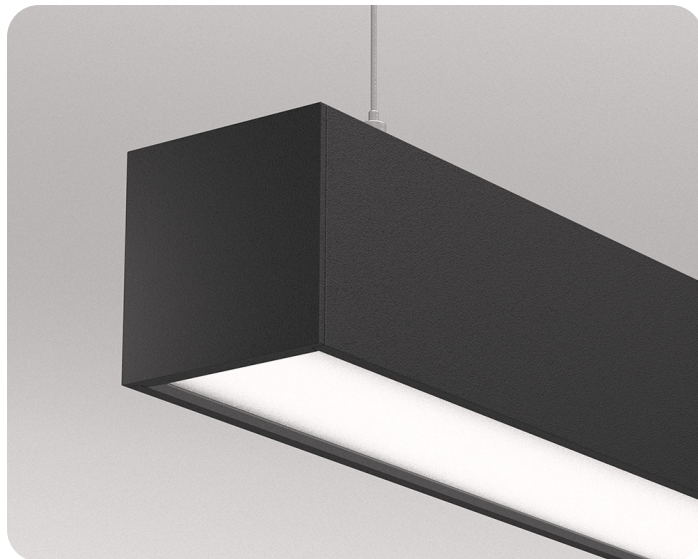

Specifications

Construction

- Continuous extruded 6063 T5 aluminum
- Mechanically attached end caps with no exposed fasteners enhance architectural aesthetic and prevent light leak.

Dimensions

- Nominal dimensions: 3.5" x 3.5"
- Nominal thickness: 0.075"

Finish

- Powder coated
- Colors: White or Black

Luminaire Length

- Standard individual lengths: 2', 4', 6' or 8'
- Fixture and run lengths are available in 1/16" increments.
- Using internal joiners, sections can be joined to form longer, continuous rows.

Source

- CCT options: 3000K, 3500K, or 4000K
- All within 3 MacAdam ellipses
- 80 CRI

Lensing

- 0.080" thick impact resistant acrylic lens
- Soft diffuse direct lighting

Operating Temperature

- -40°C to 50°C (-40°F to 122°F)
- Soft diffuse direct lighting

Lithium Ion Battery

- Provides up to 780 lm (6W) or up to 1300 lm (10W) for 90 minutes.
- Certifications: UL924 listed, Class 2 compliant, and Title 20 CEC (California Energy Commission) compliant

Dimming (Integral) Driver

- Constant current programmable LED driver
- Output current: 0-10V, dim to 1% (UL listed, Class P)
- Ring wave surge protection: 2.5KV ring
- Power factor: >0.90

Certifications

- Build America Buy America compliant
- Buy American Act compliant
- Intertek cETLus Listed
- DLC listed
- RoHS (Restriction of Hazardous Substances)
- JA8 compliant
- Suitable for dry and damp locations

Packaging

- Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Warranty

- 5-year limited warranty.



Ordering Logic


WS-BEAMDI-40-750-500-WD-BW-35K-80-PW-ACW10-U-1C

Series	Length	Direct Output ¹	Indirect Output ¹	Direct Distribution	Indirect Distribution
WS-BEAMDI					
	XX - Run Length	250 - 250 LPF	250 - 250 LPF	SD - SatinIce Diffuse	CL - Clear Lens
		500 - 500 LPF	500 - 500 LPF	WD - Wide Diffuse	BW - Batwing
		750 - 750 LPF	750 - 750 LPF		
		1000 - 1000 LPF	1000 - 1000 LPF		
		XXX - Custom LPF	XXX - Custom LPF		
CCT	CRI	Finish ⁴	Mounting		Voltage
	80				U
30K - 3000K	80 - 80 CRI	PW - White	Cables w/ Canopy Kits	Cables w/ Loops	U - 120-277V
35K - 3500K		PB - Black	ACW05 - 5' White Cord	ALW10 - 10' White Cord	
40K - 4000K			ACW10 - 10' White Cord	ALB10 - 10' Black Cord	
			ACB05 - 5' Black Cord		
			ACB10 - 10' Black Cord		
Circuiting	Emergency ^{2,3,4}				
1C					
1C - Single Circuit	BLANK - None				
	#EMB6 - 6W EM Battery				
	#EMB10 - 10W EM Battery				


Ordering Notes

- 200 LPF min. output / 1500 LPF max. output.
- Continuous runs with batteries must have an Ordering Guide Worksheet submitted with your order. See page 4.
- # indicates number per run.
- Provided by Iota/Bodine.

Dimensions

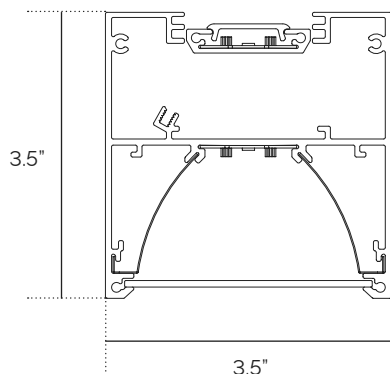

Distribution

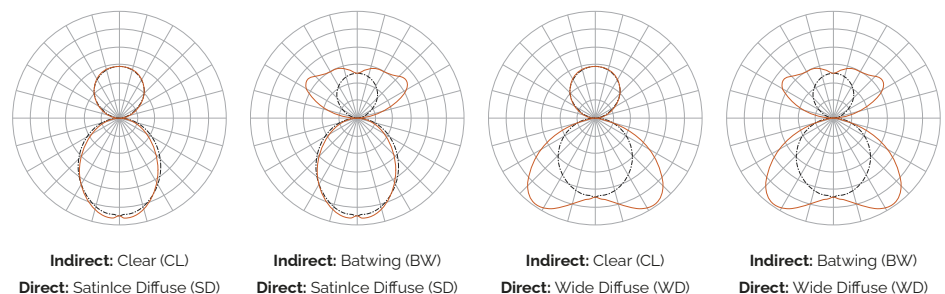

Finishes



PW: White



PB: Black

Lumen Packages




Length	Lumens	Input Wattage	LPW
4'	5000	41	121
8'	10000	78	128

NOTE: Based on 3500K CCT. Other CCT available.



Mounting

ACXXX (Aircraft Cable with Canopy)


Drywall, Solid, Tile (On-Grid), and Tile (Off-Grid)

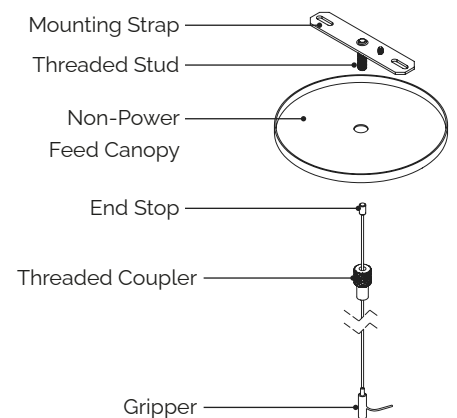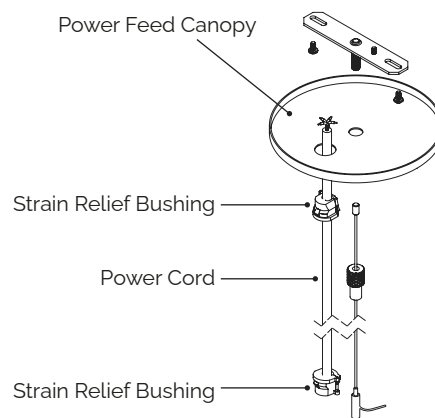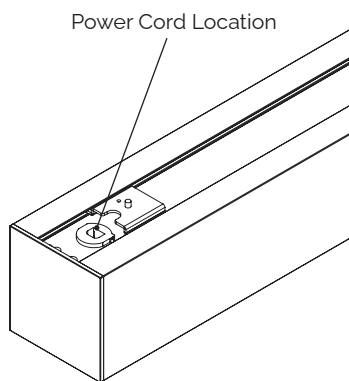

ALXXX (Aircraft Cable with Loops)

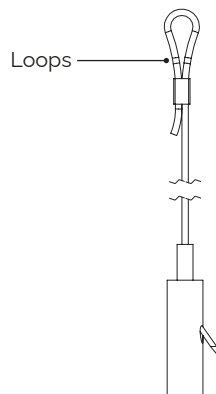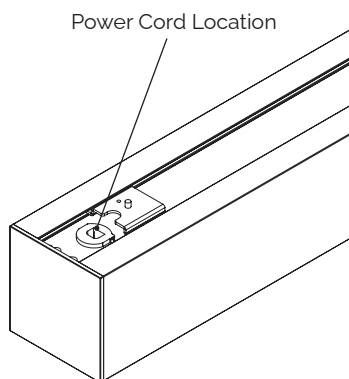

Power Cord & First Mount Details

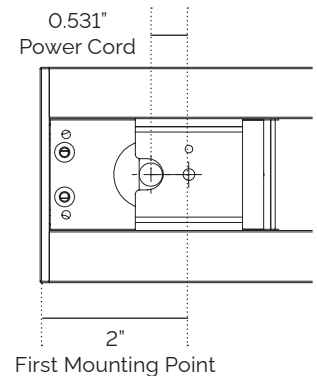

Submit With Order

Ordering Guide Worksheet

How to use: Fill out the worksheet to specify your requirements for battery and sensor locations. Refer to the run chart for standard run configurations or consult factory for custom configurations.

Submit this worksheet along with your order.

NOTE: Standard battery operates entire fixture segment.

EXAMPLE: WS-BEAMD-40-625-WD-35K-80-PW-ACW10-U-1C

[illegible]

Run Chart

Total Length (Feet)	Housing Configurations Section Length	Total Length (Feet)	Housing Configurations Section Length	Total Length (Feet)	Housing Configurations Section Length
9	5 + 4	24	8 + 8 + 8	39	8 + 8 + 8 + 8 + 7
10	6 + 4	25	8 + 8 + 5 + 4	40	8 + 8 + 8 + 8 + 8
11	7 + 4	26	8 + 8 + 6 + 4	41	8 + 8 + 8 + 8 + 5 + 4
12	8 + 4	27	8 + 8 + 7 + 4	42	8 + 8 + 8 + 8 + 6 + 4
13	8 + 5	28	8 + 8 + 8 + 4	43	8 + 8 + 8 + 8 + 7 + 4
14	8 + 6	29	8 + 8 + 8 + 5	44	8 + 8 + 8 + 8 + 8 + 4
15	8 + 7	30	8 + 8 + 8 + 6	45	8 + 8 + 8 + 8 + 8 + 5
16	8 + 8	31	8 + 8 + 8 + 7	46	8 + 8 + 8 + 8 + 8 + 6
17	8 + 5 + 4	32	8 + 8 + 8 + 8	47	8 + 8 + 8 + 8 + 8 + 7
18	8 + 6 + 4	33	8 + 8 + 8 + 5 + 4	48	8 + 8 + 8 + 8 + 8 + 8
19	8 + 7 + 4	34	8 + 8 + 8 + 6 + 4		
20	8 + 8 + 4	35	8 + 8 + 8 + 7 + 4		
21	8 + 8 + 5	36	8 + 8 + 8 + 8 + 4		
22	8 + 8 + 6	37	8 + 8 + 8 + 8 + 5		
23	8 + 8 + 7	38	8 + 8 + 8 + 8 + 6		

NOTES:

- Standard run configurations. Consult factory for custom configurations.
- Ordering guide requires standard run configurations.

NOTES:

1. Standard run configurations. Consult factory for custom configurations.
2. Ordering guide requires standard run configurations.