

Warp Speed 

Nova Pro Suspended

Direct / Indirect

Warp Speed Features

- Ship up to 500' in 5 working day
- 2', 4', 6' and 8' individual units or continuous rows
- Linear runs available up to 100' with proprietary lens joiner for seamless optics
- Lumen levels can be factory set
- Efficacy up to 147 lm/W


5 Year
Warranty

BABA
Compliant

BAA
Compliant



RoHS
Compliant

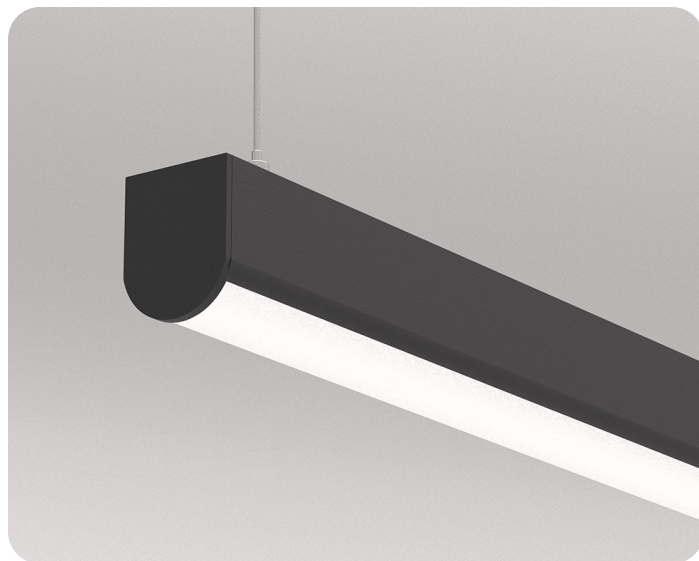

Specifications

Construction

- Continuous extruded 6063 T5 aluminum
- Mechanically attached end caps with no exposed fasteners enhance architectural aesthetic and prevent light leak.

Dimensions

- Nominal dimensions: 2.0" x 2.4"

Finish

- Powder coated
- Colors: White or Black

Luminaire Length

- Standard individual lengths: 2', 4', 6' or 8'
- Using internal joiners, sections can be joined to form longer, continuous rows.

Source

- CCT options: 3000K, 3500K, or 4000K
- All within 3 MacAdam ellipses
- 80 CRI

Lensing

- 0.060" thick impact resistant acrylic lens
- Soft diffuse direct lighting

Operating Temperature

- -40°C to 50°C (-40°F to 122°F)

Lithium Ion Battery

- Provides up to 780 lm (6W) or up to 1300 lm (10W) for 90 minutes.
- Certifications: UL924 listed, Class 2 compliant, and Title 20 CEC (California Energy Commission) compliant

Dimming (Integral) Driver

- Constant current programmable LED driver
- Output current: 0-10V, dim to 1% (UL listed, Class P)
- Ring wave surge protection: 2.5KV ring
- Power factor: >0.90

Certifications

- Build America Buy America compliant
- Buy American Act compliant
- Intertek cETLus Listed
- RoHS (Restriction of Hazardous Substances)
- Suitable for dry and damp locations

Packaging

- Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Warranty

- 5-year limited warranty.



Ordering Logic

WS-NOVPDI-40-750-500-SD-BW-35K-80-PW-ACW10-U-1C

Series	Length	Direct Output ¹	Indirect Output ¹	Direct Distribution	Indirect Distribution
WS-NOVPDI				SD	
	XX - Run Length	250 - 250 LPF 500 - 500 LPF 750 - 750 LPF 1000 - 1000 LPF XXX - Custom LPF	250 - 250 LPF 500 - 500 LPF 750 - 750 LPF 1000 - 1000 LPF XXX - Custom LPF	SD - Satin Ice Diffuse	CL - Clear Lens BW - Batwing


CCT	CRI	Finish ²	Mounting		Voltage
	80				U
30K - 3000K 35K - 3500K 40K - 4000K	80 - 80 CRI	PW - White PB - Black	Cables w/ Canopy Kits ACW05 - 5' White Cord ACW10 - 10' White Cord ACB05 - 5' Black Cord ACB10 - 10' Black Cord	Cables w/ Loops ALW10 - 10' White Cord ALB10 - 10' Black Cord	U - 120-277V

Circuiting	Emergency ³
1C	
1C - Single Circuit	#EMB6 - 6W EM Battery ⁴ #EMB10 - 10W EM Battery ⁴

Ordering Notes

- 200 LPF min. output / 1500 LPF max. output.
- See below for standard options.
- Continuous runs with batteries must have an [Ordering Guide Worksheet](#) submitted with your order. See page 6.
- Provided by Iota/Bodine.

Dimensions

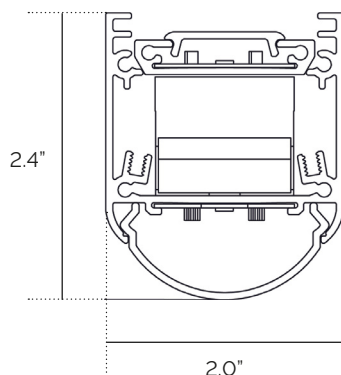

Lumen Packages

Length	Lumens	Input Wattage	LPW
4'	4400	33	135
4'	4000	31	129

NOTE: Based on 3500K CCT. Other CCT available.

Finishes


Standard



PW: White


PB: Black

Distribution

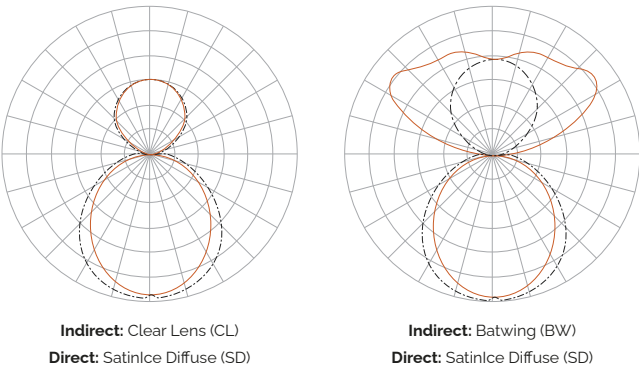


Performance

NOVPD-X-750-350-SD-CL (80+ CRI)

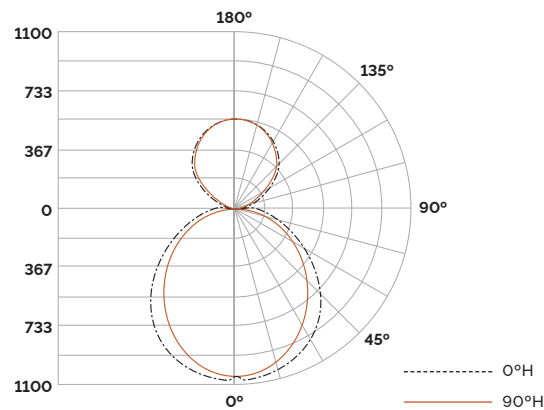

CCT	Length	Lumens	Wattage	LPW
3000K	4'	4400	33	135
	8'	8800	65	135
3500K	4'	4400	32	138
	8'	8800	64	138
4000K	4'	4400	31	140
	8'	8800	62	141
5000K	4'	4400	31	144
	8'	8800	60	147

NOVPD-X-500-500-SD-BW (80+ CRI)

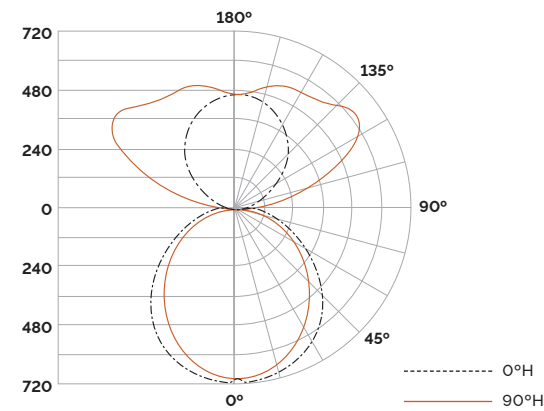

CCT	Length	Lumens	Wattage	LPW
3000K	4'	4000	31	129
	8'	8000	61	131
3500K	4'	4000	30	133
	8'	8000	59	135
4000K	4'	4000	29	136
	8'	8000	58	138
5000K	4'	4000	28	141
	8'	8000	56	143

Maximum Run Lengths




Maximum run lengths are calculated based on wattage consumed per foot utilizing 8' fixtures.

Wattage (Per Fixture)	Voltage	Max. Length
93-75W	120	103
	277	238
74-60W	120	127
	277	298
59-50W	120	162
	277	374
> 50W	120	190
	277	442



Mounting

ACXXX (Aircraft Cable with Canopy)

Drywall, Solid, Tile (On-Grid), and Tile (Off-Grid)

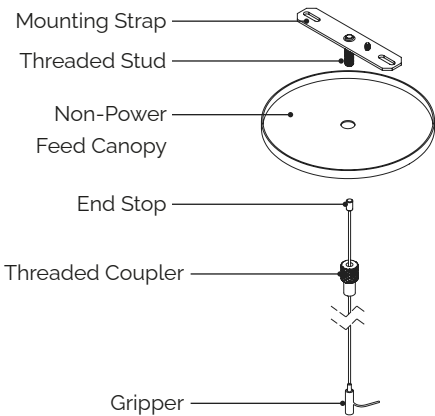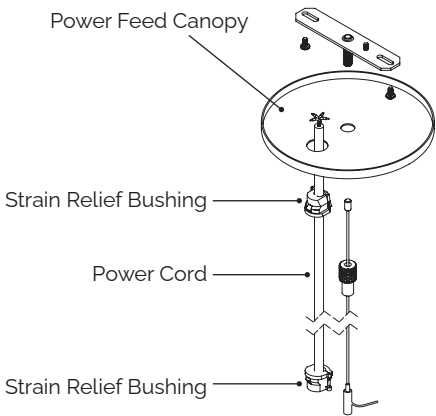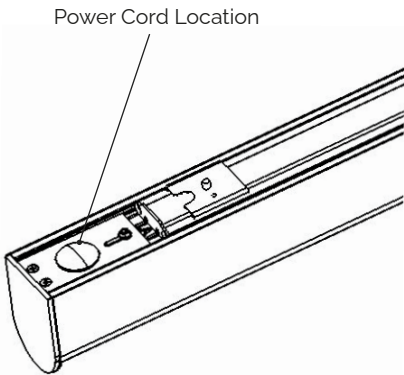

ALXXX (Aircraft Cable with Loops)

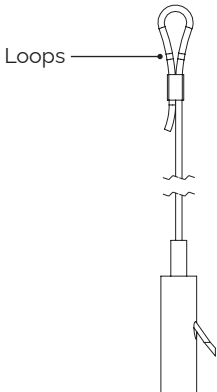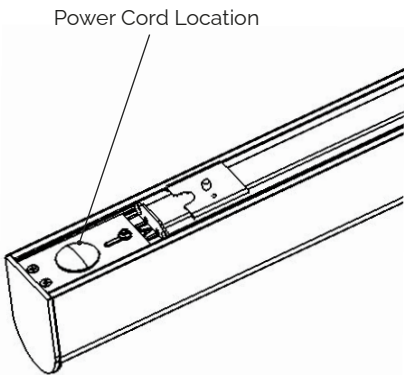

Submit With Order

Ordering Guide Worksheet

How to use: Fill out the worksheet to specify your requirements for battery and sensor locations.
Refer to the run chart for standard run configurations or consult factory for custom configurations.

Submit this worksheet along with your order.

NOTE: Standard battery operates entire fixture segment.

EXAMPLE: WS-NOVPDI-40-750-500-SD-BW-35K-80-PW-ACW10-U-1C-2EMB10

Table with 13 columns: Type, Qty, Run Length, and Fixture in Row (1-10). Example row: A40, 1, 40', B, B.

Run Chart

Table with 6 columns: Total Length (Feet), Housing Configurations Section Length, Total Length (Feet), Housing Configurations Section Length, Total Length (Feet), Housing Configurations Section Length. Includes a NOTES section at the bottom right.