

Warp Speed 

Halo Suspended Direct

Warp Speed Features

- Available in 2', 3', and 4' diameters
- Seamless direct lensing and aluminum housing
- 0-10V dimming to 1% is standard
- 120-277V for power enclosure


5 Year
Warranty

BABA
Compliant

BAA
Compliant



RoHS
Compliant

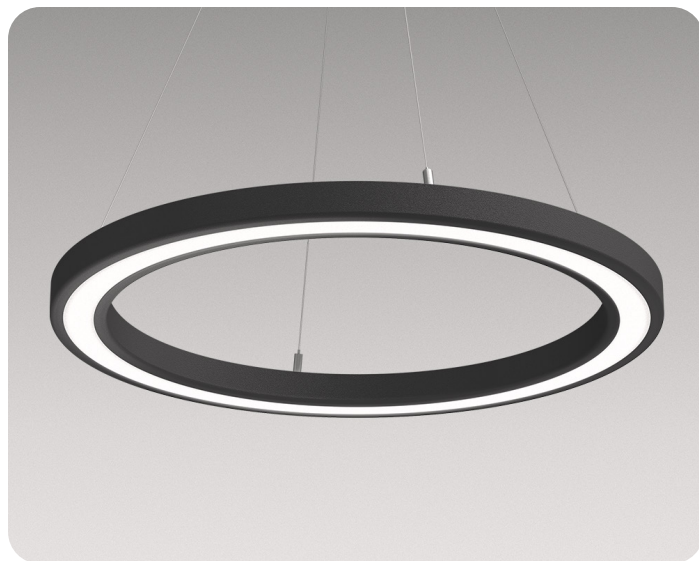

Specifications

Construction

- One-piece extruded 6063 aluminum
- All sizes are assembled as one piece

Dimensions

- Nominal dimensions: 2.3" x 1.3"

Finish

- Powder coated
- Colors: White or Black

Luminaire Length

- Available diameters: 2', 3', or 4'

Source

- CCT options: 3000K, 3500K, or 4000K
- All within 3 MacAdam ellipses
- 80 CRI

Lensing

- 0.125" thick impact resistant acrylic lens
- Soft diffuse direct lighting

Operating Temperature

- -40°C to 50°C (-40°F to 122°F)

Controls

- Standard compatibility with external daylight and occupancy sensors.

Dimming Driver

- (0-10V) dimming driver with programmable current for configurable fixture lumen outputs (UL listed, Class P)
- Overcurrent protection: 2.5KV
- Power factor: >0.90

Certifications

- Build America Buy America compliant
- Buy American Act compliant
- Intertek cETLus Listed
- RoHS (Restriction of Hazardous Substances)
- Suitable for dry and damp locations

Packaging

- Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Warranty

- 5-year limited warranty.



Ordering Logic


WS-HALOD-2-3000-SD-35K-80-PW-PCSW-U

Series	Diameter	Direct Lumens ¹	Direct Distribution	CCT	CRI
WS-HALOD			SD		80
	2 - 2 Foot	XXXX - Custom Lumens	SD - SatinIce Diffuse	30K - 3000K	80 - 80 CRI
	3 - 3 Foot			35K - 3500K	
	4 - 4 Foot			40K - 4000K	
Finish ²	Mounting ³	Voltage			
		U			
PW - White	PCSW - Single Point Powered Canopy, White	U - 120-277V			
PB - Black	PCSB - Single Point Powered Canopy, Black				
	PCMW - Multiple Point Powered Canopy, White				
	PCMB - Multiple Point Powered Canopy, Black				

Ordering Notes

- Lumens can be specified within the ranges shown below.
- See below for standard options.
- 120-277V driver included.

Dimensions

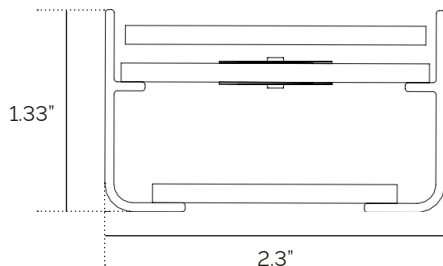


Lumen Packages

Diameter	Maximum Lumen Output
2'	6000
3'	9000
4'	14000

NOTE: Based on 3500K CCT. Other CCT available.

Finishes

Standard




PW: White



PB: Black

Distribution





Direct: SatinIce Diffuse (SD)



Mounting

PCSX (Single Point Powered Canopy with Included Driver)

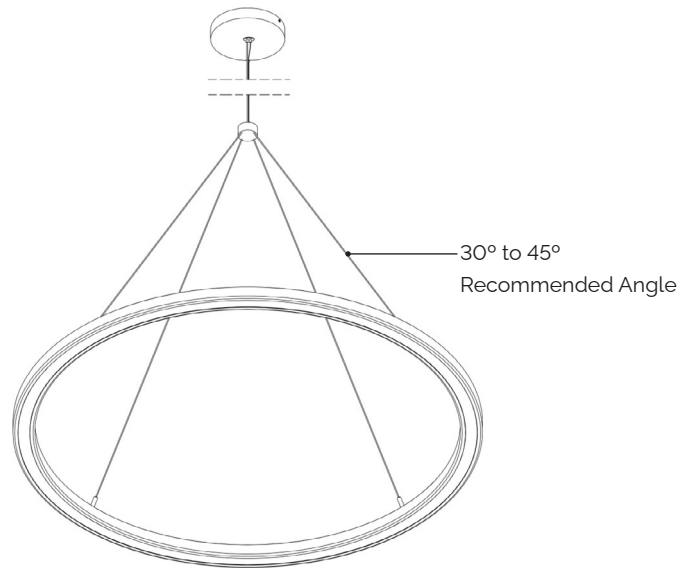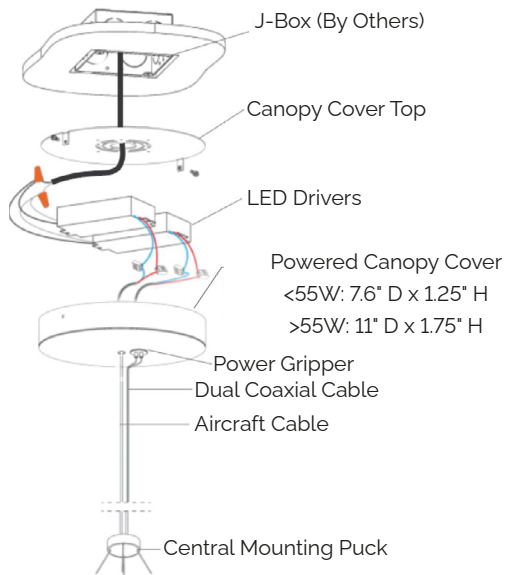

PCMX (Multiple Point Powered Canopy with Included Driver)

