
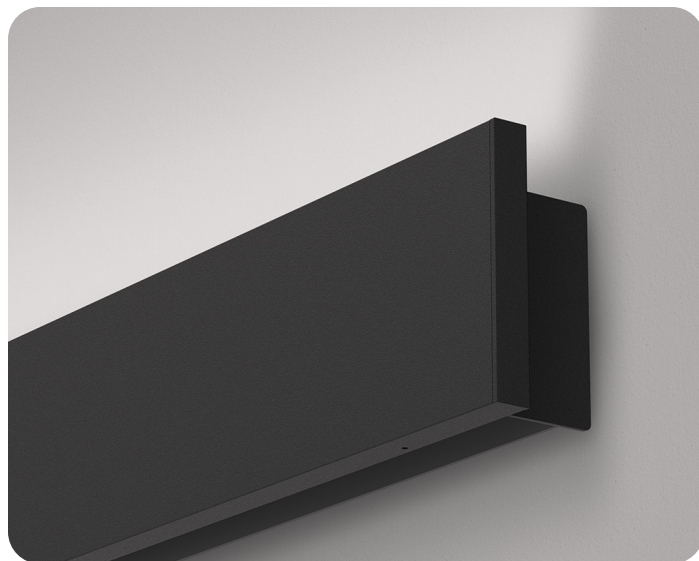


Mini Flat Wall Grazer

Indirect

Key Features

- Extruded aluminum two piece housing
- Soft diffuse direct lighting
- Snap-in lens and reflector for easy install
- 2', 4', 6' and 8' individual units or continuous rows
- 0-10V dimming to 1% is standard
- Efficacy up to 121 lm/W
- Consult factory for TM21, TM30, LM79 and LM80



Specifications

Construction

- Continuous extruded 6063 T5 aluminum

Dimensions

- Nominal dimensions: 4.8" x 3.3"

Finish

- Powder coated
- Colors: White, Black, Silver or Premium Finishes
- Custom colors available. Consult factory for more information.

Luminaire Length

- Standard individual lengths: 2', 4', 6' or 8'
- Fixture and run lengths are available in 1/16" increments.
- Using internal joiners, sections can be joined to form longer, continuous rows.

Source

- CCT options: 2700K, 3000K, 3500K, 4000K, or 5000K
- All within 3 MacAdam ellipses
- 90 CRI (R9 50 min) available
- L70 > 50,000 hours

Lensing

- 0.080" thick impact resistant acrylic lens
- Soft diffuse direct lighting

Operating Temperature

- -40°C to 45°C (-40°F to 113°F)

Lithium Ion Battery

- Provides up to 780 lm (6W) or up to 1300 lm (10W) for 90 minutes.
- Certifications: UL924 listed, Class 2 compliant, and Title 20 CEC (California Energy Commission) compliant

Dimming Driver

- LED Driver allows tunable output with infinite configurations
- Output current: 0-10V (Class 1 or Class 2)
- Surge protection: 2.5KV ring and wave
- Power factor: <0.93

Generator Transfer Device

- Luminaires with GTD option provides a UL924 shunt relay to bypass normal power, switches, and 0-10V dimming.

Certifications

- Build America Buy America compliant
- Buy American Act compliant
- Intertek cETLus Listed
- DLC listed
- RoHS (Restriction of Hazardous Substances)
- JA8 compliant
- Suitable for dry and damp locations

Packaging

- Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Warranty

- 5-year limited warranty.

Ordering Logic

WALLI-8-750-GRZ-35K-80-PW-HWM-MF-U-1C-1EMB10

Series	Length	Indirect Output ¹	Indirect Distribution	CCT	CRI
WALLI			GRZ		
	XX - Run Length	250 - 250 LPF 500 - 500 LPF 750 - 750 LPF 1000 - 1000 LPF XXX - Custom LPF	GRZ - Wall Graze	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K TW - Tunable White ³ (2700K-6500K)	80 - 80 CRI 90 - 90 CRI (R9 50 min)
Finish ²	Mounting	Trim	Voltage	Circuiting	Emergency
		MF			
Standard Powder Coat	HWM - Horizontal Wall Mount	MF - Mini Flat	U - 120-277V	1C - Single Circuit	BLANK - None
PW - White	VWM - Vertical Wall Mount		C - 347V	MC - Multiple Circuits ^{3,4}	EC - Emergency Circuit ⁵
PB - Black					#EMB6 - 6W EM Battery ^{6,7}
PS - Silver					#EMB10 - 10W EM Battery ^{6,7}
Premium					#GTD - Generator Transfer Device w/ ALCR ⁸
RALXXXX - Powder Coat Gloss Finish					
PSFX - Premium Stock Finish					
Custom Powder Coat					
PO - Powder Other					


Options

Specialty Drivers ⁹	Sensors ¹²
DT1 - eldoLED EcoDrive Dim to 1% (0-10V)	AWNRR - Lutron Athena Wireless Node (RF Only)
DTZ - eldoLED SoloDrive Dim to 0.1% (0-10V)	AWNS - Lutron Athena Wireless Node w/ Sensor
PSRD - Philips Sensor Ready (DALI) Driver	Controls
LDE1 - Lutron Hi-Lume EcoSystem LED Driver w/ Soft-on, Fade-to-Black	DMX - DMX Lighting Control (RGBW)
TW-A - Tunable White, 0-10V ¹⁰	
TW-EL - eldoLED DUALdrive Tunable White (DALI) ¹⁰	
LD2 - Lutron DALI 2 Digital Tunable White Driver w/ 1% Dimming ¹¹	

Ordering Notes


- 200 LPF min. output / 1500 LPF max. output.
- See page 3 for standard options.
- Customer to specify number of zones and locations through factory submittal drawings.
- Multiple low and line control zones.
- Separate power, transfer devices provided by others.
- '#' indicates number per run.
- Provided by Iota/Bodine.
- Iota EDS-DR Emergency Control Device
- Standard driver is 0-10V, dim to 1% output current.
- 75 Watt Max. Dual driver required for higher fixture wattage.
- 50 Watt Max. Dual driver required for higher fixture wattage.
- Athena sensor matches finish for white and black fixtures.

Dimensions

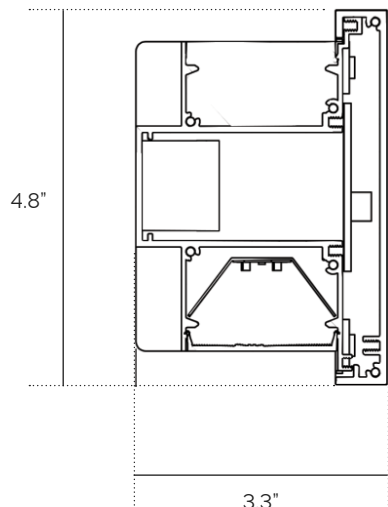

Finishes

Standard



PW: White



PB: Black



PS: Silver

Premium Stock




PSF001: Wood 1




PSF002: Wood 2



PSF003: Wood 3



PSF004: Wood 4



PSF005: Wood 5



PSF006: Wood 6



PSF007: Stone 1



PSF008: Stone 2




PSF009: Stone 3

NOTE: A minimal impact to lead times will apply to products specified with Premium Stock Finishes (PSF). It is not to be assumed that these finishes are stocked in our warehouse, but rather, are readily available to us for your project.

All other custom finishes (PO) will incur a set up fee and will add an extended lead time to your project.

Distribution

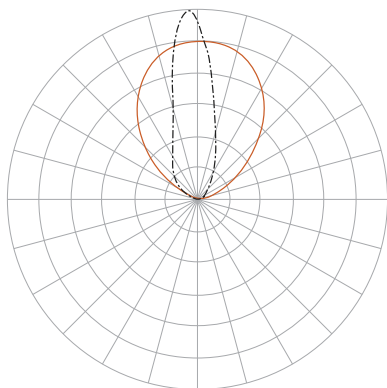

Indirect: Wall Graze (GRZ)

Power Location




Cover



J-Box

4" x 15" x 125"

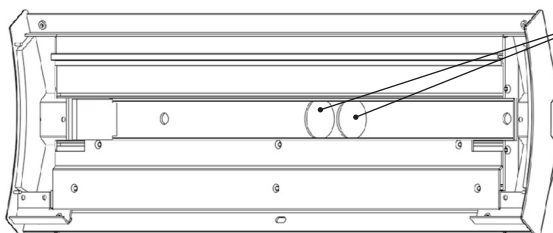


Power Location Holes



Performance

WALLI-8-1000-GRZ-35K-80

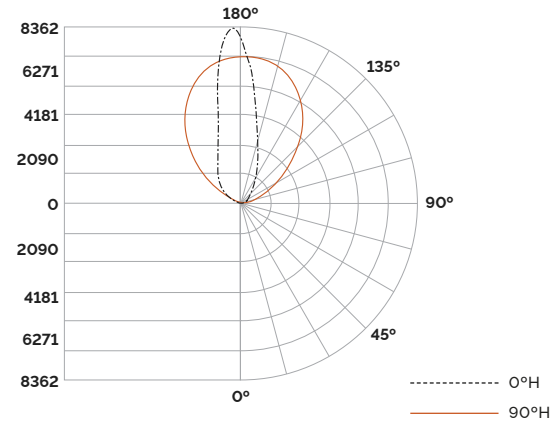

Luminance Data (cd/sq.m)

Angles	Avg. 0°	Avg. 45°	Avg. 90°
45°	0	0	0
55°	0	0	0
65°	0	0	0
75°	0	0	0
85°	0	0	0

Candela Table

Vertical Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	16	14	18	33	54
5	18	15	20	37	146
10	19	17	21	43	296
15	21	18	23	49	505
20	22	19	25	59	784
25	23	20	26	172	1153
30	25	22	28	340	1639
35	26	24	56	537	2222
40	28	27	172	813	2911
45	86	111	332	1121	3646
50	216	259	507	1491	4388
55	408	445	754	1877	5074
60	609	659	1158	2329	5658
65	933	1050	1704	2855	6143
70	1669	1737	2280	3523	6518
75	2459	2471	3004	4341	6810
80	3547	3470	4065	5296	7010
85	5392	5176	5575	6284	7120
90	7266	7266	7266	7266	7266

Power

Direct LPF	Total Lumens	Wall Wash (W/W)	
		LPW	W/ft.
300	2800	100	4
500	4000	100	5
750	6000	100	9
1000	8000	100	10

NOTE: Based on 8' lengths at 35K CCT and 80 CRI modules. All wattage values are rounded up. Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%.

Wattage Multiplier

CRI	CCT	4' Length	8' Length
80 CRI	3000K	1.11	1.05
	3500K	1.05	1.00
	4000K	1.03	0.98
	5000K	1.02	0.97
90 CRI	3000K	1.17	1.11
	3500K	1.11	1.05
	4000K	1.08	1.03
	5000K	1.07	1.02

Multiplier How-To

To determine CRI/CCT configuration wattage:


Choose wattage from Power matrix for desired optic and lumen output for 8' fixture length.

Wattage x Multiplier = New Configuration Wattage

Row Configurations


Individual & Continuous Fixtures

Individual fixtures are available from 2' to 8'. The standard construction for run lengths is to build with as many 8' fixtures as possible and finish the run with a shorter length fixture if needed. If a different configuration is needed to meet an aesthetic requirement, please indicate this on your P.O. when placing your order.

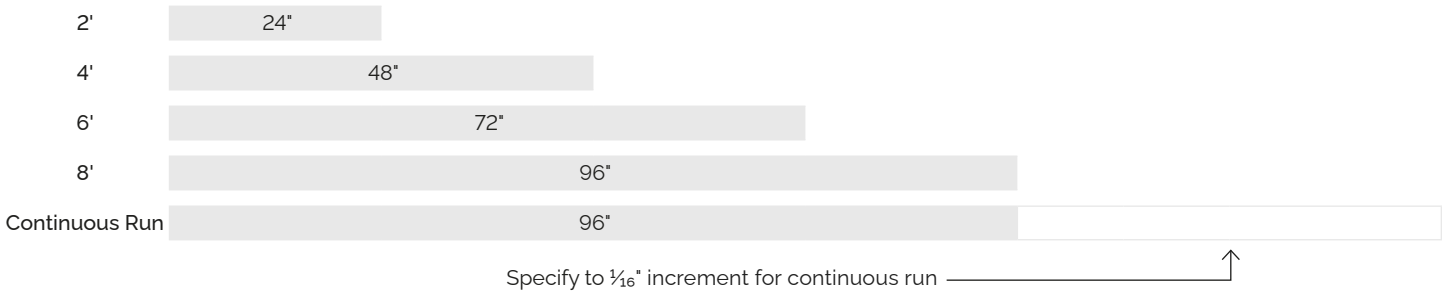

Mounting

WM (Wall Mount)

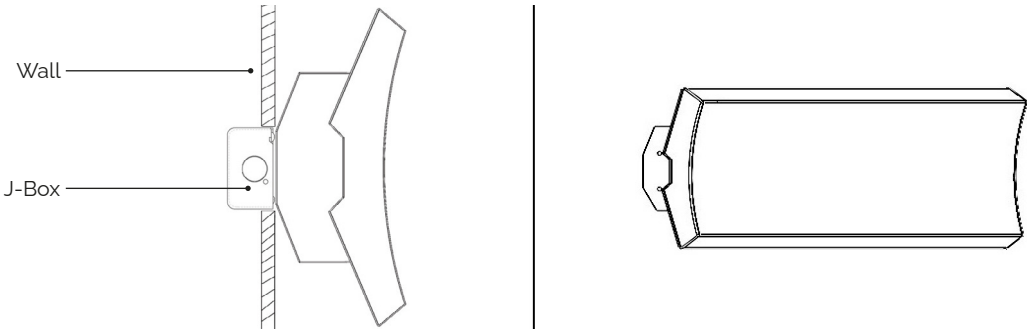

Wiring Diagram

Wiring configurations are dependent on the options chosen. Below are a few examples of our standard wiring that is used to power the fixture.

This wiring diagram is showing a standard set of wires for a basic fixture.

Wiring		
High Voltage	Low Voltage	
18 GA		
H = Hot	+D(V) = +Dimming	Hot (Black)
N = Neutral	-D(G) = -Dimming	Neutral (White)
GND = Ground	2864	Ground (Green)
		+Dimming (Violet)
		-Dimming (Pink)

This wiring diagram is showing a set of wires for a fixture with a emergency battery.

Wiring		
High Voltage	Low Voltage	
18 GA		
H = Hot	+D(V) = +Dimming	Switched (Black)
N = Neutral	-D(G) = -Dimming	Neutral (White)
U = Unswitched	-	Ground (Green)
GND = Ground	-	Unswitched (Red)
		+Dimming (Violet)
		-Dimming (Pink)