

Warp Speed 

Slim Beam Suspended Direct

Warp Speed Features

- Ship up to 500' in 5 working day
- Standard individual lengths: 2', 4', 6' or 8'
- Continuous lensing standard – runs up to 200'
- Light levels can be factory set
- Efficacy up to 133 lm/W

5 Year
Warranty

BABA
Compliant

BAA
Compliant



RoHS
Compliant

Declare.



Specifications

Construction

- Continuous extruded 6063 T5 aluminum
- Mechanically attached end caps with no exposed fasteners enhance architectural aesthetic and prevent light leak.

Dimensions

- Nominal dimensions: 3.5" x 3.5"
- Nominal thickness: 0.075"

Finish

- Powder coated
- Colors: White or Black

Luminaire Length

- Standard individual lengths: 2', 4', 6' or 8'
- Fixture and run lengths are available in 1/16" increments.
- Using internal joiners, sections can be joined to form longer, continuous rows.

Source

- CCT options: 3000K, 3500K, or 4000K
- All within 3 MacAdam ellipses
- 80 CRI

Lensing

- 0.080" thick impact resistant acrylic lens
- Soft diffuse direct lighting

Operating Temperature

- -40°C to 50°C (-40°F to 122°F)
- Soft diffuse direct lighting

Lithium Ion Battery

- Provides up to 780 lm (6W) or up to 1300 lm (10W) for 90 minutes.
- Certifications: UL924 listed, Class 2 compliant, and Title 20 CEC (California Energy Commission) compliant

Dimming (Integral) Driver

- Constant current programmable LED driver
- Output current: 0-10V, dim to 1% (UL listed, Class P)
- Ring wave surge protection: 2.5KV ring
- Power factor: >0.90

Certifications

- Build America Buy America compliant
- Buy American Act compliant
- Intertek cETLus Listed
- DLC listed
- RoHS (Restriction of Hazardous Substances)
- JA8 compliant
- Suitable for dry and damp locations

Packaging

- Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Warranty

- 5-year limited warranty.



Ordering Logic

WS-SLIMD-40-625-WD-35K-80-PW-ACW10-U-1C


Series	Length	Direct Output ¹	Direct Distribution	CCT	CRI
WS-SLIMD					80
	XX - Run Length	250 - 250 LPF 500 - 500 LPF 750 - 750 LPF 1000 - 1000 LPF XXX - Custom LPF	SD - SatinIce Diffuse WD - Wide Diffuse	30K - 3000K 35K - 3500K 40K - 4000K	80 - 80 CRI

Finish	Mounting		Voltage	Circuiting	Emergency ^{2, 3, 4}
			U	1C	
PW - White	Cables w/ Canopy Kits	Cables w/ Loops	U - 120-277V	1C - Single Circuit	BLANK - None
PB - Black	ACW05 - 5' White Cord ACW10 - 10' White Cord ACB05 - 5' Black Cord ACB10 - 10' Black Cord	ALW10 - 10' White Cord ALB10 - 10' Black Cord			#EMB6 - 6W EM Battery #EMB10 - 10W EM Battery


Ordering Notes

- 200 LPF min. output / 1500 LPF max. output.
- Continuous runs with batteries must have an Ordering Guide Worksheet submitted with your order. See page 4.
- '#' indicates number per run.
- Provided by Iota/Bodine.


Dimensions

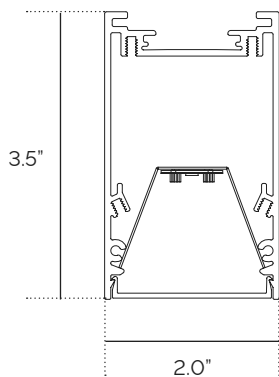

Distribution




Direct: SatinIce Diffuse (SD)



Direct: Wide Diffuse (WD)

Finishes



PW: White



PB: Black

Lumen Packages




Length	Lumens	Input Wattage	LPW
4'	3000	25	120
8'	6000	47	128

NOTE: Based on 3500K CCT. Other CCT available.



Mounting

ACXXX (Aircraft Cable with Canopy)


Drywall, Solid, Tile (On-Grid), and Tile (Off-Grid)

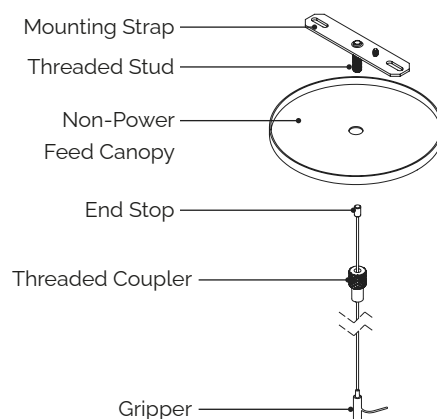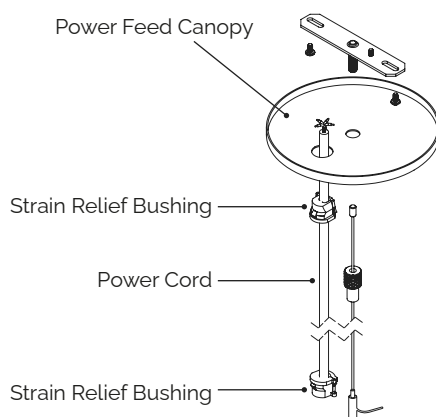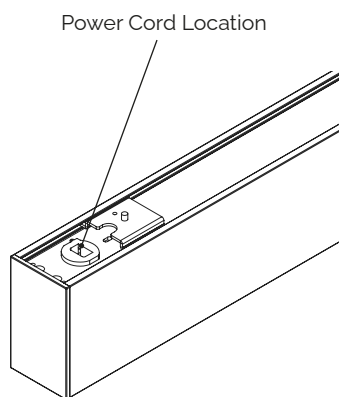

ALXXX (Aircraft Cable with Loops)

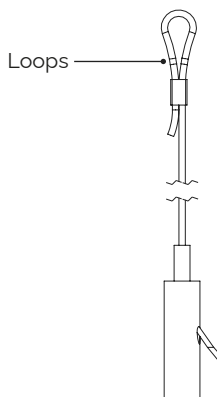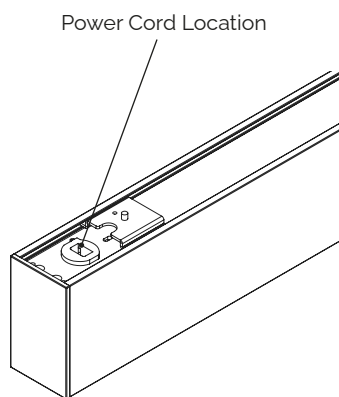

Power Cord & First Mount Details

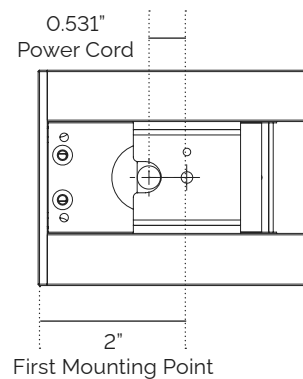

Ordering Guide Worksheet

Submit this worksheet along with your order.

NOTE: Standard battery operates entire fixture segment.

EXAMPLE: WS-SLMD-40-625-WD-35K-80-PW-ACW10-U-1C

[illegible]

Run Chart

Total Length (Feet)	Housing Configurations Section Length
9	5 + 4
10	6 + 4
11	7 + 4
12	8 + 4
13	8 + 5
14	8 + 6
15	8 + 7
16	8 + 8
17	8 + 5 + 4
18	8 + 6 + 4
19	8 + 7 + 4
20	8 + 8 + 4
21	8 + 8 + 5
22	8 + 8 + 6
23	8 + 8 + 7

Total Length (Feet)	Housing Configurations Section Length
24	$8 + 8 + 8$
25	$8 + 8 + 5 + 4$
26	$8 + 8 + 6 + 4$
27	$8 + 8 + 7 + 4$
28	$8 + 8 + 8 + 4$
29	$8 + 8 + 8 + 5$
30	$8 + 8 + 8 + 6$
31	$8 + 8 + 8 + 7$
32	$8 + 8 + 8 + 8$
33	$8 + 8 + 8 + 5 + 4$
34	$8 + 8 + 8 + 6 + 4$
35	$8 + 8 + 8 + 7 + 4$
36	$8 + 8 + 8 + 8 + 4$
37	$8 + 8 + 8 + 8 + 5$
38	$8 + 8 + 8 + 8 + 6$

Total Length (Feet)	Housing Configurations Section Length
39	$8 + 8 + 8 + 8 + 7$
40	$8 + 8 + 8 + 8 + 8$
41	$8 + 8 + 8 + 8 + 5 + 4$
42	$8 + 8 + 8 + 8 + 6 + 4$
43	$8 + 8 + 8 + 8 + 7 + 4$
44	$8 + 8 + 8 + 8 + 8 + 4$
45	$8 + 8 + 8 + 8 + 8 + 5$
46	$8 + 8 + 8 + 8 + 8 + 6$
47	$8 + 8 + 8 + 8 + 8 + 7$
48	$8 + 8 + 8 + 8 + 8 + 8$

NOTES:

1. Standard run configurations. Consult factory for custom configurations.
2. Ordering guide requires standard run configurations.