


INSTALLATION INSTRUCTIONS



THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS.
DISCONNECT POWER PRIOR TO ANY INSTALLATION.
DEBRANCHEZ LE COURANT AVANT TOUTE INSTALLATION.
CAP ALL WIRING CONNECTIONS WITH UL APPROVED WIRE CONNECTORS.
COUVRIR TOUTES LES CABLES AVE DES CONNECTIONS APPROUVEES (UL).
VERIFY SUPPLY VOLTAGE MEETS LUMINAIRE LABEL SPECIFICATIONS.
VERIFIEZ QUE LA TENSION SOIT COMPATIBLE AVEC LES CARACTERISTIQUES DU LUMINAIRE MARQUE SUR LETIQUETTE.
ALLOW FIXTURE TO COOL BEFORE TOUCHING HEATSINK OR LIGHT SOURCE.
LAISSEZ LE PROJECTEUR REFOIDIR AVANT DE TOUCHER LE RADIATEUR OU LA SOURCE DE LUMIERE.
DO NOT ATTEMPT TO OPEN OR MAKE REPAIRS INSIDE LUMINAIRE.
NE PAS TENTER DOUVRIRE OU DE FAIRE DES REPARATINS A L'INTERIEUR DU LUMINAIRE.
AVOID DIRECT VIEWING OF LIGHT SOURCE.
EVITEZ DE REGARDER DIRECTMENT LA SOURCE LUMINEUSE.
THIS PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.
CE PRODUIT DOIT ITRE INSTALLE PAR UN ELECTRICIEN QUALIFIE.
SUITABLE FOR UNDER-CABINET MOUNT.
ADAPTE POUR SOUS-CABINET MOUNT.
SUITABLE FOR DAMP LOCATION.
ADAOTE POUR DES ENDROITS HUMIDES.
SUITABLE FOR CONTINUOUS ROW MOUNTING.
ADAPTE POUR CONTINU ROW MONTAGE.

STARTEK
ARCHITECTURAL LIGHTING

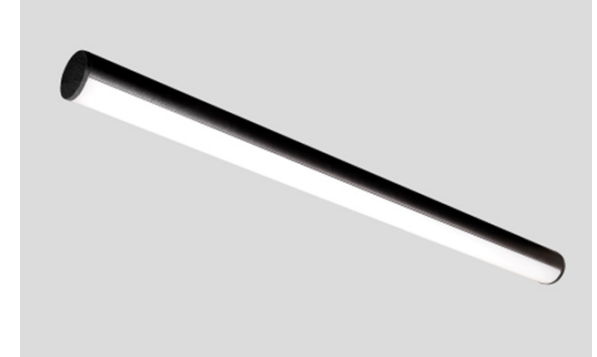

OPTIMO D
OPTIMO DI


Note: All pictures shown are of
the Optimo D

INSTALLATION INSTRUCTIONS

Individual Pendant Mount (ACxxx)

1


Power must be turned off prior to disconnecting or reconnecting fixture.

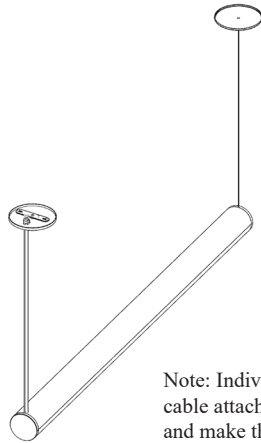

Note: Individual fixture will come with aircraft cable attached. Mount fixture to the structure and make the proper connections. The mount height is adjusted at the canopy

2


Locate ceiling mounting points according to supplied client drawing. Connect wire to building mains and then canopy to structure. Remove slack from cord attach strain relief to hole.

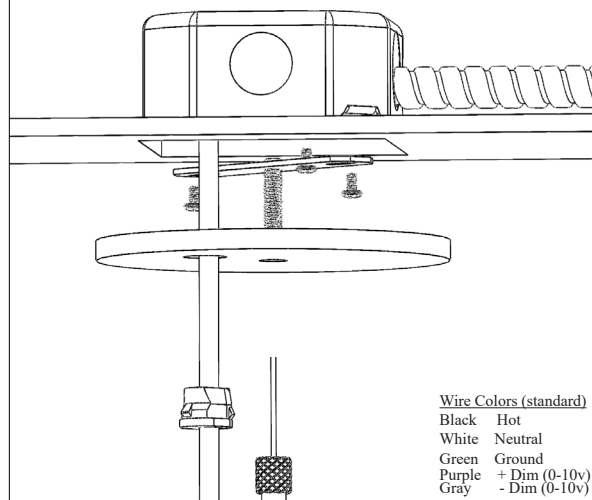

Wire Colors (standard)
Black Hot
White Neutral
Green Ground
Purple + Dim (0-10v)
Gray - Dim (0-10v)


3

Power feed side. Secure canopy (A) with threaded coupler (B) on mounting strap (C)

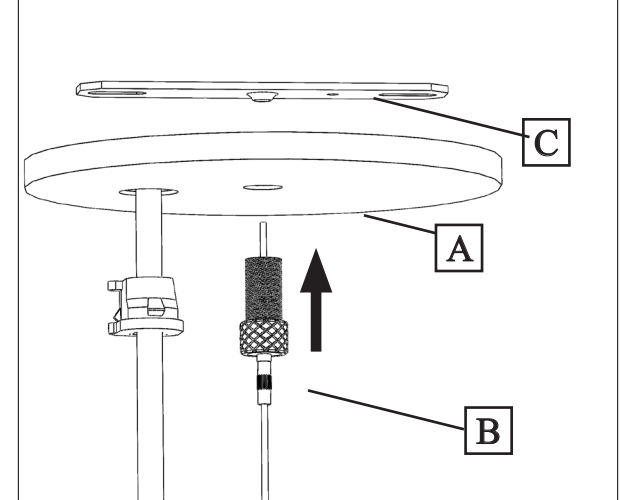


4

Non-power feed side. Secure canopy (D) with cable coupler (E) on mounting strap (F)

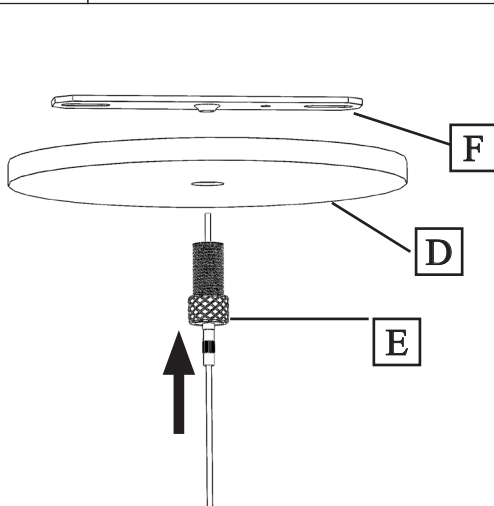


5

Connect power and aircraft cables to canopy

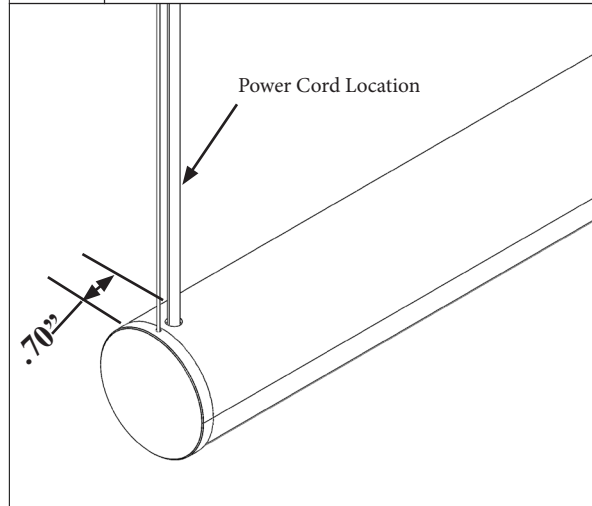







6

Restore power

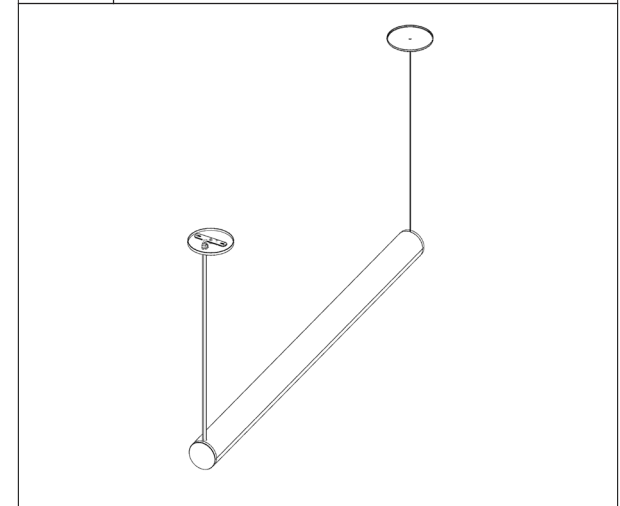

INSTALLATION INSTRUCTIONS

Continuous Pendant Mount (ACxxx)

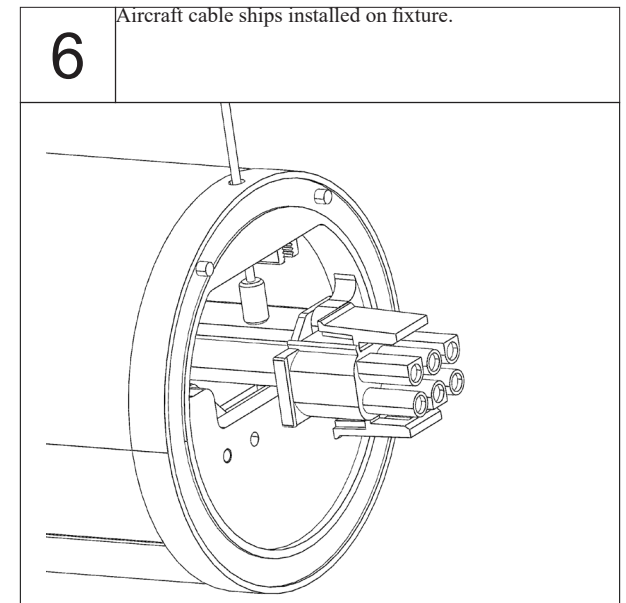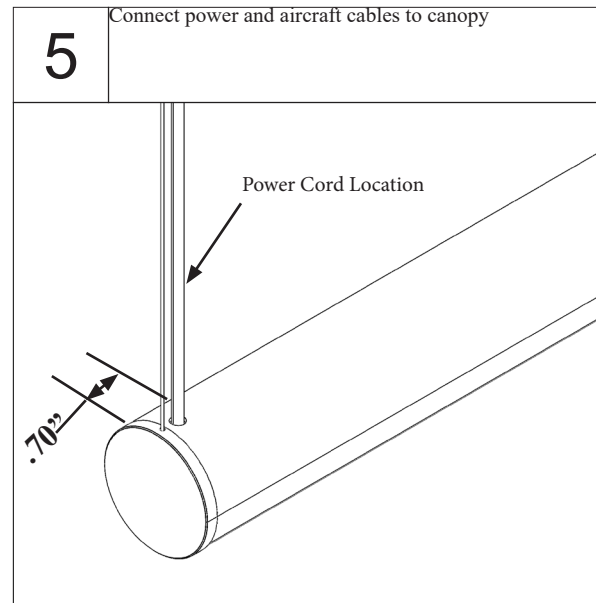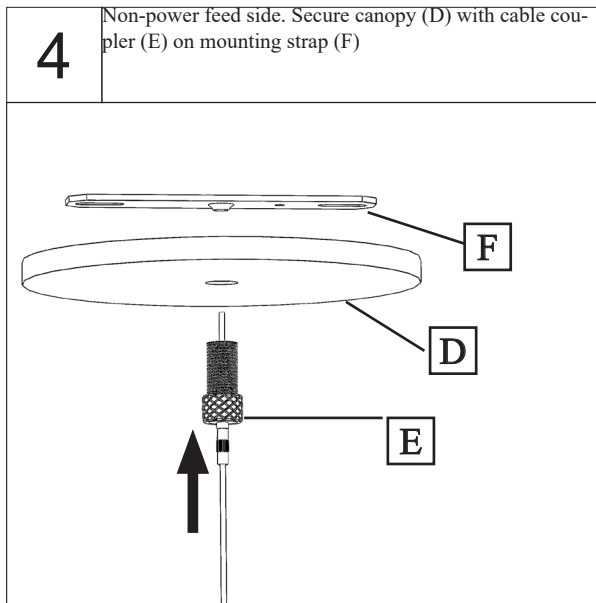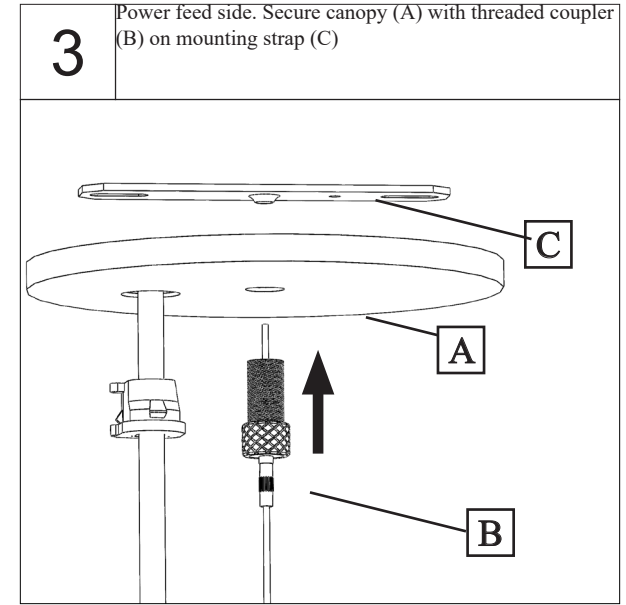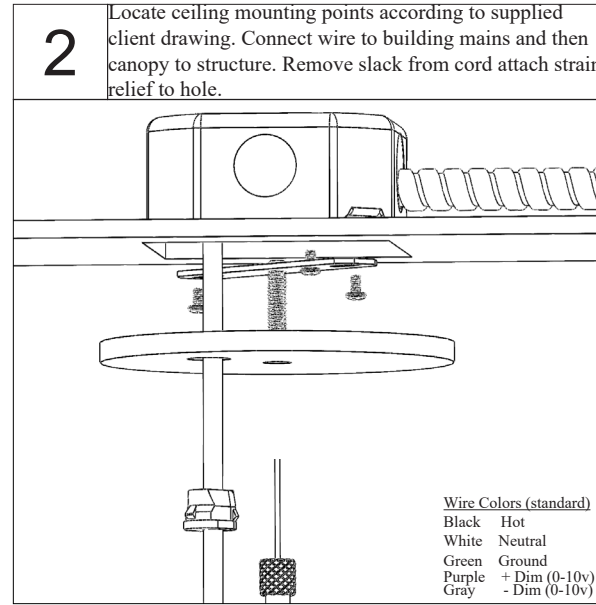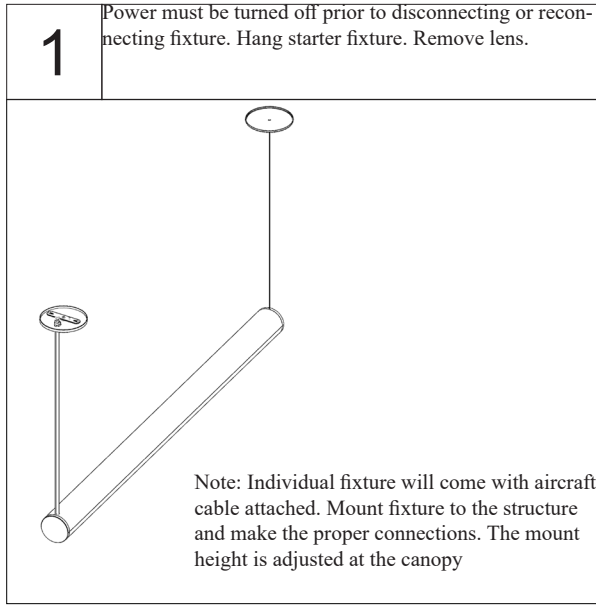


INSTALLATION INSTRUCTIONS

Continuous Pendant Mount Cont. (ACxxx)


7

Hang middle fixture. Remove lens. Repeat steps 4&6.

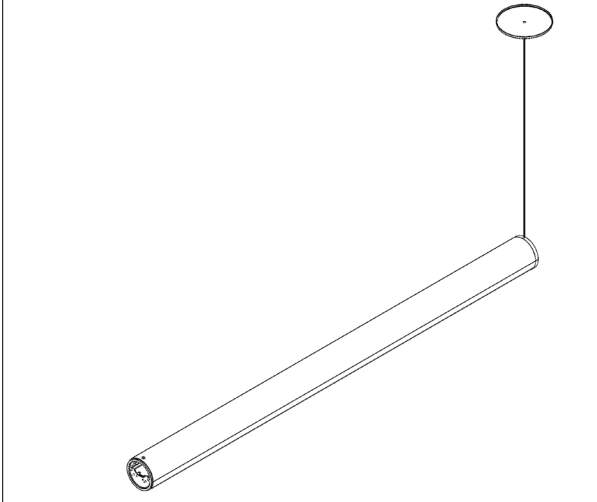


8

Connect harness

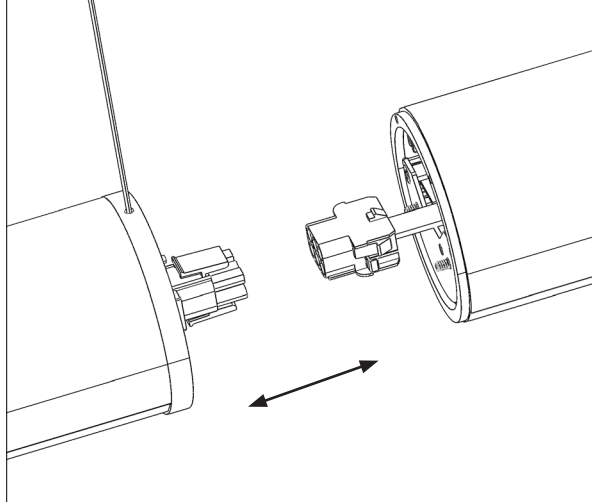


9

Secure fixture with 4 screws into linking plate.

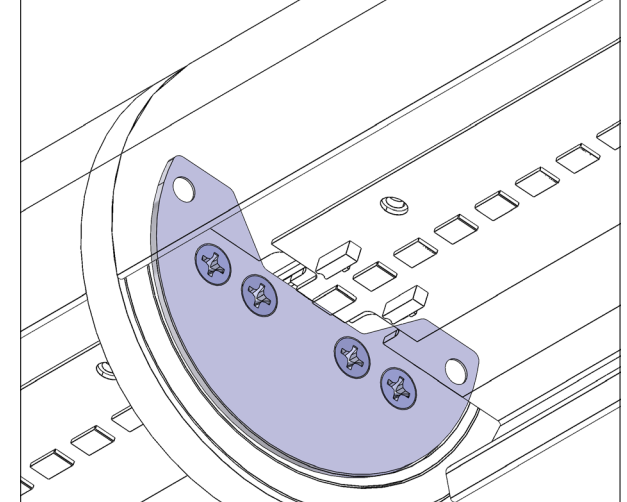


10

Hang end fixture. Remove lens. Repeat steps 4,6-9

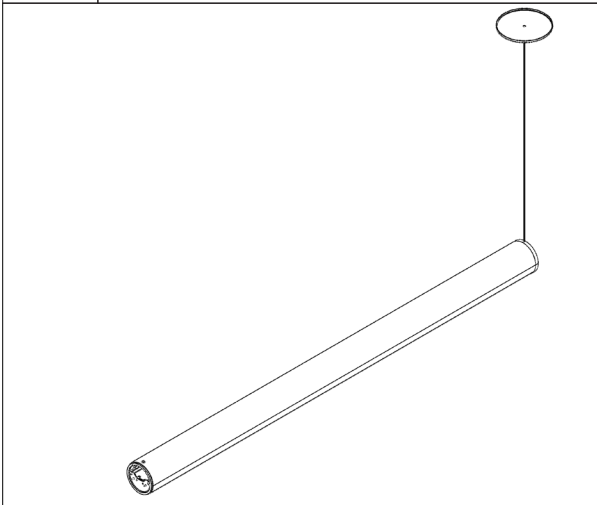


11

Snap in lens

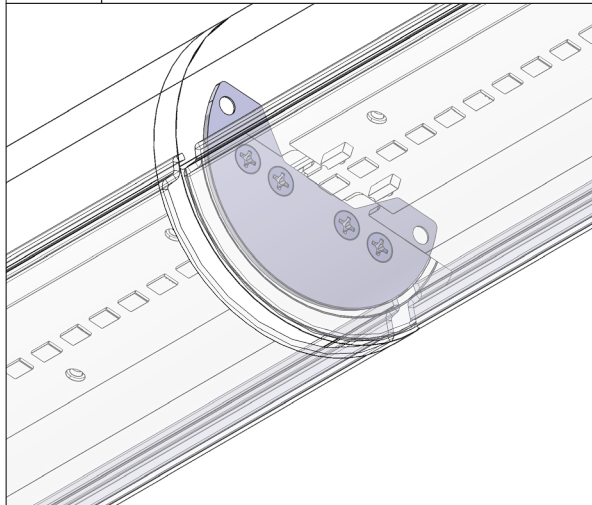







12

Restore power

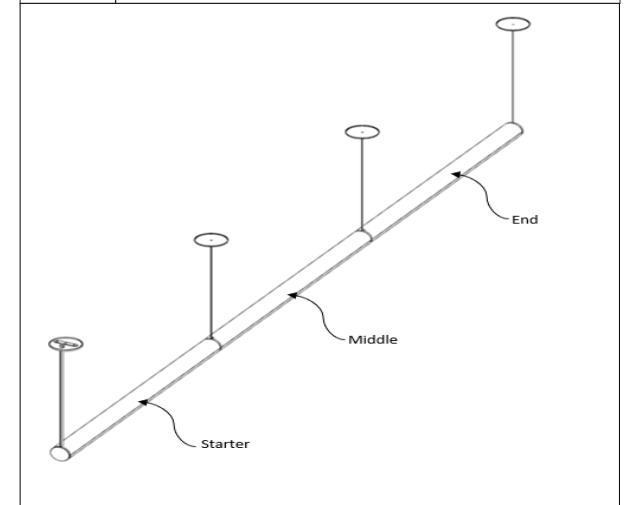







INSTALLATION INSTRUCTIONS

Individual Stem Mount with Canopy (SMC)

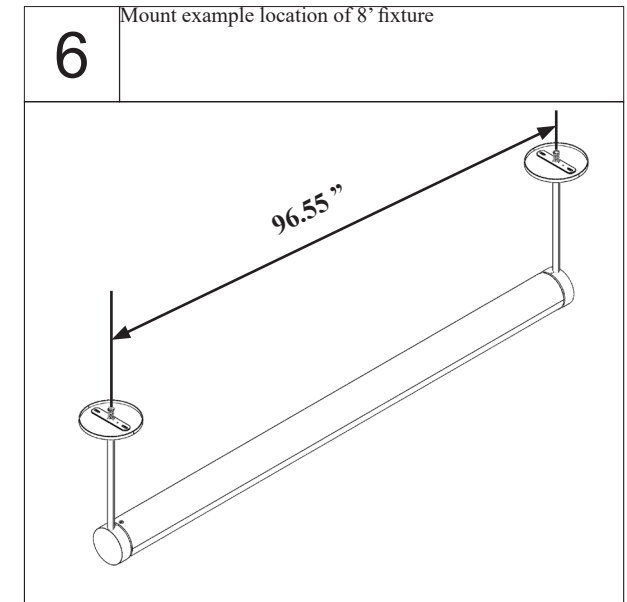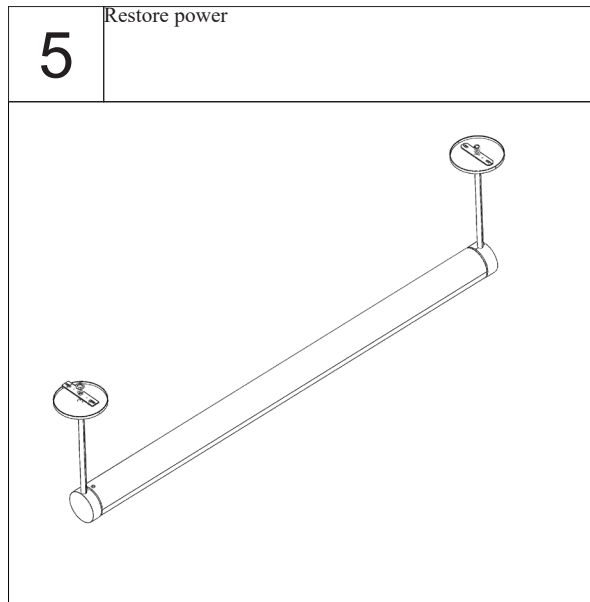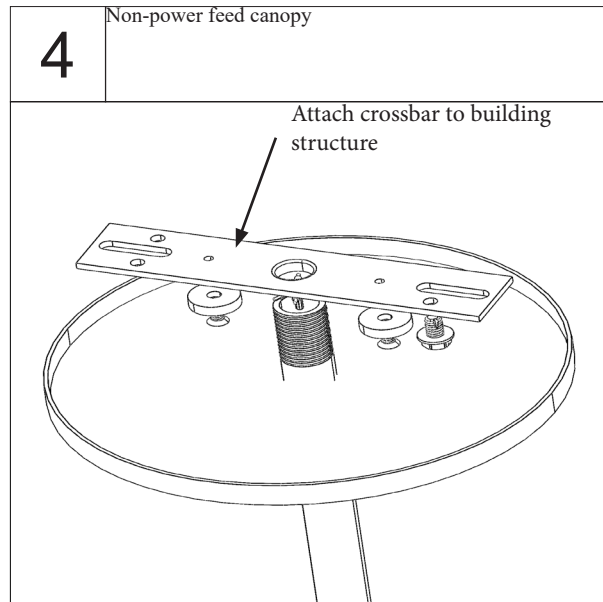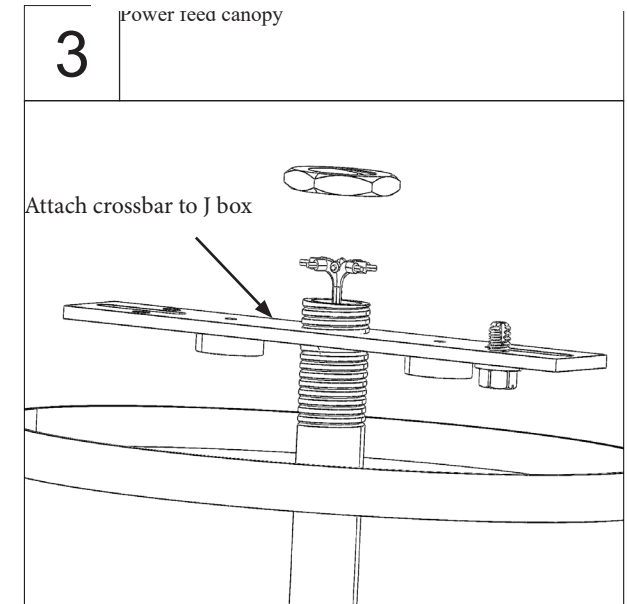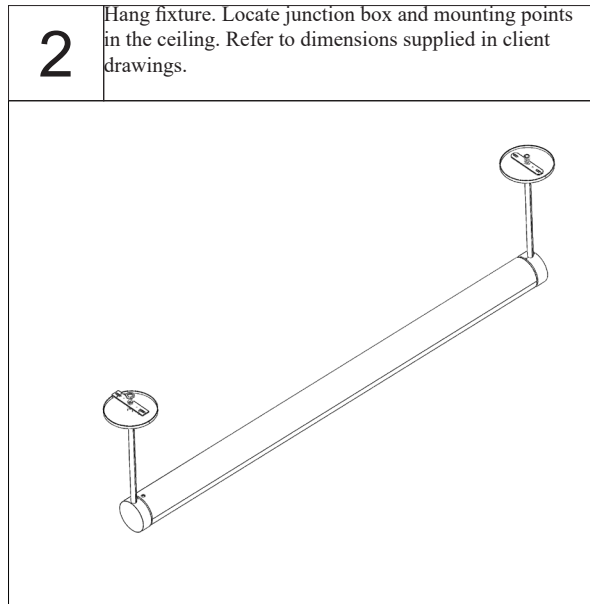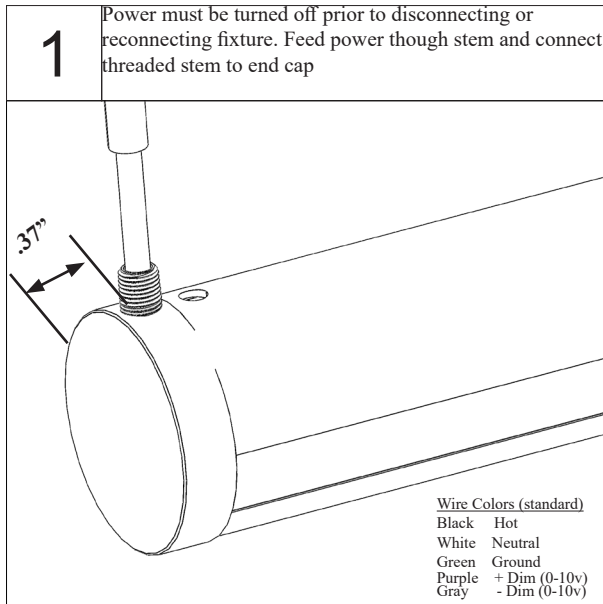






INSTALLATION INSTRUCTIONS

Continuous Stem Mount with Canopy (SMC)

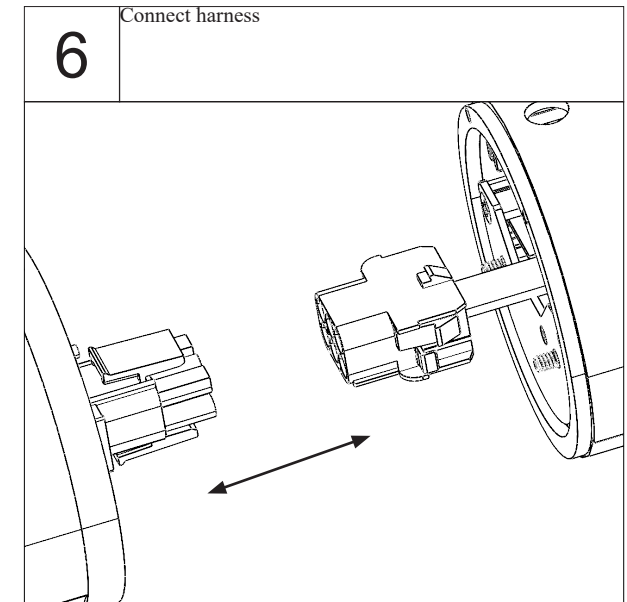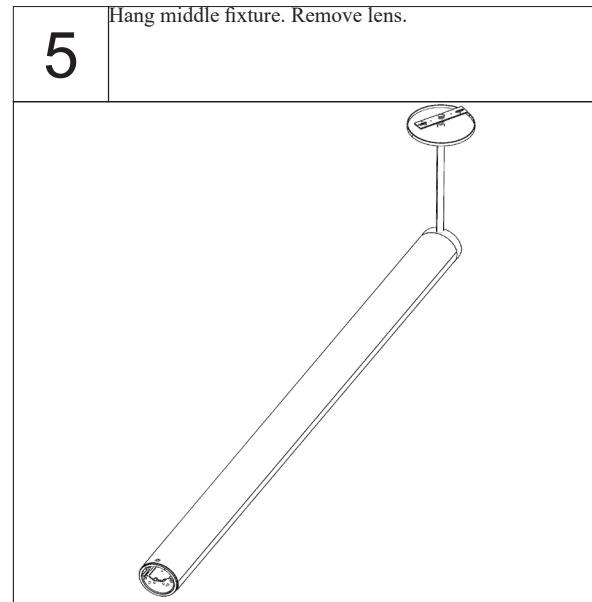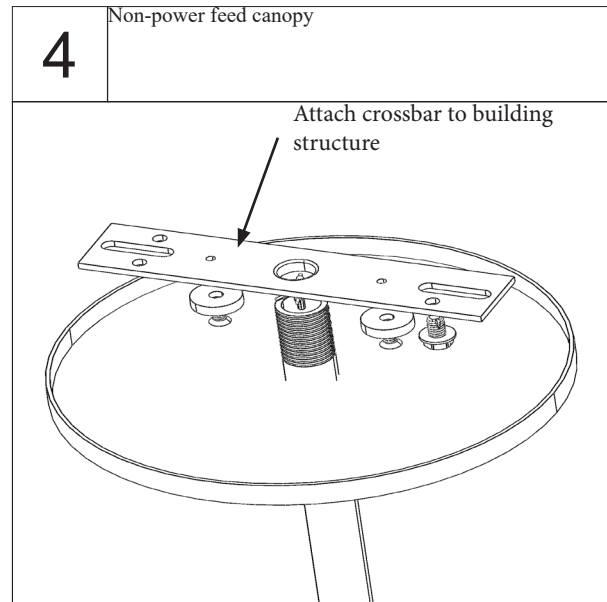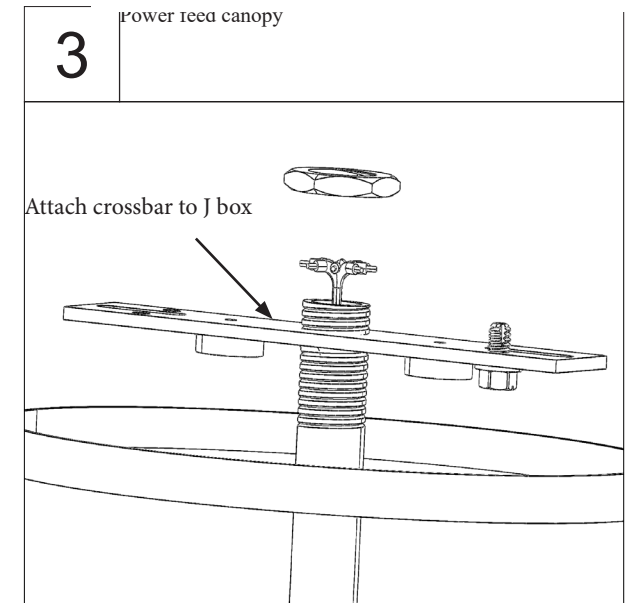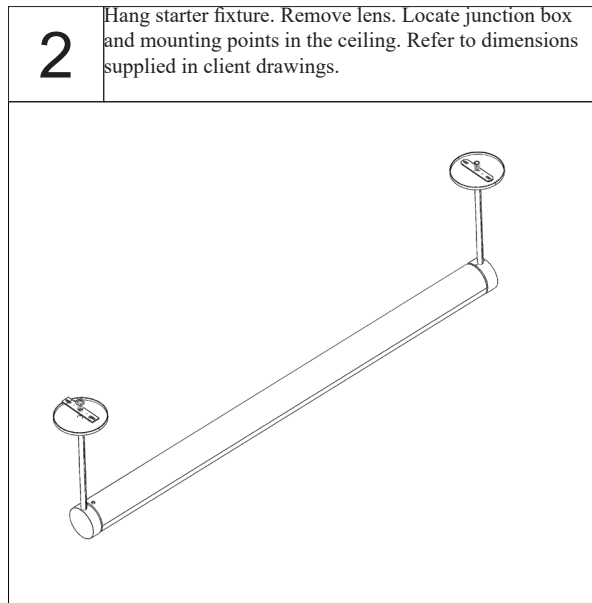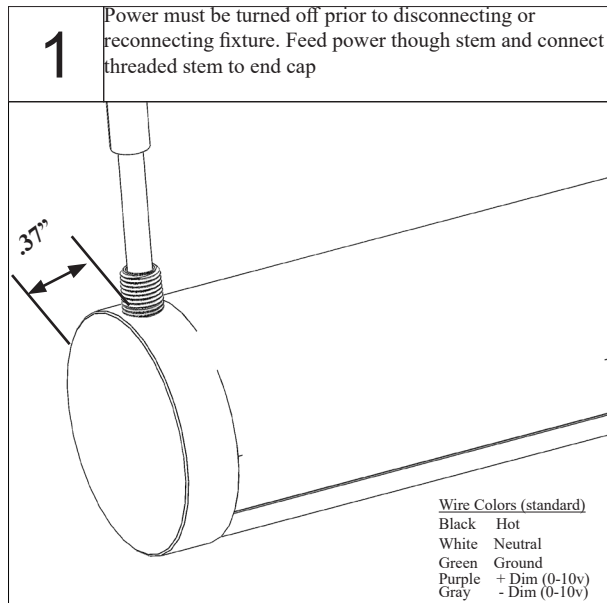




INSTALLATION INSTRUCTIONS

Continuous Stem Mount with Canopy Cont. (SMC)

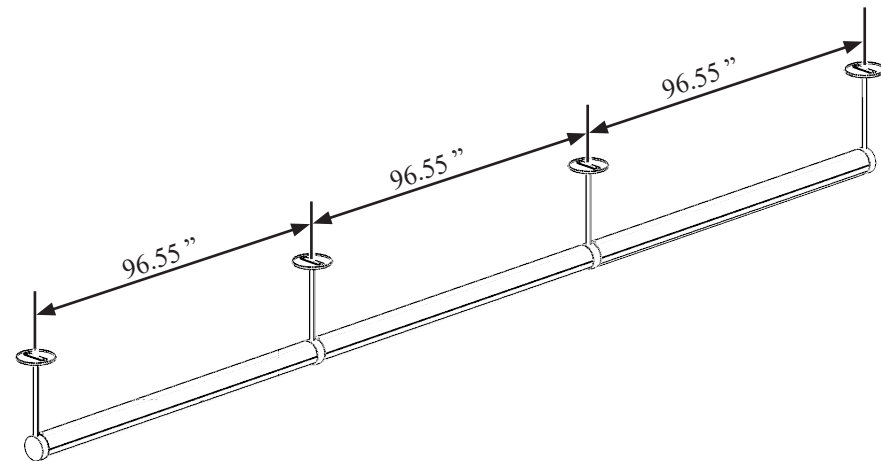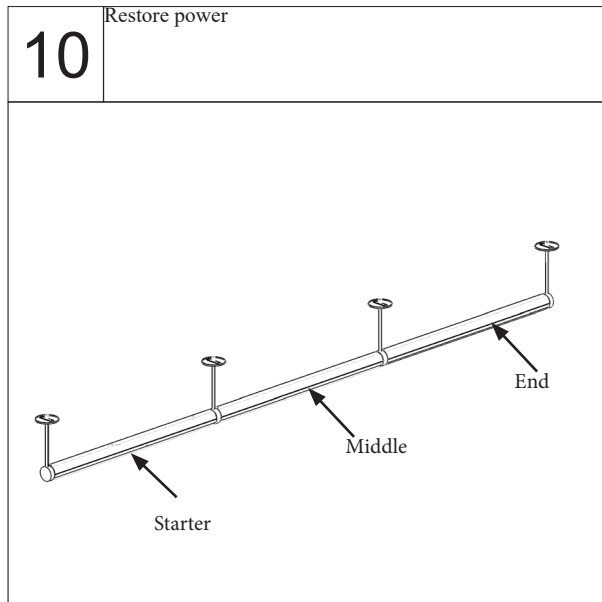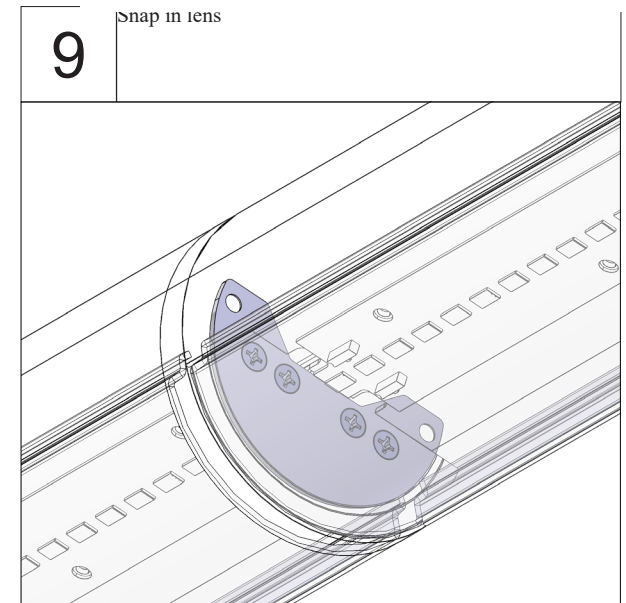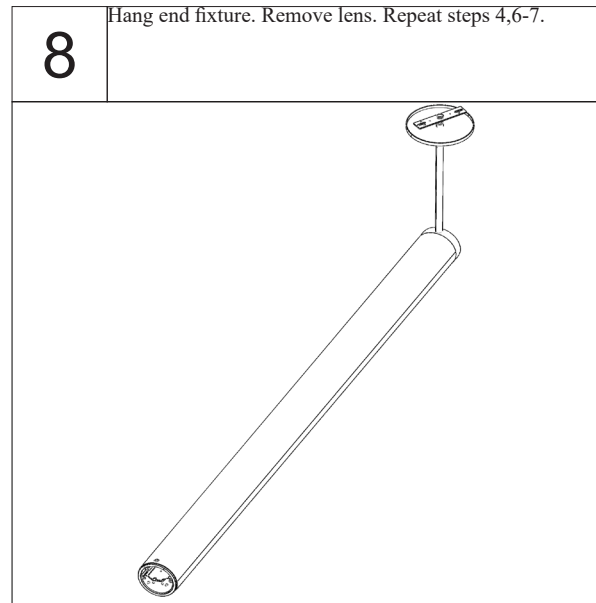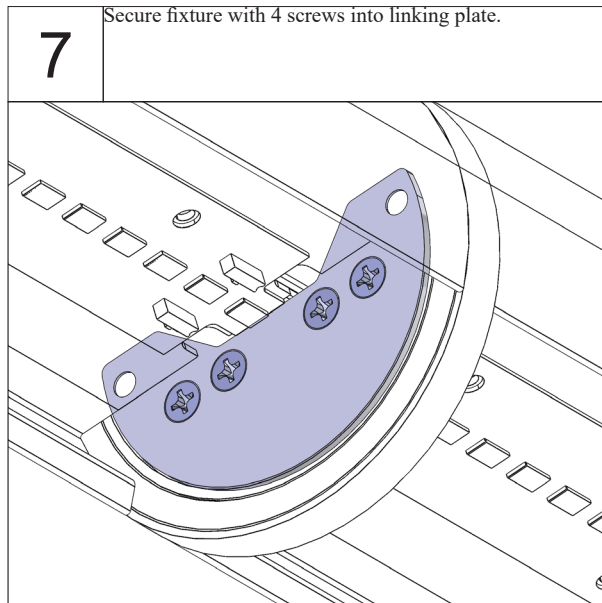







INSTALLATION INSTRUCTIONS

Individual Wall Mount Instructions: (WM)

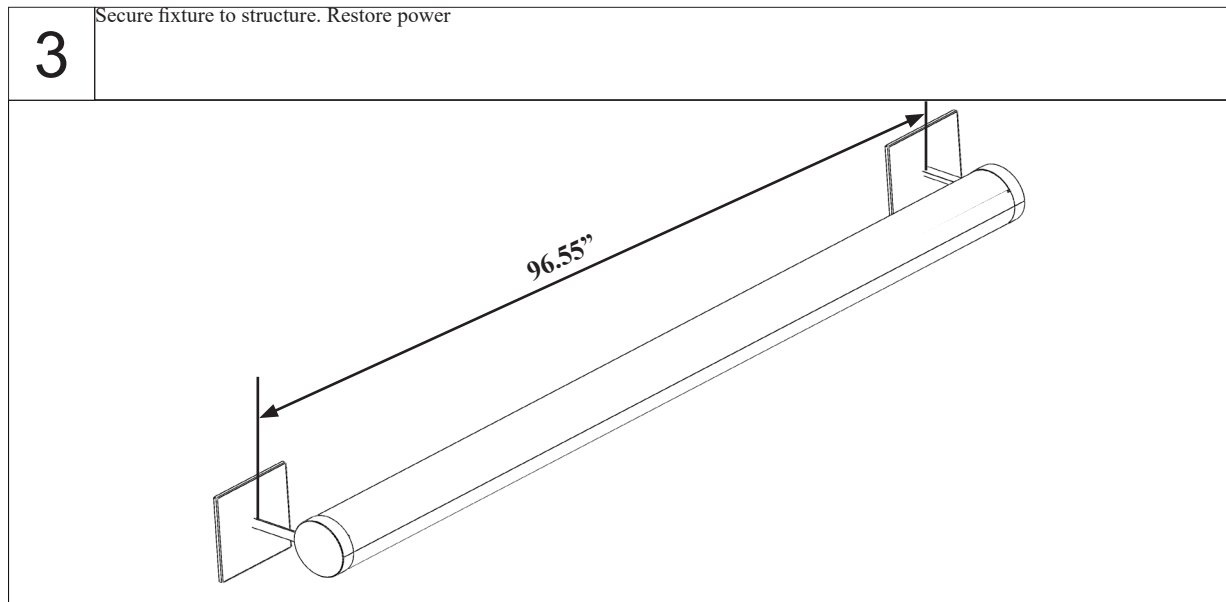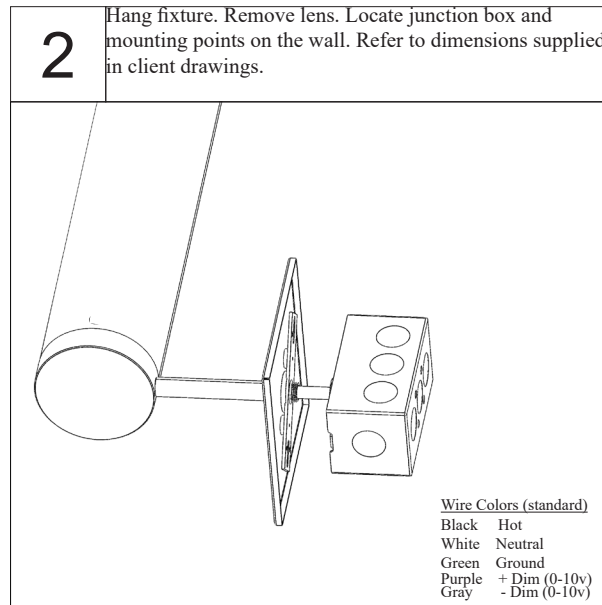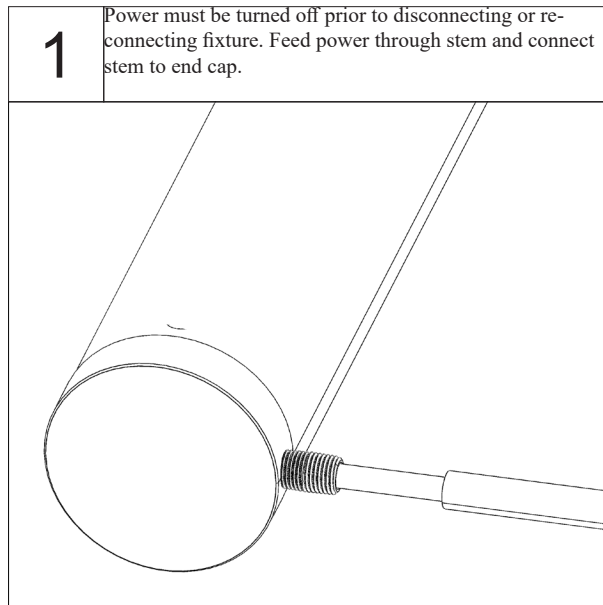

INSTALLATION INSTRUCTIONS

Continuous Wall Mount Instructions:(WM)

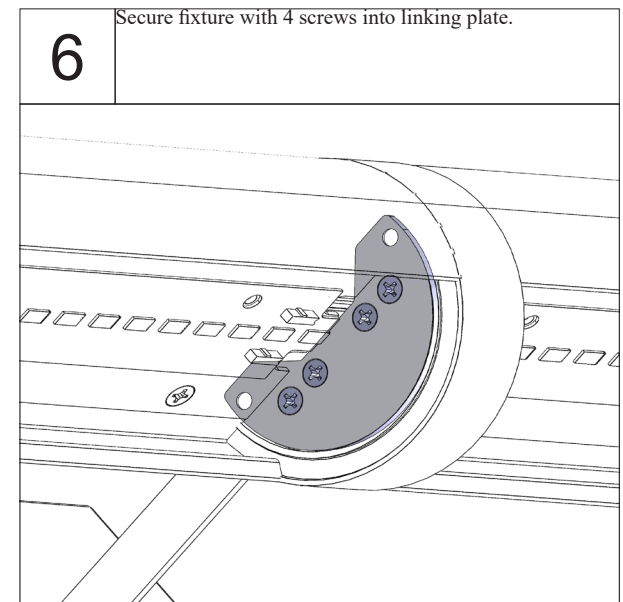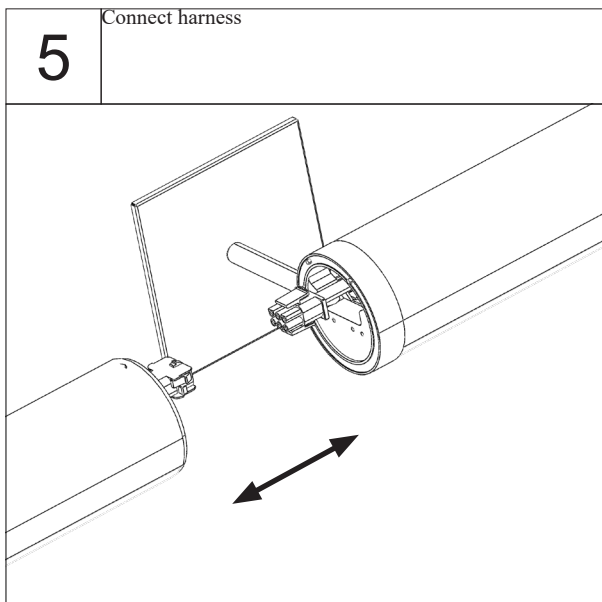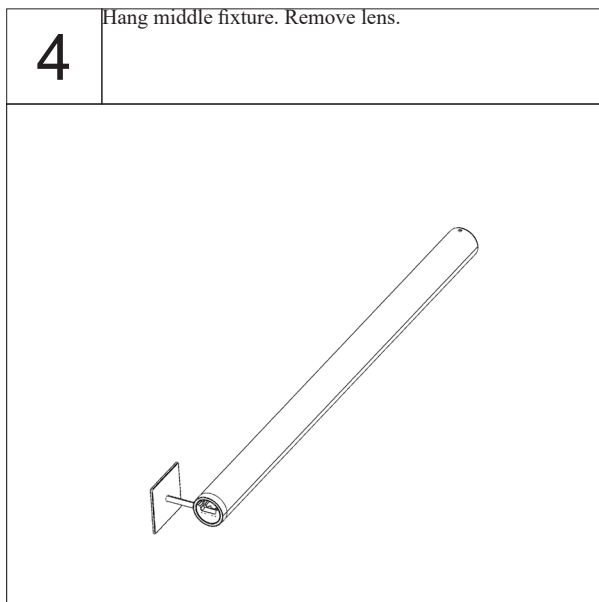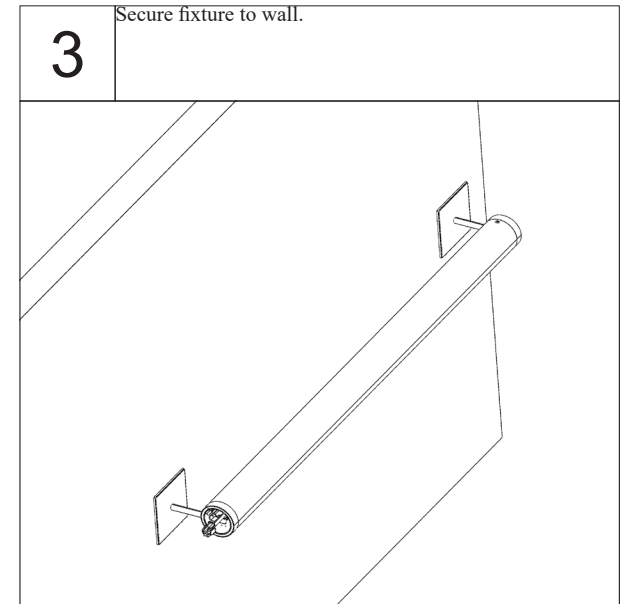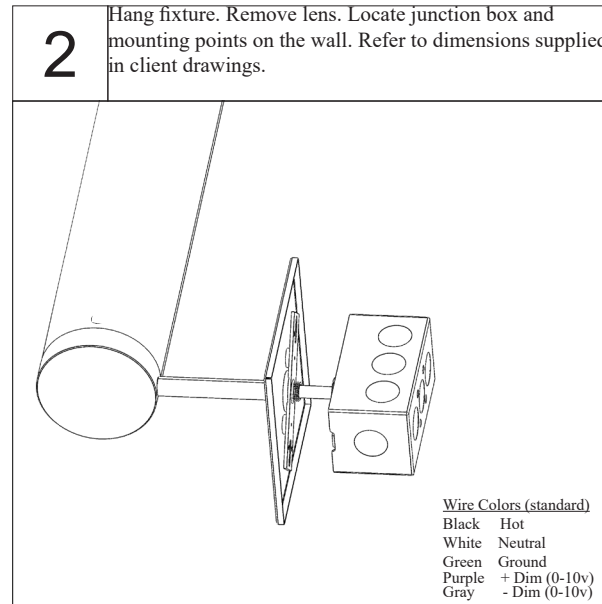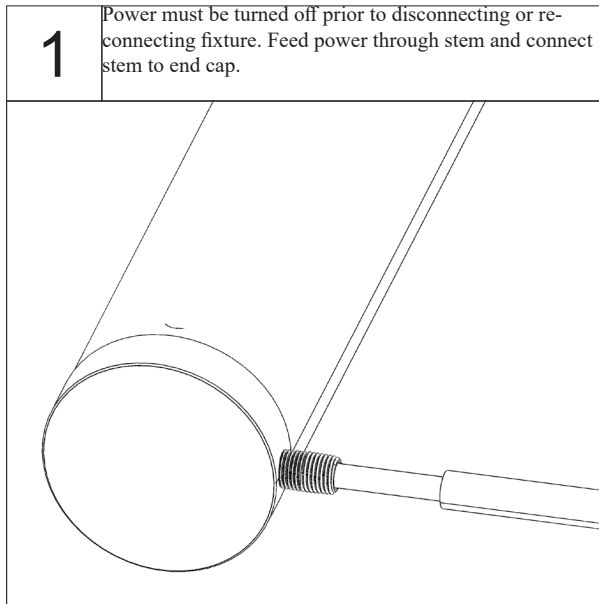


INSTALLATION INSTRUCTIONS

Continuous Wall Mount Instructions Cont. (WM)



7

Hang end fixture. Remove lens. Repeat steps 5 & 6.

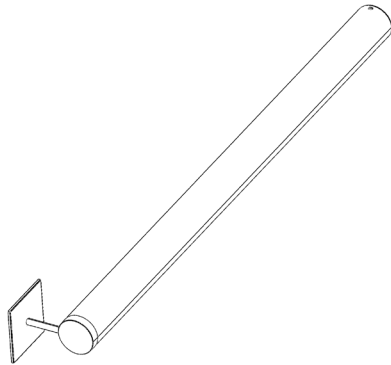





8

Restore power

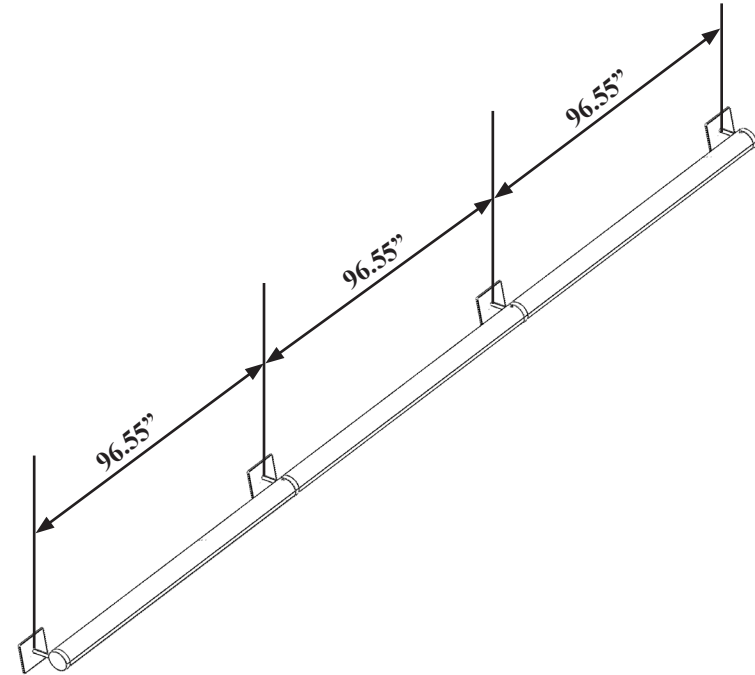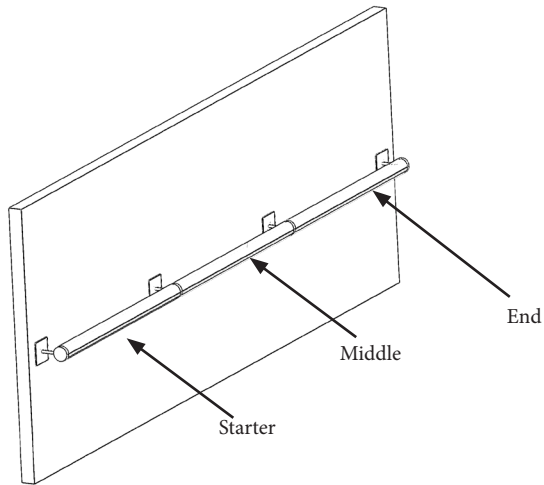







INSTALLATION INSTRUCTIONS

Individual Rotational Wall Mount Instructions: (RWM

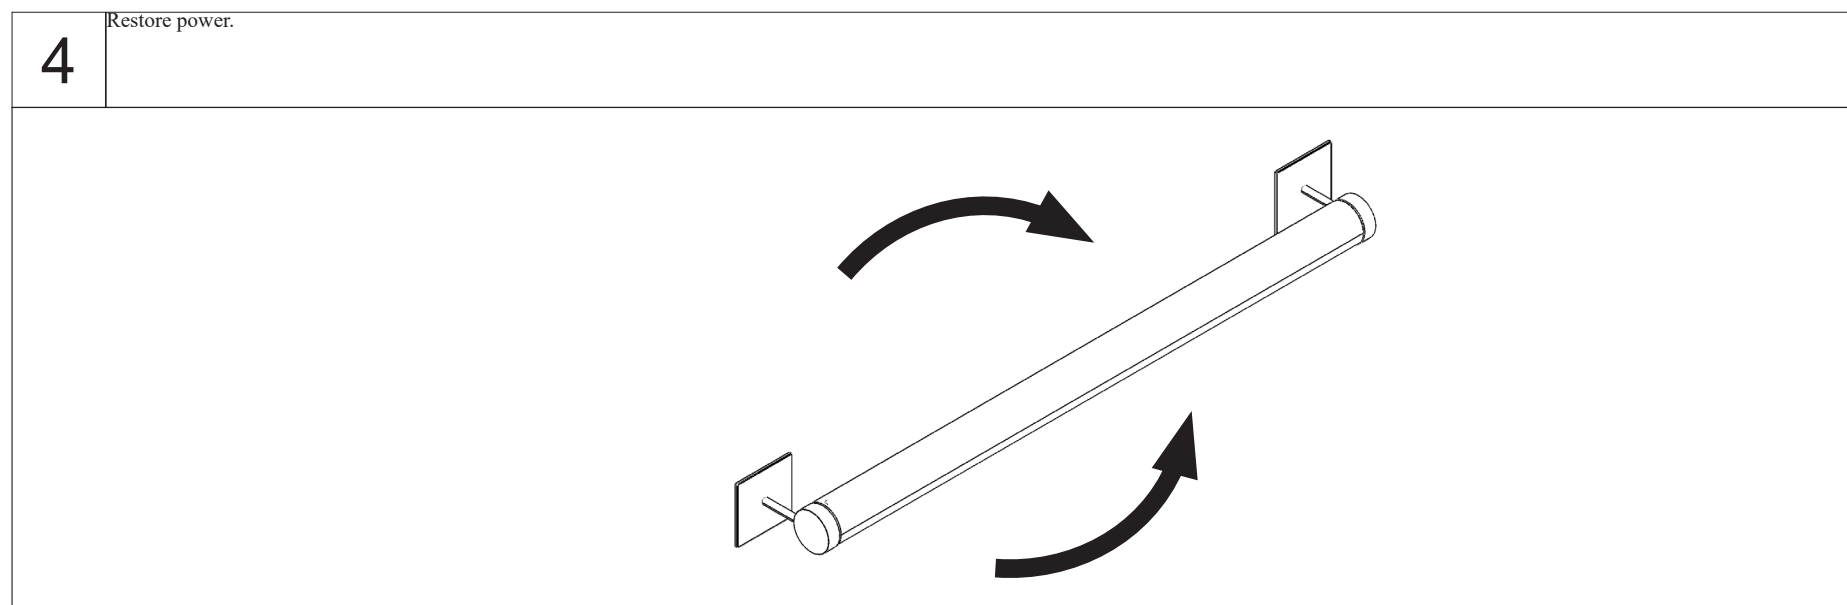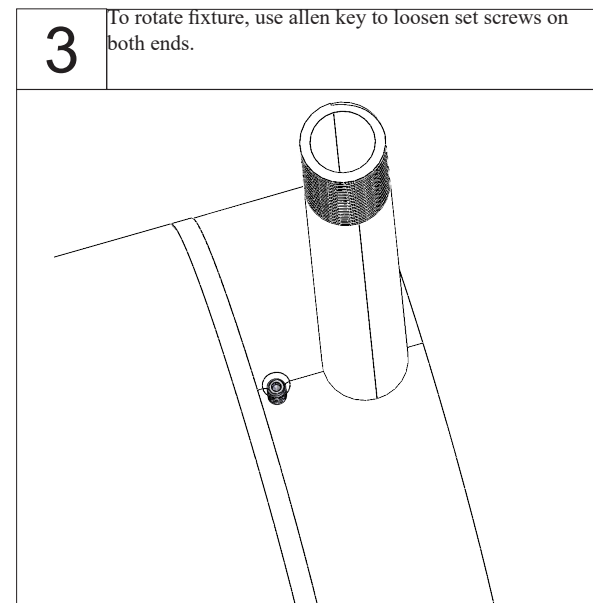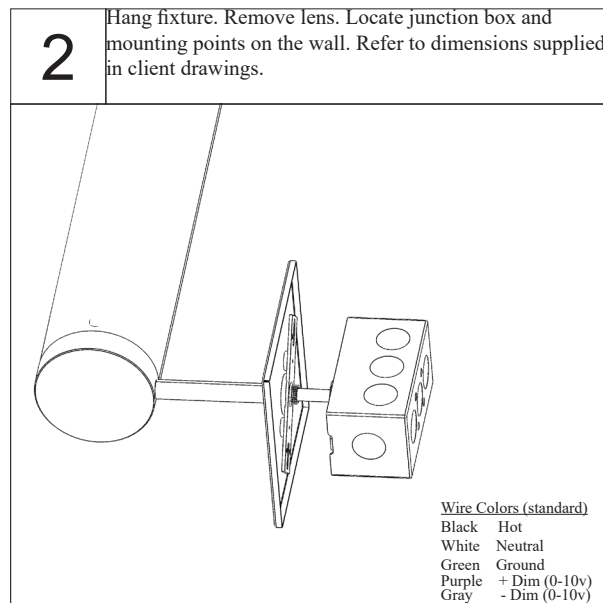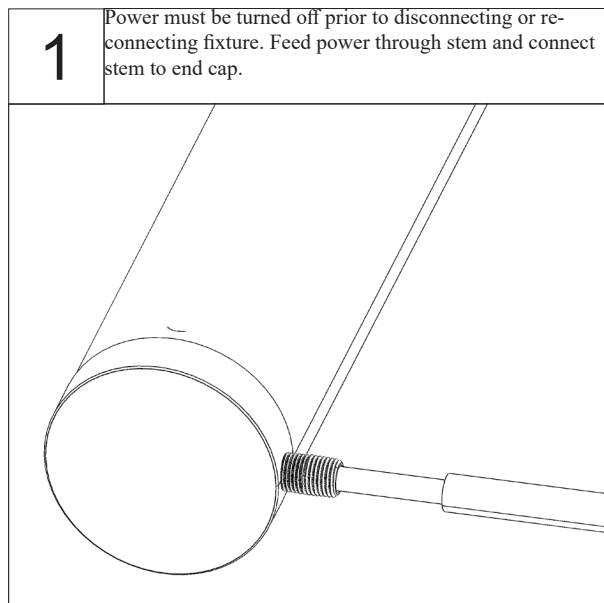





INSTALLATION INSTRUCTIONS

Continuous Rotational Wall Mount Instructions: (RWM)

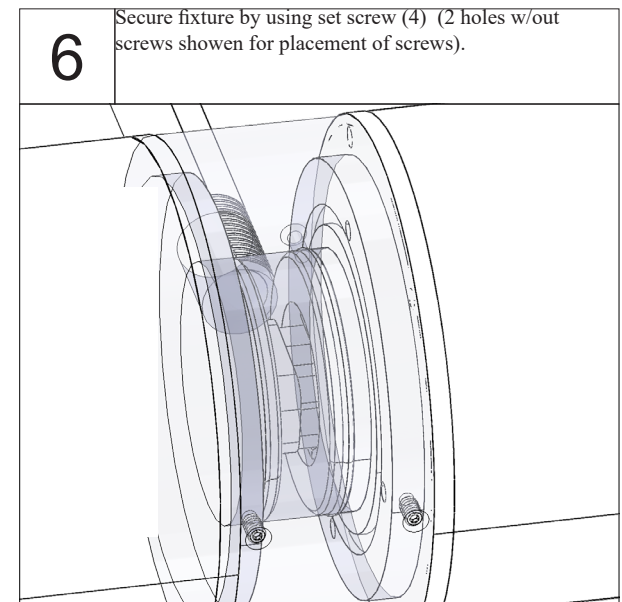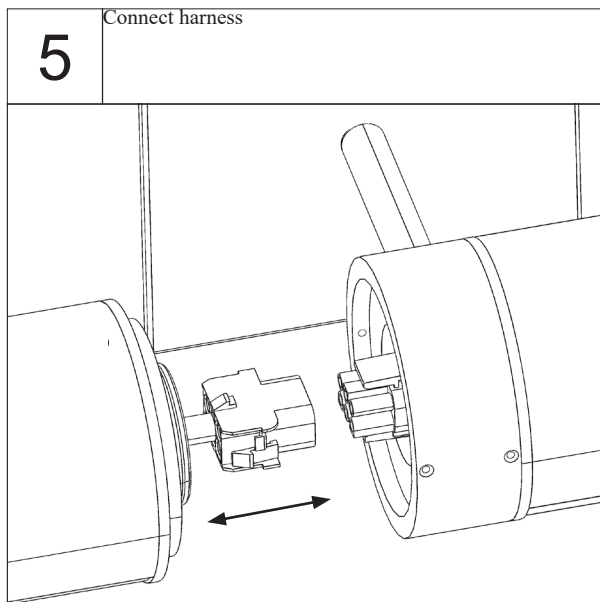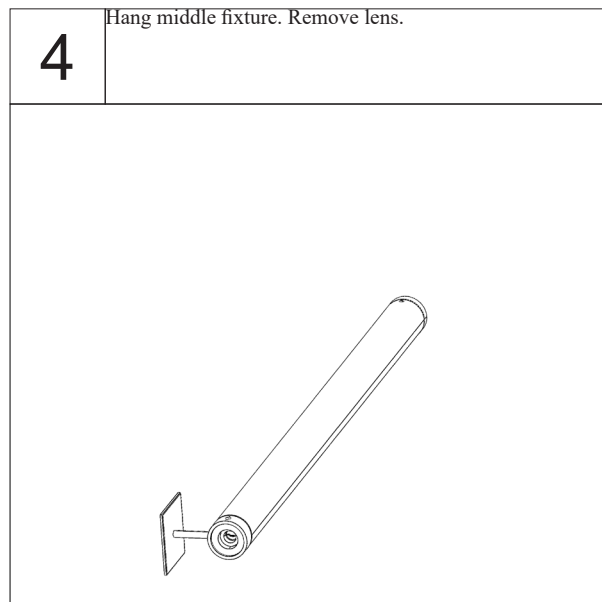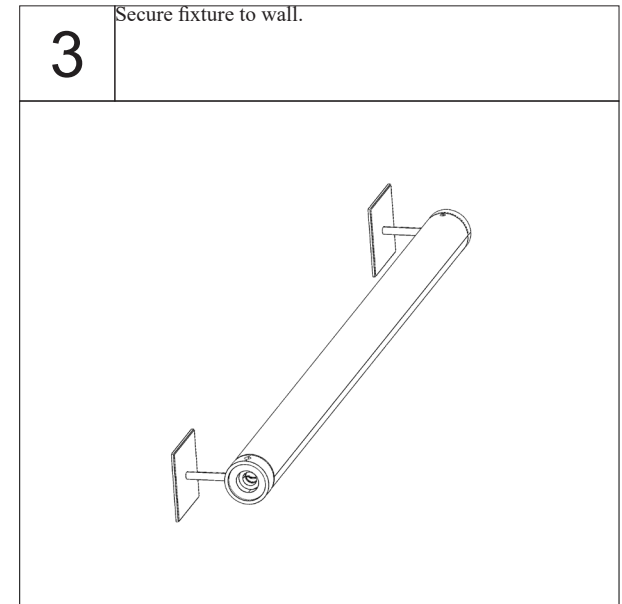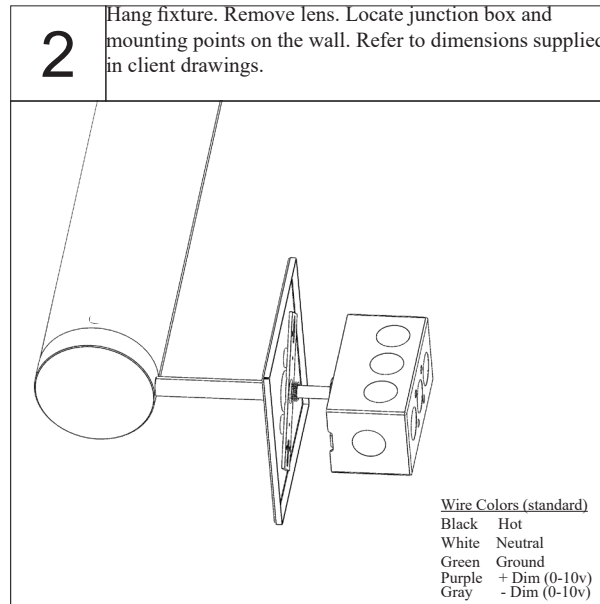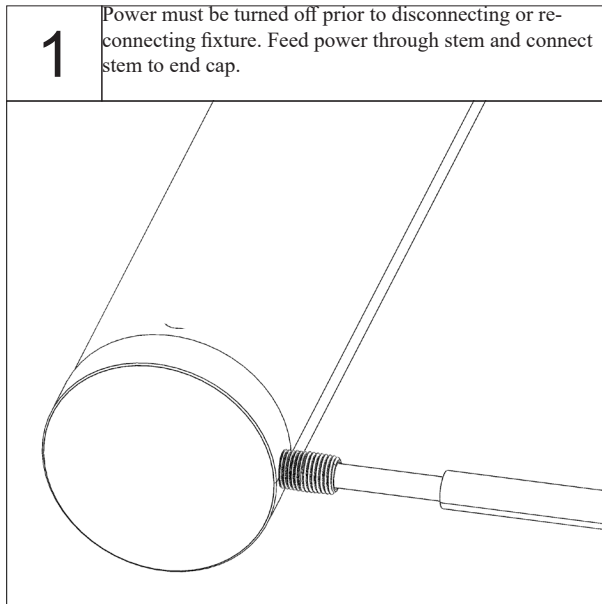







INSTALLATION INSTRUCTIONS

Continuous Rotational Wall Mount Instructions: (RWM)

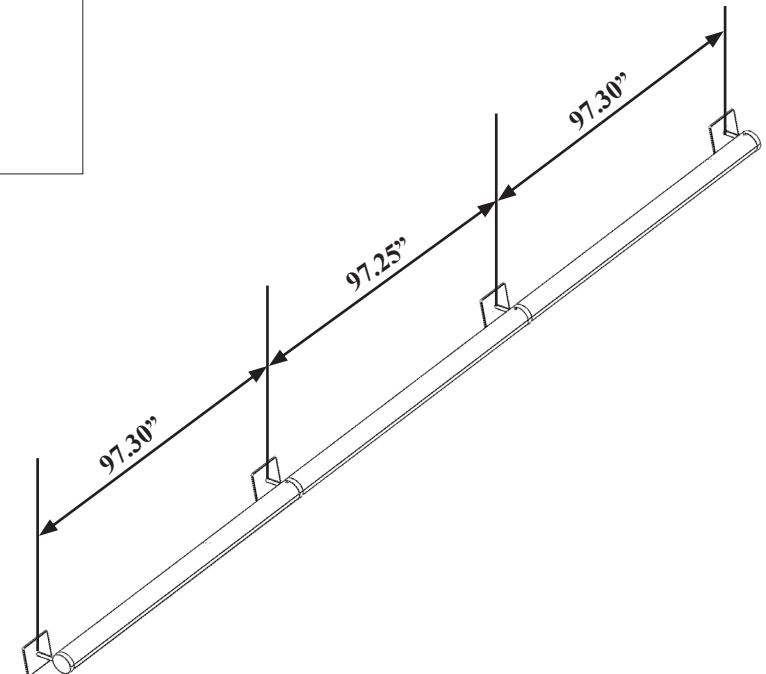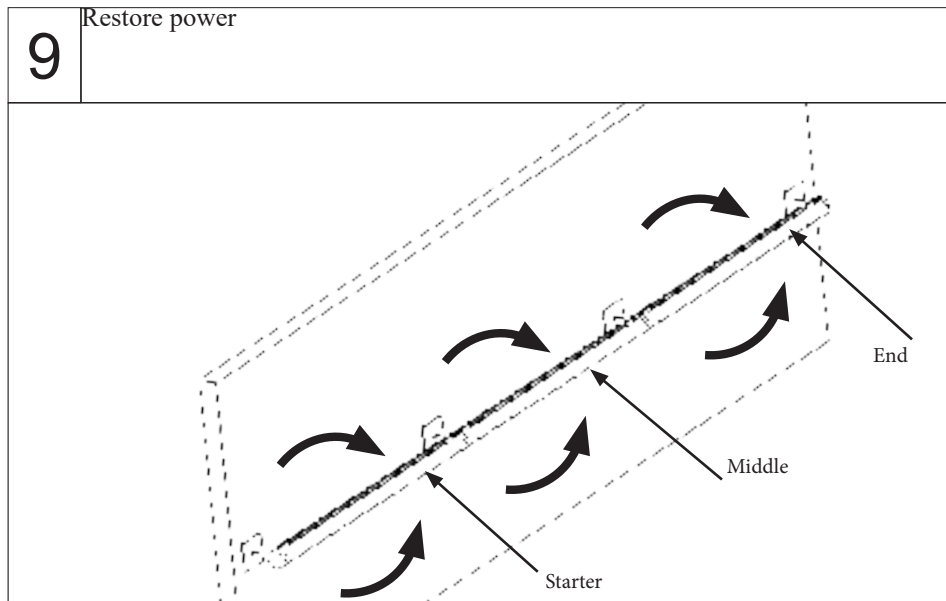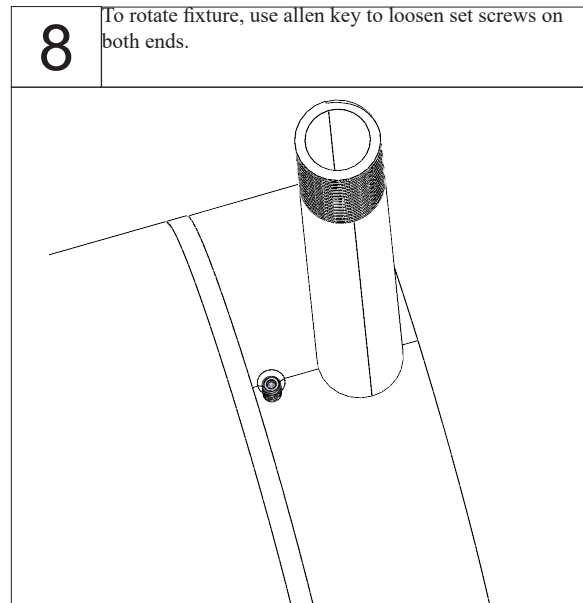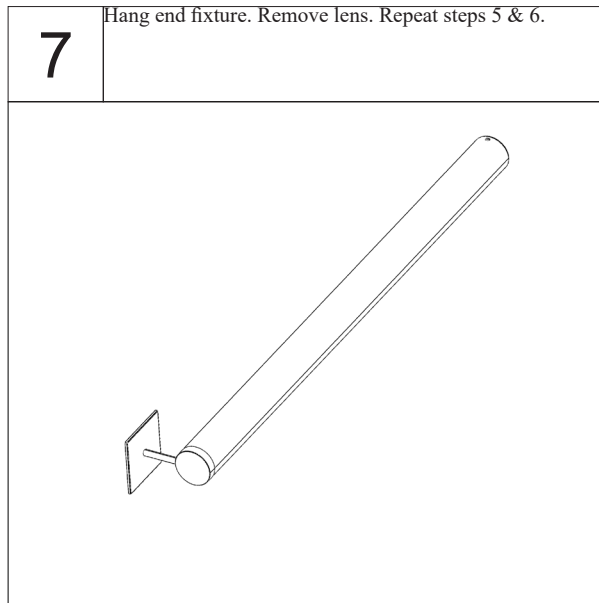







INSTALLATION INSTRUCTIONS

Individual Rotational Stem Mount with Canopy (RSMC)

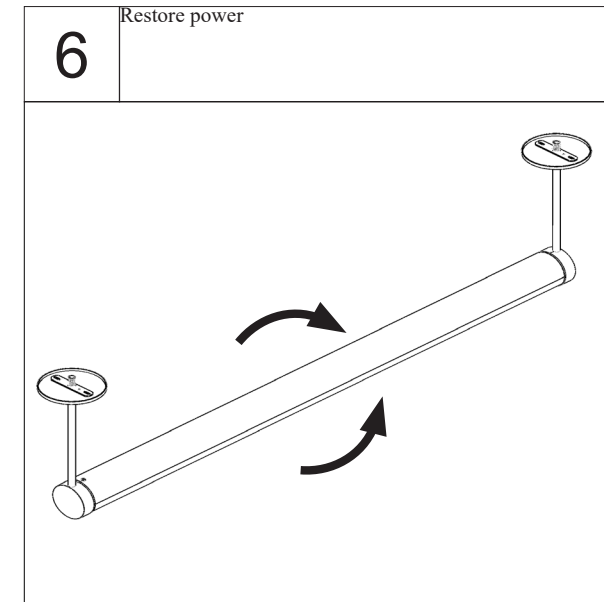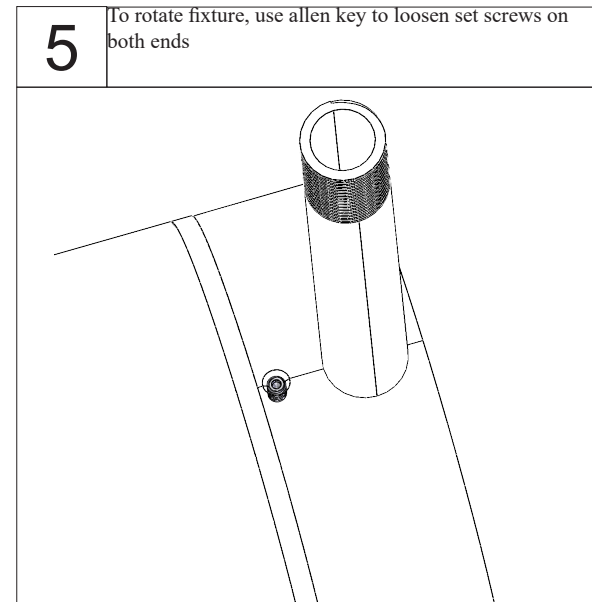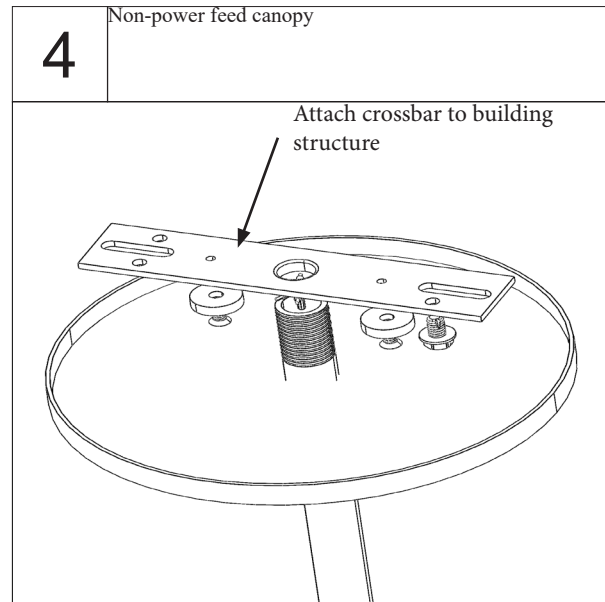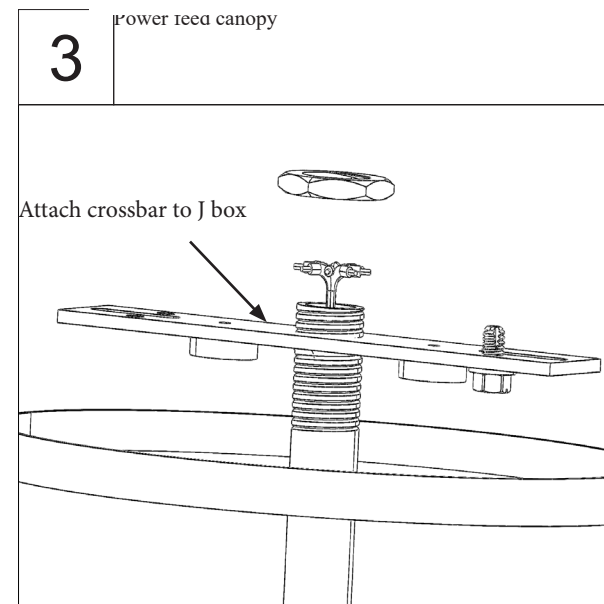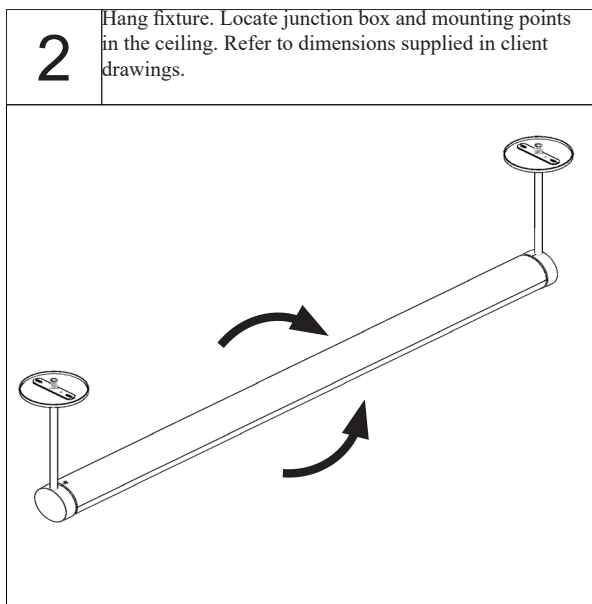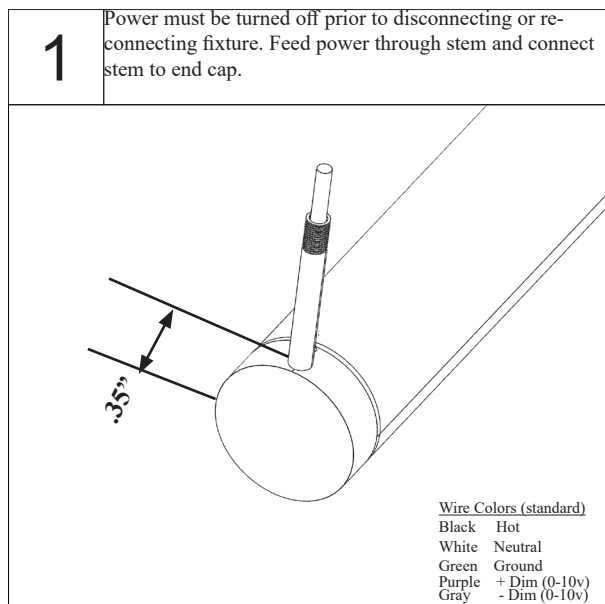





INSTALLATION INSTRUCTIONS

Continuous Rotational Stem Mount with Canopy (RSMC)

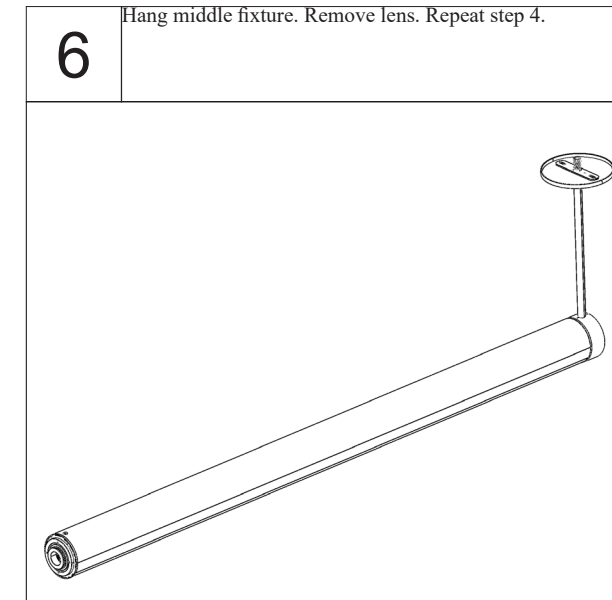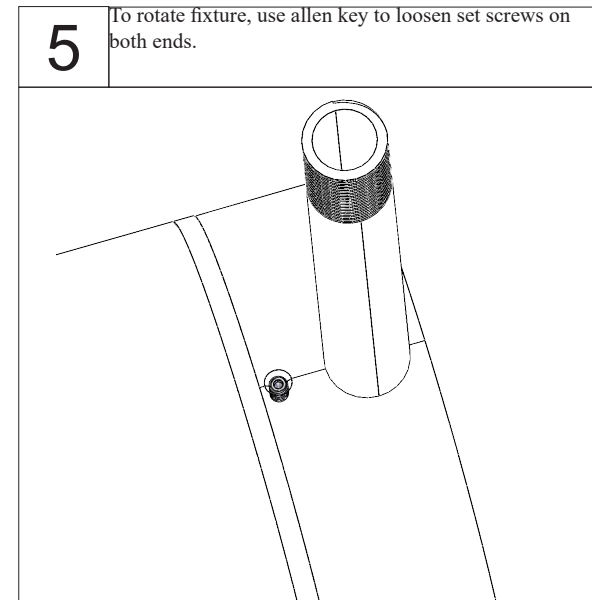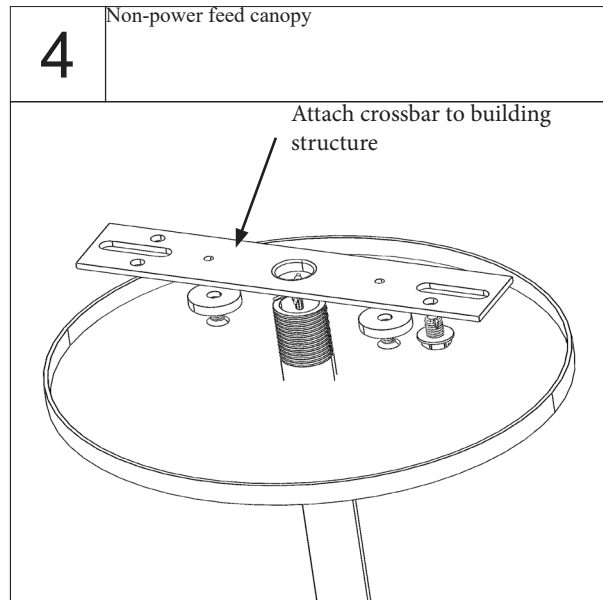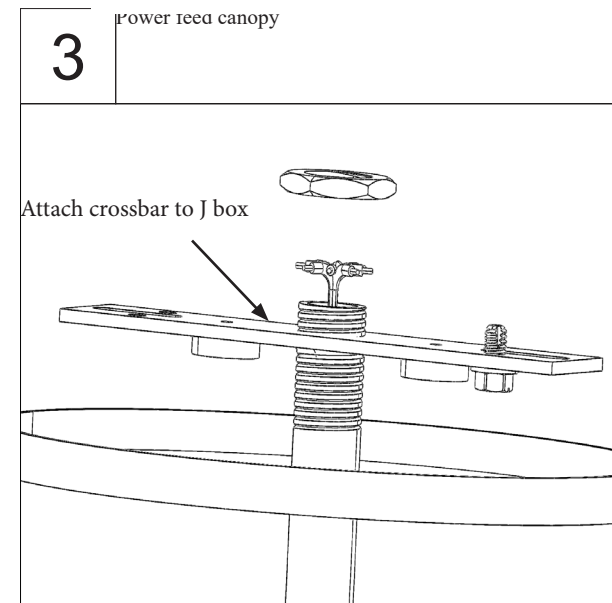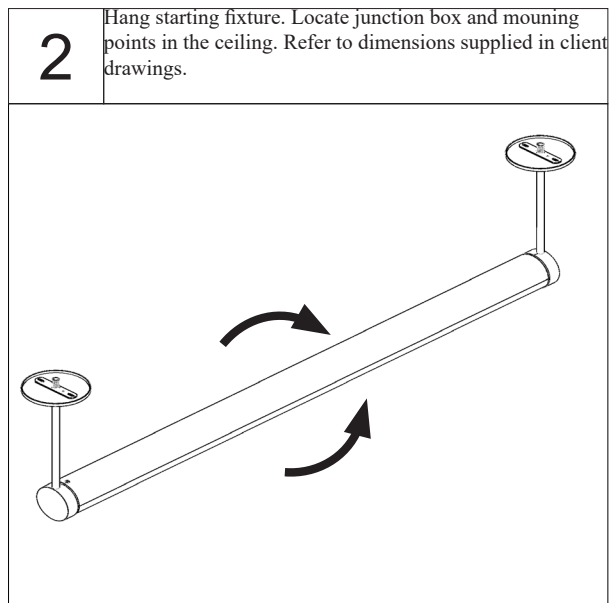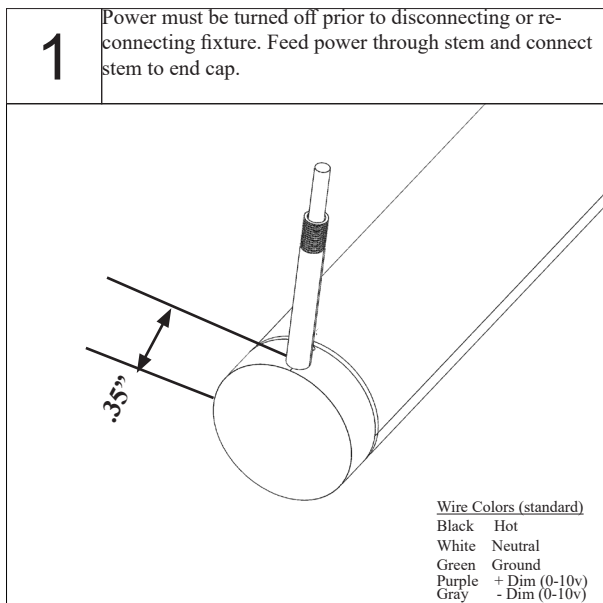

INSTALLATION INSTRUCTIONS


Continuous Rotational Stem Mount with Canopy (RSMC)

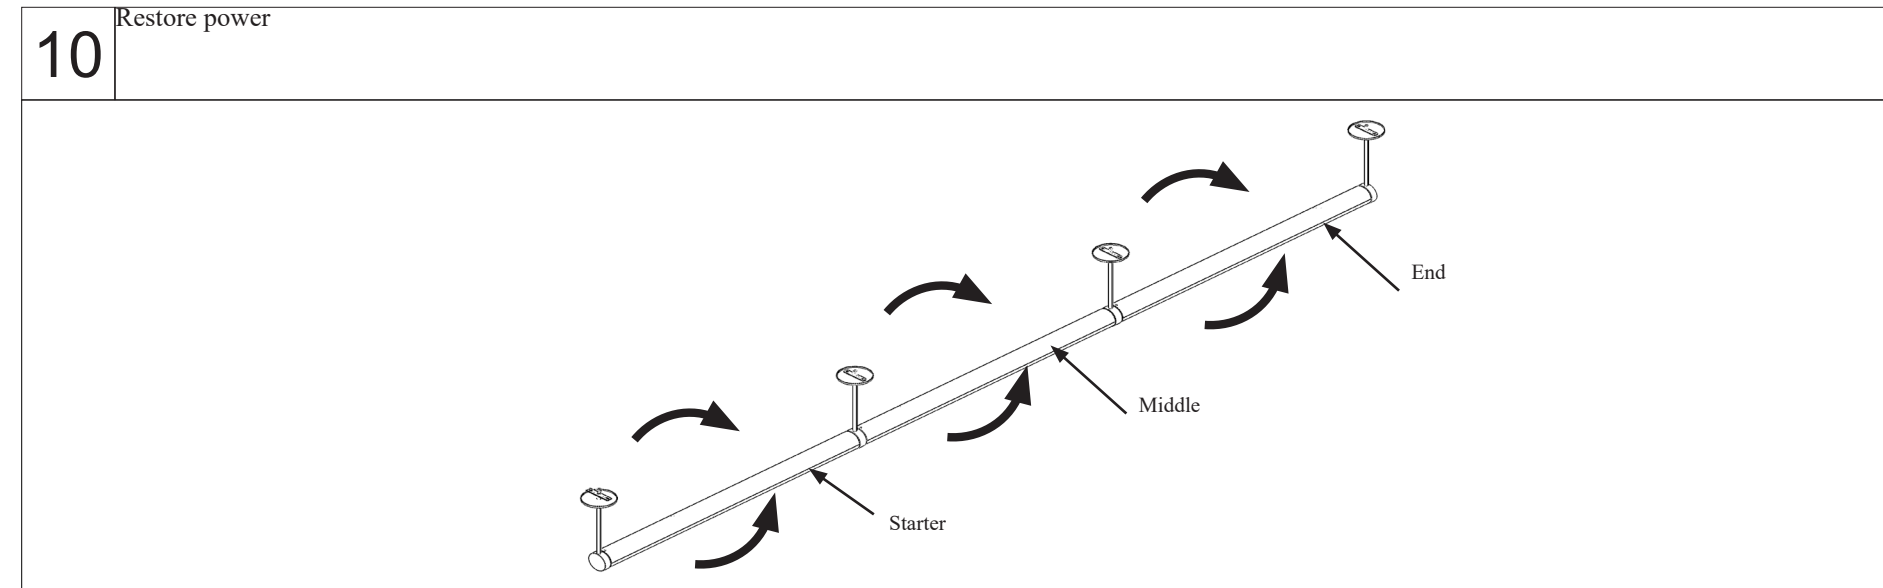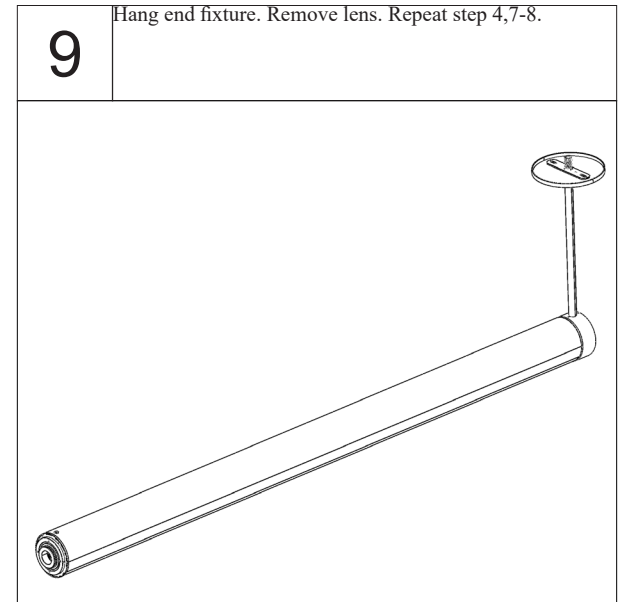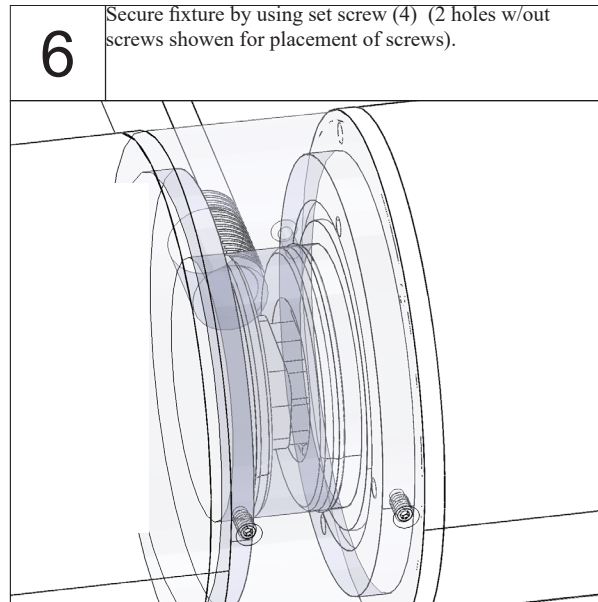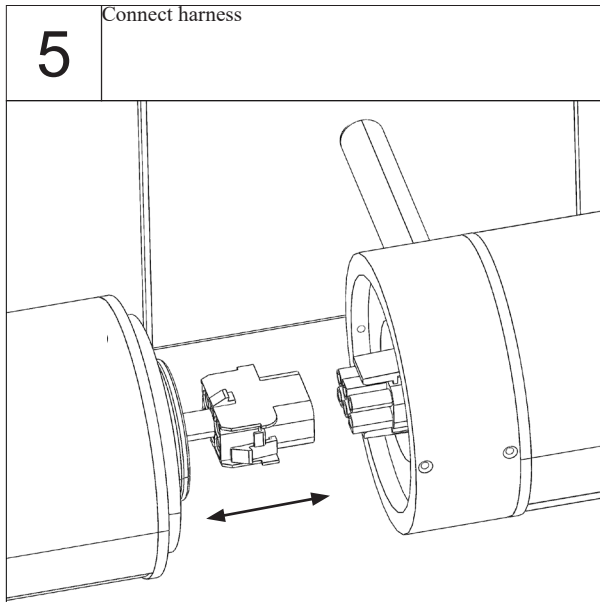


INSTALLATION INSTRUCTIONS

Continuous Rotational Stem Mount with Canopy (RSMC)


Example: 8' Fixture

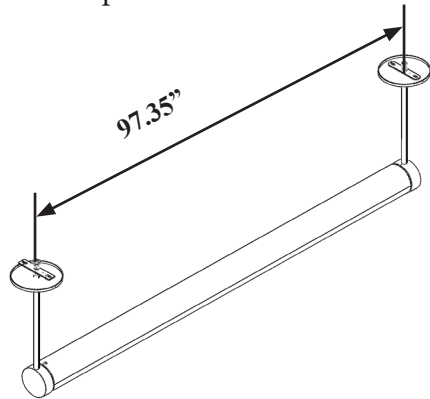

Example: 16' Run

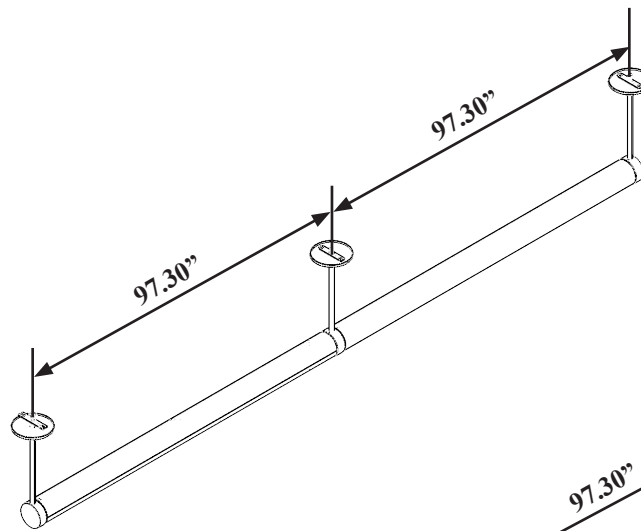

Example: 24' Run

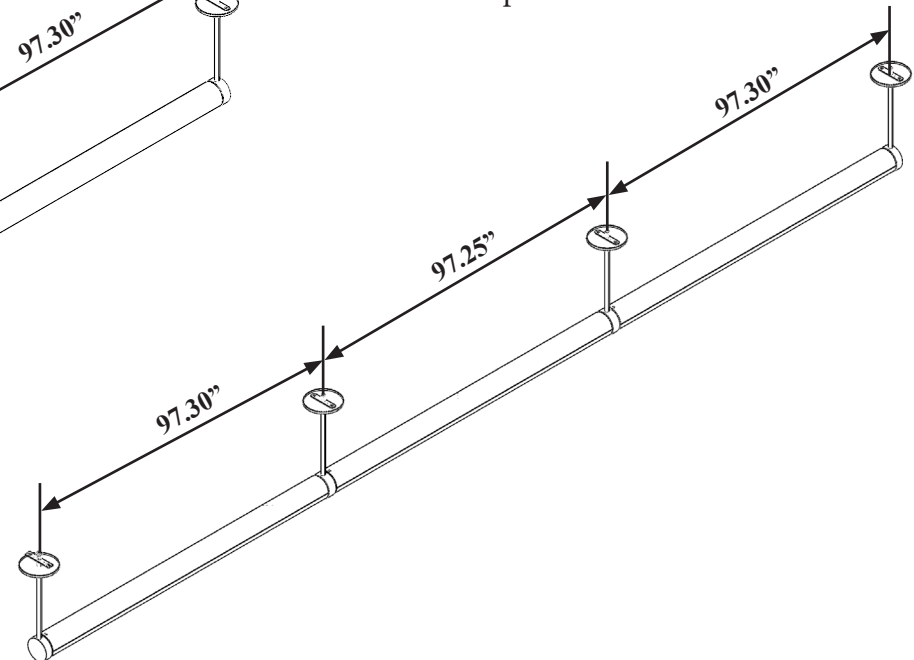


INSTALLATION INSTRUCTIONS

Individual Surface Mount (SM)


1

Power must be turned off prior to disconnecting or reconnecting fixture.

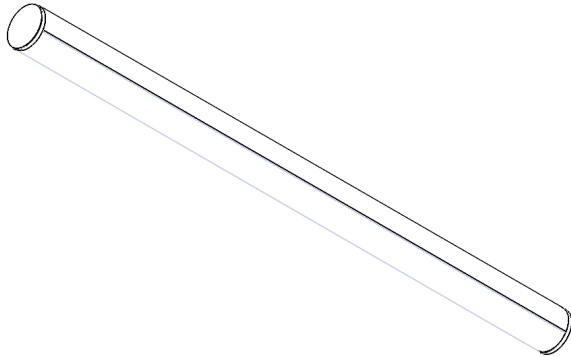


2

Remove lens by prying one edge out with a slim tool. Be careful not to damage the lens.

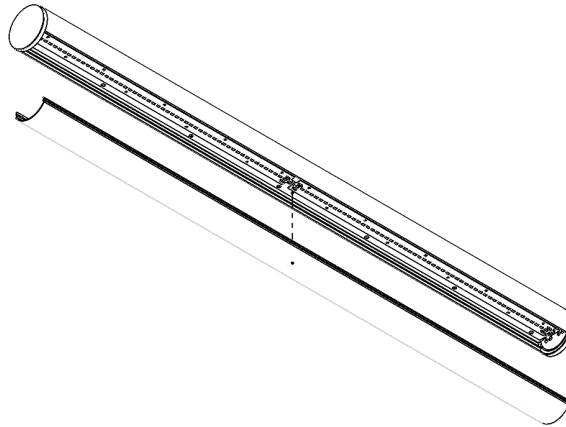

3

Remove screws from the reflective plate as shown below. Tilt reflector and remove from the fixture. Support fixture and reflector near mounting surface. Connect fixture to building mains. See wiring below.

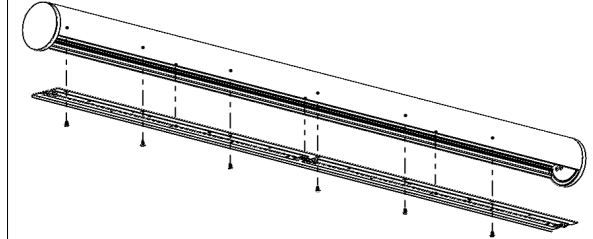


Wire Colors (standard)

Black	Hot
White	Neutral
Green	Ground
Purple	+ Dim (0-10v)
Gray	- Dim (0-10v)


4

Mounting hole locations are shown below. Place fixture against surface, and securely attach to structure with hardware provided by others.

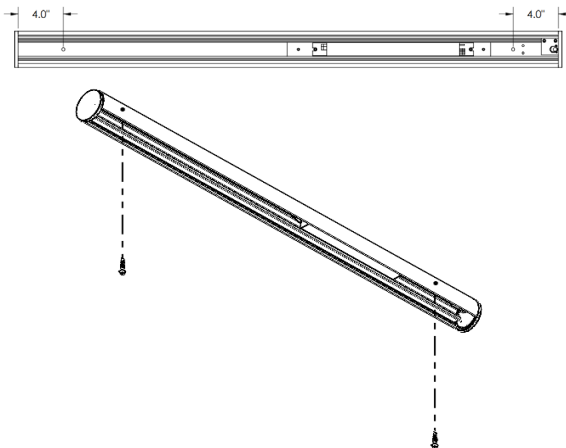

5

Replace reflector as previously installed, and reattach using machine screws.

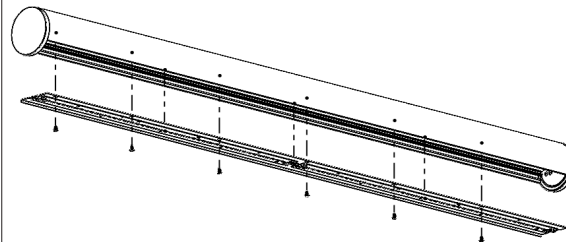

6

Reinstall lens by pressing into place. Restore power.

